



FOODSERVICE EQUIPMENT PRICE LIST

RUPEE - SEPTEMBER 1, 2025





People who serve,
products that solve.

How to Order

To ensure prompt and accurate processing of your order, please provide the following information:

1. Model number, voltage, Hertz and phase.
2. Specify options and accessories as required. Options are not retrofittable.
3. Consult factory when ordering equipment for special applications.
4. E-mail orders are acceptable and do not require confirmation.
5. See Resources section in back of book for more information.

ALL WATT RATINGS ARE NOMINAL. ACTUAL WATTAGE MAY VARY. CONSULT FACTORY FOR MORE INFORMATION.

E-mail orders to:
ordersindia@hatcocorp.com.

Technical Service Questions:
technicalserviceindia@hatcocorp.com

Parts and Equipment Questions:
customerserviceindia@hatcocorp.com

Hatco Foodservice Equipment India Private Limited

Hatco India registered office:
54- Deepak Building
13 - Nehru Place
New Delhi - 110019 India
GSTIN - 07AAFCH1234H1ZW

Warehouse/Customer Service
Support +91-8870-920-999:

No 5/486-1,
C Krishna Group Compound,
SIPCOT Post, Hosur,
Krishnagiri District,
Tamil Nadu, 635126,
India

www.hatcocorp.com

Who We Are

Since 1950, Hatco has been a leader in creating innovative ideas for the foodservice industry: bold innovations in equipment that improve efficiency, reliability and profits. Products are designed and built to handle the rugged demands of today's foodservice operations. Hatco is a company dedicated to exceptional customer service and quality engineered equipment offering maximum performance.

We Pride Ourselves On Being Employee Owned

The company was started by Gordon and LaReine Hatch in 1950 and was led by their son, David, beginning in 1990. In 2004, Hatco Corporation began the journey of employee ownership and in 2007, a monumental event in Hatco history occurred: the employees assumed 100% ownership from David Hatch! Hatco still remains a family corporation - only now our family is larger. The employee owners are driven by the spirit of ownership and motivated by the empowerment of ownership.

Equipment


Built-In Hot Shelves
Carving Stations
Cold Shelves
Decorative Lamps
Display Lights
Drawer Warmers
Frost Tops

Fry Stations
Heated Display Cases
Heated Wells
Holding & Display Cabinets
Heated Air Curtains
Hot Water Dispensers
Hot/Cold Shelves

Ice Wells
Induction
Light Cooking Equipment
Merchandising Warmers
Mini Display Warmer
Pizza Warmers
Plate Warmers

Portable Holding Cabinets
Portable Food Warmers
Refrigerated Wells
Salamanders
Strip Heaters
Toasters
Waffle Makers

Locations

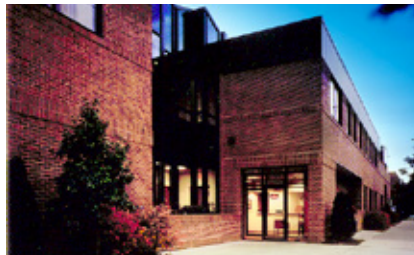

Milwaukee - Corporate Office
635 South 28th St. | Milwaukee, WI 53215
414-671-6350



Sturgeon Bay - Manufacturing Facility
208 East Deck Street | Sturgeon Bay, WI 54235
920-743-5595



Table of Contents

TOASTERS	2-9	BUILT-INS	86-103
WELLS	10-39	DRAWER WARMERS	104-110
DECORATIVE LAMPS & DISPLAY LIGHTS	40-48	HEATED MERCHANDISERS	111-125
STRIP HEATERS	62-74	HOLDING & DISPLAY CABINETS	126-141
FRY STATIONS	65-69	INDUCTION EQUIPMENT	136-145
CARVING STATIONS	70-72	LIGHT COOKING EQUIPMENT	147-158
PORTABLES	73-85	SPECIALTY WATER EQUIPMENT	153-154

CDW.....	107	GRBW.....	84-85	HWB-43.....	28-29, 32, 35-36
CSSBR, CSSBX.....	90	GRCD, GRCDH.....	122-123	HWB-xQT.....	28-29, 33, 35-36
CSSBFR, CSSBFX.....	91	GRCMW.....	121	HWBI, HWBI43.....	22-24, 27, 35-36
CSUR, CSUX.....	93	GRCSCL, GRCSCLH.....	72	HWBI-S.....	25-27, 35-36
CSBFR, CSBFX.....	92	GRFF, GRFFL, GRFFB, GRFFBL.....	66-67	HWBI-xQT.....	28-29, 34, 35-36
CWBR, CWBX.....	16-17, 19	GRFHS, GRFS.....	68-69	HXMH, HXMH-xxD.....	117-118
CWBR-S, CWBX-S.....	16, 18-19	GRH.....	63-64	HXMS, HXMS-xxD.....	117-118
DCS.....	71	GRHD, GRHDH.....	124-125	IHDCH.....	134-135
DCSB2..... <i>NEW</i>	71	GRHW.....	83	IRNG-PC1, -PB1.....	140-141
DL, DLL, DLH.....	41-46	GRS2GC.....	127	IRNG-PC2, -PB2.....	142-143
FDWD-1-MN.....	137	GRS.....	80-82	ITQ.....	3
FDWDE.....	129, 133	GRSB.....	100-101	IWB, IWB-S.....	13-15
FM-5.....	154	GRSBF.....	102-103	IWELB-FUL-A.....	139
FS2HAC.....	141	GRSDH, GRSDH-xxD.....	113-114	IWRM.....	144-145
FSD, FSDT.....	130-133	GRSDS, GRSDS-xxD.....	113-114	MDW.....	136
FSHAC.....	141	GRSDS/H.....	112	PG14..... <i>NEW</i>	149
FSHC-6W.....	139	GRSR.....	74	PWB, PWC.....	128
FSHC-7.....	140	GRSS.....	77	RCTHW2.....	39
FSHC-EE.....	138	GRSSB.....	97	RCTWM.....	151
FST-1-MN.....	137	GRSSR, GRSSR20-DL77516.....	75-76	RHW..... <i>NOT AVAILABLE</i>	38
FTBR, FTBX.....	20-21	HBG.....	78	RHW2..... <i>NEW</i>	11
FTBR-S, FTBX-S.....	20-21	HBGB, HBGBH.....	98-99	RMBs.....	73
FWM.....	150	HCSBFR, HCSBFX.....	96	SNACK.....	152
GM5AH.....	49, 51	HCSSBR, HCSSBX.....	94	TK.....	9
GM5AHL.....	50-51	HCSSBFR, HCSSBFX.....	95	TM.....	6
GMFFL.....	66	HDM.....	105	TM3.....	5
GMHD, GMHDH.....	120	HDW.....	108-110	TMS.....	158
GR2BW.....	84-85	HDWTC.....	106	TMS2.....	157
GR2SDH, GR2SDH-xxD.....	115-116	HDW-xR2.....	108, 110	TPT.....	4
GR2SDS, GR2SDS-xxD.....	115-116	HGSM.....	79	TQ.....	8
GR3SDS-xxDCT, GR3SDS-xxTCT.....	119	HSBF-GL, -HC, -SS.....	87-89	TQ3.....	7
GRAH, GRAHL.....	63-64	HLC5.....	47	UGAH, UGAHL.....	69, 71
GRAH-xxD, GRAHL-xxD.....	65-66	HW-13.....	12	UGAH-xxD, UGAHL-xxD.....	70-71
GRAIH, GRAIH-xxD.....	67-68	HW-FUL.....	37, 35-36	UGFF, UGFFL, UGFFB, UGFFBL.....	66-67
GR-B.....	66	HWB-FUL.....	28-31, 35-36		

Toasters



Intelligent Toast-Qwik®

Hatco's Intelligent Toast-Qwik® allows the operator to toast multiple products at the touch of the button, changing easily from bagels and toast to hash browns and garlic bread to crumpets and croissants, as well as melting cheese and finishing smaller food products. The unit can easily take the place of the current toasting platform and add versatility and future menu expansion along with energy efficiency and cost savings.

- The conveyor toaster can operate in three different modes:
 - ~ Continuous Throughput
 - ~ In and Reverses Out Mode
 - ~ In, Pause, then Continues Through
- USB port located on the front allows for easy transfer of information such as program changes and product usage information
- The ability to program up to twenty product settings
- Hatco's patented ColorGuard Sensing System monitors and adjusts conveyor

speed and temperature during high usage periods to ensure toast color uniformity

- Using Hatco's Spot-On® Technology, the toaster senses when product is placed on the conveyor and activates the unit

Spot-ON®
Technology

- Easy to clean, with removable crumb tray and collector ramp. There is minimal operator maintenance required, with self-cleaning elements and no maintenance motor and conveyor drives



ITQ-875-1C



ITQ-1000-1C



ITQ-1750-2C

HORIZONTAL CONVEYOR TOASTERS

Model	Dimensions (W x D x H)	Voltage	Watts	Amps	Capacity/Minute [□]	Approx. Ship Weight	List Price
ITQ-875-1C	370 x 727 x 420 mm	230	2700	11.8	15	41 kg	₹591276
ITQ-1000-1C*	450 x 727 x 457 mm	230	3600	15.7	17	40 kg	603876
ITQ-1750-2C*	513 x 728 x 470 mm	230	4960	21.6	30	48 kg	802284

□ Toasting capacity may vary by product. Toasting of coated products not recommended.

* Cord without plug.

All Horizontal Conveyor Toaster Models Feature:

Opening Dimensions – ITQ-875-1C: 154 W x 56 H mm.

ITQ-1000-1C: 240 W x 51 H mm.


ITQ-1750-2C: Two openings at 150 W x 56 H mm.

Cord Location: Back of unit, lower left center.

ACCESSORIES (available for purchase at any time)

Paddle, with high temp, non-stick coating –

ITQ1C-PAD	229 mm wide Food Paddle for ITQ-1000-1C model only	₹17976
ITQ2C-PAD	144 mm wide Food Paddle for ITQ-875-1C and ITQ-1750-2C models	13776
ITQ2CFEED175	Feed Ramp for ITQ-1750-2C model only	8400

ITQ2C-PAD
Accessory



September 1, 2025

Pop-Up Toaster

Perfect for self-serve areas and light volume applications, the Hatco Pop-Up Toasters provide even golden toasting of a variety of bread products. The durable stainless steel housing contains four self-centering slots with individual toasting controls and removable crumb tray.

- Evenly toasts a variety of bread products including bagels, waffles and English muffins
- Four self-centering 32 mm wide slots
- A selector switch for single- (or double-) sided toasting
- Durable stainless steel construction
- Individual toasting controls
- Removable crumb tray for easy cleaning
- 1829 mm cord with plug




TPT-230-4

POP-UP TOASTER

Model	Dimensions W x D x H	Slot Opening W x D	Voltage Single Phase	Watts	Amps	Approx. Ship Weight	List Price
TPT-230-4	346 x 313 x 204 mm	32 x 140 mm	230	2388	10.4	8 kg	₹44856

All Pop-Up Toaster Model Feature:

Cord Location: 1829 mm cord – back of unit, lower center.



TOAST-MAX® Conveyor Toasters

The TOAST-MAX® Electric Conveyor Toaster is fast, reliable and versatile, toasting up to 350 bread or bun products per hour, depending on bread type. Featuring long-lasting serpentine metal sheathed heating elements and a permanently lubricated conveyor motor.

- Durable stainless steel construction
- Patented ColorGuard Sensing System ensures toast color uniformity
- Power Save mode with indicator light saves energy during off-peak periods
- Allows for toasting bread products up to 76 mm thick
- Utilizing conveyor speed, not temperature, to determine toasting color, allows for instant adjustment of toasting time
- Units are shipped with 25 mm adjustable legs, feed ramp, removable crumb tray and a catch tray



TM3-10H in Designer Black, Designer Warm Red and Standard Stainless Steel

TOAST-MAX CONVEYOR TOASTERS

Model	Dimensions W x D x H	Opening Dimensions W x H	Voltage Single Phase	Watts	Amps 50/60Hz	Capacity/ Hour [□]	Approx. Ship Weight	List Price
TM3-5H	290 x 535 x 412 mm	186 x 76 mm	230	1445	6.3	190-230	16 kg	₹ 90132
TM3-10H	368 x 535 x 411 mm	264 x 76 mm	230	2100	9.1	290-350	19 kg	117180

□ Toasting capacity may vary by product. Toasting of coated products not recommended.

All TOAST-MAX Models Feature:

Shipped With: 25 mm adjustable legs, feed ramp, removable crumb tray and a catch tray.

Cord Location: Back of unit, lower right corner.

OPTIONS (available at time of purchase only)


Designer Colors – Non-standard colors are non-returnable – Stainless Steel Standard –

RED	Warm Red	No Charge
BLACK	Black	No Charge

ACCESSORIES (available for purchase at any time)

TM3-10-BUNFEED	Extended Feed Ramp for Buns (TM3-10H model only)	₹1512
TM3-10-SECURITY	Control Cover and Bracket (TM3-10H model only)	3864

COLORS AND FINISHES – INSIDE BACK COVER





TOAST-MAX® Conveyor Toasters

Flexibility and performance are yours with Hatco's economical line of TOAST-MAX® Conveyor Toasters. Using conveyor speed, not temperature, to determine toasting color allows for instant adjustment of toasting time.

- Long-lasting serpentine metal sheathed heating elements
- 102 mm adjustable legs
- Permanently lubricated 50/60 Hz motor
- V-shaped reflectors help capture and redirect heat
- 50 mm clearance to accommodate all types of bread products
- Discharge and crumb trays are removable for easy cleaning
- Efficient design of front or rear discharge allows unit to be placed where it is most convenient for sending product to the operator side or to the customer/server side



TM-5H



TM-10H

TOAST-MAX CONVEYOR TOASTERS

Model	Dimensions W x D x H [↔]	Opening Dimensions W x H	kW	Voltage Single Phase	Amps 50/60Hz	Capacity Per Minute [□]	Approx. Ship Weight	List Price
TM-5H	290 x 419 x 387 mm	186 x 88 mm	1.3-1.6	230	6.4	3 slices	16 kg	₹85008
TM-10H	368 x 419 x 387 mm	264 x 88 mm	1.9-2.3	230	9.2	6 slices	19 kg	94164


[↔] Add 196 mm to depth if using tray extension in rear. Height includes legs.

[□] Toasting capacity may vary by product. Toasting of coated products not recommended.

All TOAST-MAX Models Feature:

Bread Types: Bread or buns.

Cord Location: 1829 mm on left side of back of unit near bottom.



Toast-Qwik® Conveyor Toasters

Hatco's industry-leading Toast-Qwik® Toasters have been completely redesigned to provide a great new look, easy to use touchscreen controller, and increased production capabilities. They continue to provide the best reliability, flexibility, and value of any conveyor toaster available!

- Patented ColorGuard Sensing System continually monitors chamber temperature and adjusts the chamber to ensure consistent toast results – even in your busiest periods
- Dynamic new touchscreen controller that is easier to see and use!
- Up to 12 programmable settings for precise and instant product changes
- USB port for easy uploads of program changes and software updates
- Unique new toast delivery ramp moves your product to the storage tray each and every time
- Crumb tray is removeable for easy cleaning
- 51 mm high opening standard - 76 mm high opening on the TQ3-500H, -900H and -2000H models for thicker bread products



TQ3-20H
in standard
Designer Black



TQ3-500
shown in optional
Designer Warm Red



TQ3-900H
shown in standard
Designer Black



TQ3-2000
shown in optional
Stainless Steel

HORIZONTAL CONVEYOR TOASTERS

Model	Dimensions (W x D x H) Height includes legs	Opening Dimensions W x H	Voltage	Watts	Amps 50/60Hz	Capacity/ Minute [□]	Approx. Ship Weight	List Price
TQ3-20	373 x 524 x 435 mm	263 x 51 mm	220-230 230-240	2260-2470 2268-2470	10.3-10.7 9.9-10.3	10-12 slices	25 kg	₹355320
TQ3-20H	373 x 524 x 435 mm	258 x 76 mm	220-230 230-240	2397-2620 2406-2620	10.9-11.4 10.5-10.9	10-12 slices	25 kg	362712

HORIZONTAL CONVEYOR TOASTERS

Model	Dimensions (W x D x H) Height includes legs	Opening Dimensions W x H	Voltage	Watts	Amps 50/60Hz	Capacity/ Minute [□]	Approx. Ship Weight	List Price
Toasts Two Slices Wide								
TQ3-500	374 x 524 x 435 mm	258 x 51 mm	220-230	2031-2220	9.2-9.7	7-8 slices	25 kg	₹272580
TQ3-500H	374 x 524 x 435 mm	258 x 76 mm	220-230	2031-2223	9.2-9.7	7-8 slices	25 kg	272580
TQ3-900	374 x 524 x 435 mm	258 x 51 mm	220-230	2763-3020	12.6-13.1	15 slices	25 kg	290892
TQ3-900H	374 x 524 x 435 mm	258 x 76 mm	220-230	2763-3020	12.6-13.1	15 slices	25 kg	290892
Toasts Three Slices Wide								
TQ3-2000*	475 x 536 x 436 mm	359 x 51 mm	220-230	3678-4020	16.7-17.5	33 slices	30 kg	₹365400
TQ3-2000H*	475 x 536 x 436 mm	359 x 76 mm	220-230	3678-4020	16.7-17.5	33 slices	30 kg	365400

[□] Toasting capacity may vary by product. Toasting of coated products not recommended.

* Cord without plug.

All Horizontal Conveyor Models Feature:


Cord Location: 1829 mm cord – lower right corner on back of unit.

OPTIONS (available at time of purchase only)

Designer Color Side Panels – Non-standard colors are non-returnable – Designer Black Standard –

SS	Stainless Steel	₹22344
WRED	Designer Warm Red	No Charge
SSINSERT	Stainless Steel toast tray insert (for TQ3-500 and -900 series only)	₹ 4284
TQ3-RAMP	Extended feed ramp in lieu of existing ramp - adds 76 mm	11508
TQ3-RAMP-XL	XL extended feed ramp in lieu of existing ramp - adds 229 mm (on TQ3-500 and -900 models only)	4284

COLORS AND FINISHES – INSIDE BACK COVER





Toast-Qwik® Conveyor Toasters

Flexibility and performance are yours with Hatco's high capacity line of Toast-Qwik® Toasters. Using conveyor speed, not temperature, to determine toasting color allows for instant adjustment of toasting time. Toast-Qwik features the patented ColorGuard Sensing System for consistently toasted product.

- Instant and precise adjustment of toast color with electronic infinite controls that regulate top and bottom heat
- Optional Power Save Mode conserves energy
- Capacity of 400-1800 slices per hour, depending on bread type
- Opening height for H and HBA models is 76 mm, for all other models the opening height is 51 mm
- Insulation and an interior fan provide cool surface temperatures
- Efficient design of front or rear discharge allows unit to be placed where it is most convenient – for sending product to the operator side or to the customer/server side
- BA models toast one side only and are for bagels and buns, cut side up



TQ-400



TQ-1800

TOAST-QWIK CONVEYOR TOASTERS

Model	Dimensions W x D x H*	Opening Dimensions W x H	Voltage Single Phase	Watts	Amps 50/60Hz	Capacity/ Minute [‡]	Approx. Ship Weight	List Price
TQ-400	368 x 451 x 378 mm	263 x 51 mm	220-230	1860-2030	8.5-8.8	6 slices	21 kg	₹262500
TQ-400BA [▲]	368 x 451 x 378 mm	263 x 51 mm	220-230	1765-1930	8.0-8.4	6 slices	21 kg	262500
TQ-400H	368 x 451 x 403 mm	263 x 76 mm	220-230	2131-2330	9.7-10.0	6 slices	21 kg	262500
TQ-800	368 x 578 x 422 mm	265 x 51 mm	220-230	3019-3300	13.7-14.4	14 slices	28 kg	298704
TQ-800BA [▲]	368 x 578 x 422 mm	265 x 51 mm	220-230	2791-3050	12.7-13.3	14 slices	28 kg	298704
TQ-800H	368 x 578 x 422 mm	265 x 76 mm	220-230	3019-3300	13.7-14.4	14 slices	28 kg	298704
TQ-800HBA [▲]	368 x 578 x 422 mm	265 x 76 mm	220-230	2791-3050	12.7-13.3	14 slices	28 kg	298704

Toasts Three Slices Wide

TQ-1800*	470 x 577 x 421 mm	367 x 51 mm	220-230	3731-4078	17.0-17.7	30 slices	33 kg	₹370944
TQ-1800BA ^{▲*}	470 x 577 x 421 mm	367 x 51 mm	220-230	3849-4206	17.5-18.3	30 slices	33 kg	370944
TQ-1800H*	470 x 577 x 421 mm	367 x 76 mm	220-230	3907-4271	17.8-18.6	30 slices	33 kg	370944
TQ-1800HBA ^{▲*}	470 x 577 x 421 mm	367 x 76 mm	220-230	3849-4206	17.5-18.3	30 slices	33 kg	370944

* TQ-400, TQ-400BA and TQ-400H add 64 mm to depth if using tray extension in rear.

TQ-800, TQ-800BA, TQ-800H, TQ-800HBA, TQ-1800, TQ-1800BA, TQ-1800H and TQ-1800HBA, add 165 mm to depth if using tray extension in rear. Height includes legs.

‡ Toasting capacity may vary by product. Toasting of coated products not recommended.

▲ BA models toast one side only and are for bagels and buns, cut side up.

* Cord without plug.

All Toast-Qwik Models Feature:

Cord Location: 1829 mm - back of unit, lower right side.


OPTIONS (available at time of purchase only)

TQ-PWR-A	Automatic Power Save Mode (Switches to Power Save Mode after 30 minutes of inactivity)	No Charge
----------	---	-----------

ACCESSORIES (available for purchase at any time)

TQRAMP	Extended Feed Guide adds 76 mm (excluding TQ-1800 models)	₹11676
TQ2-SECURITY	Control Cover and Bracket (excluding TQ-1800 models)	10752

TQ-800BA with
accessory security
control cover

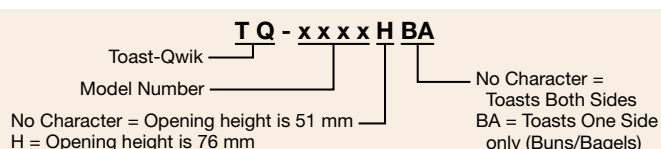

Toast King® Conveyor Toasters

Designed for mid- to high-volume and constant flow applications, Hatco's proven reliability and performance makes the TK toasters the workhorse of your operation. These toasters use conveyor speed, not temperature, to determine toast color.

- Toasts a variety of bread products
- Stainless steel construction for years of trouble-free service
- Power-saving thermostat for energy savings during non-peak times
- Manual advance and speed control
- Fully insulated for cooler operation
- Multiple metal sheathed toasting elements

- Toast storage area keeps bread warm and dry
- Capacity of 720-1320 slices per hour
- Three basket access for fast loading
- Top venting keeps heat away from the operator

TK-72



TK-135B



TOAST KING CONVEYOR TOASTERS

Model	Dimensions** W x D x H	Basket Size W x H	kW	Voltage Single Phase	Amps 50Hz	Capacity Per Minute□	Approx. Ship Weight	List Price
Bread or Buns								
TK-72	464 x 445 x 844 mm	254 x 117 mm	4.0	220	18.4	12 slices	33 kg	₹463260
TK-100	578 x 445 x 844 mm	368 x 117 mm	5.0	220	22.9	16 slices	40 kg	495348
Buns								
TK-135B	578 x 445 x 844 mm	368 x 117 mm	4.3	220	19.7	22 slices	40 kg	₹495516

** Width includes 19 mm for manual advance knob. Depth includes tray extension of 89 mm.

□ Toasting capacity may vary by product. Toasting of coated products not recommended.

All Toast King Models Feature:

Maximum Product Thickness: 32 mm.


Cord Location: 1219 mm Cord – Back of unit, lower left side.

OPTIONS (available at time of purchase only)

TK-SECURITY	Control Cover, Bracket, Mounting Hardware and Fuse Cover	₹21252
--------------------	--	---------------

ACCESSORIES (available for purchase at any time)

4"LEGS	102 mm Adjustable Legs (4)	₹5544
---------------	----------------------------	--------------



Heated & Cold Wells



HEATMAX Round Heated Wells



The new multipurpose Heated Well from Hatco offers the flexibility of food warmers, soup kettles, Bain-Marie heaters, steamers and pasta cookers all in one! With an improved control interface and the ability to go from Heat to Hold mode with the press of a button, HEATMAX can boil pasta and soup noodles, steam dim sum and warm and hold soups, curry, gravies and toppings at safe-serving temperatures.

- Features a temperature button, up and down arrows to select the desired holding temperature between 40°C to 95°C (104°F to 203°F), and an improved electronic controller to monitor the temperature for optimum results.
- Low power mode saves energy during off-peak hours
- Audible alert sounds when well runs dry
- Operable in Heat or Hold Mode, with a button to toggle between the two. A timer button can be set between 1-360 minutes for Hold Mode or between 1-120 minutes for Heat Mode, and the unit switches to Hold Mode automatically after the timer counts down in Heat Mode

- Built-in model available with one well and a 10-liter round pan
- Freestanding models available with one or two individually controlled wells, with a 10-liter round pan included per well

RHW2-1
includes one well
with 10-liter pan
and hinged lid



RHW2-2
includes two wells with
two 10-liter pans and
hinged lids (not shown)



FREESTANDING ROUND HEATED WELLS

Model	Voltage Single Phase	Dimensions W x D x H	kW	Amps	Hz	Approx. Ship Weight	List Price
RHW2-1	220-240	360 x 330 x 355 mm	1.2-1.3	5.2-5.7	50/60	12 kg	₹ 65856
RHW2-2	220-240	630 x 330 x 355 mm	2.3-2.7	10.4-11.3	50/60	14 kg	106932

All Freestanding Round Heated Well Models Feature:

Liquid Capacity: RHW2-1: 10 liter pan. Actual pan capacity: 6 liters for boiling application or 8 liters for warming application.

RHW2-2: 2 x 10 liter pans. Actual pan capacity: 2 x 6 liters for boiling application or 2 x 8 liters for warming application.

RHW2-1 Shipped with: One food holding pan and one pan lid.

RHW2-2 Shipped with: Two food holding pans and two pan lids.

Cord Location: 1830 mm cord and plug, back of unit.

BUILT-IN ROUND HEATED WELL

Model	Voltage Single Phase	Dimensions W x D x H	kW	Amps	Hz	Approx. Ship Weight	List Price
RHW2-1B	220-240	360 x 330 x 341 mm	1.2-1.4	5.2-5.7	50/60	10 kg	₹64260

All Built-In Round Heated Well Models Feature:

Liquid Capacity: 10 liters. Actual pan capacity: 6 liters for boiling application or 8 liters for warming application.

RHW2-1B Shipped with: One food holding pan, one pan lid and remote control.

Cord Location: 2000 mm cable from well to control box with a 1830 mm cord and plug located at the back of the control box.



Recommended Well Cut-Out Size: 305 mm diameter.

ACCESSORIES (pricing applies only at time of equipment purchase)


RHW -

RHW-11QT-LID-HG	RHW Hinged Lid for 10-liter Round Pan	₹ 8988
RHW-11QT-POT	RHW 10-liter Round Pan	11928
RHW1-CTL-ADP	RHW Control Panel Adapter	30660

RHW1-CTL-ADP
Control Panel
Adapter[Ⓐ]




RHW-11QT-LID-HG
Hinged lid for
10-liter round pan



RHW-11QT-POT
10-liter
round pan

[Ⓐ] Only required when replacing a RHW-1B control panel with a RHW2-1B control panel



NOTE: Install Remote Box outside Heat Zone or damage will occur.

HW-13 Countertop Heated Well

Providing versatility and reliability, Hatco Countertop Heated Wells keep food hot and fresh with an adjustable thermostat. The compact HW-13 model has a smaller countertop footprint and is capable of efficiently holding a 1/3-size pan or two 1/6-sized pans.

- Control panel features a lighted On/Off rocker switch and adjustable temperature dial
- Dry indicator light protects the unit from running dry for long periods of time
- Non-exposed heating elements provide ease of cleaning
- Anti-drip design of the well edge prevents water, sauce and condensation from flowing to the outside of the unit



HW-13

HOLD ONLY COUNTERTOP - 1/3 - SIZE WELL

Model	Dimensions W x D x H	Voltage	Watts	Amps	Ship Weight	List Price
HW-13	224 x 399 x 260 mm	220-230V	315/345	1.5	5 kg	₹37716

All Countertop Heated Well Models Feature:


Voltage: Single Phase.

Cord Location: Bottom left corner on back of unit.

Models Shipped with: 1/3-size stainless steel pan, stainless steel (aluminized stainless steel bottom) housing with a metal sheathed heating element, a power On/Off switch, a temperature control, a dry unit indicator light and a 1829 mm cord with plug attached.

ACCESSORIES *(available for purchase at any time)*

ST PAN 1/3	Third-Size Stainless Steel Pan - 324 mm W x 175 mm D x 64 mm H	₹5712
-------------------	--	--------------



Drop-In Ice Wells

Hatco Drop-In Ice Wells provide all the quality features of our Refrigerated Drop-Ins, but without any refrigeration or electrical components. These ice-cooled, insulated units can hold prechilled food products at preferred serving temperatures. Ideal for salad bars, cold buffets and chilled beverage bars. Pan dividers give you greater flexibility in your variety of featured food products.


- Full-size, insulated, top mount wells available to hold 1- to 6-pan configurations
- Optimal insulation on sides and bottom to ensure better cold retention and cost savings

- Bezel design allows clear viewing and easy food access
- Larger 1" NPT (National Pipe Thread) brass drain with flat screen simplifies cleaning
- False bottom accessory conveniently holds ice above drain for ease of draining
- Matches the Hatco line of Wells for a fully integrated look



IWB-6
with an accessory
food pan (bowls
not available) and an
optional gasket

**IWB-2 with slant
option IWB-2SLANT**

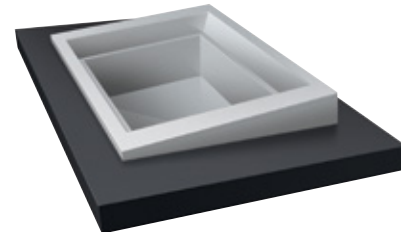

DROP-IN INSULATED ICE WELLS

Model	Dimensions W x D x H	Approx. Ship Weight	List Price
IWB-1	483 x 686 x 305 mm	28 kg	₹164724
IWB-2	813 x 686 x 305 mm	38 kg	189756
IWB-3	1143 x 686 x 305 mm	46 kg	219828
IWB-4	1473 x 686 x 305 mm	65 kg	254772
IWB-5	1803 x 686 x 305 mm	50 kg	294924
IWB-6	2134 x 686 x 305 mm	82 kg	340116




OPTIONS (available at time of purchase only)

Slant Options –

IWB-1SLANT	Slant Option for IWB-1	₹24192
IWB-2SLANT	Slant Option for IWB-2	26040
IWB-3SLANT	Slant Option for IWB-3	27972
IWB-4SLANT	Slant Option for IWB-4	29820
IWB-5SLANT	Slant Option for IWB-5	31752
IWB-6SLANT	Slant Option for IWB-6	33600

Gasket Options –

BEZELGASKET-1	Factory installed for IWB-1	₹ 7812
BEZELGASKET-2	Factory installed for IWB-2	7812
BEZELGASKET-3	Factory installed for IWB-3	10248
BEZELGASKET-4	Factory installed for IWB-4	10248
BEZELGASKET-5	Factory installed for IWB-5	11004
BEZELGASKET-6	Factory installed for IWB-6	11004

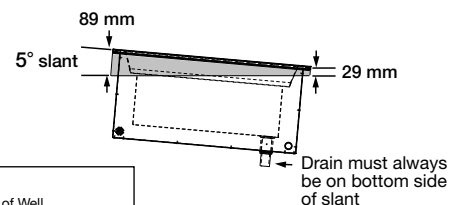


BEZELGASKET-1
Factory installed option
(eliminates the need for silicone
or other sealants)

DROP-IN ICE WELL COUNTERTOP CUT-OUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
IWB-1	435 mm	457 mm	640 mm	660 mm
IWB-2	765 mm	787 mm	640 mm	660 mm
IWB-3	1095 mm	1118 mm	640 mm	660 mm
IWB-4	1426 mm	1448 mm	640 mm	660 mm
IWB-5	1756 mm	1778 mm	640 mm	660 mm
IWB-6	2086 mm	2108 mm	640 mm	660 mm

ACCESSORY PANS, SUPPORT BARS AND LIDS – PAGE 15




Drop-In Slim Ice Wells

Hatco Drop-In Ice Slim Wells provide all the quality features of our Refrigerated Drop-Ins, but without any refrigeration or electrical components. Now available in a slim configuration providing customers with a complete well within easy reach, regardless of the sneeze guards.

Ideal for salad bars, cold buffets and chilled beverage bars. Pan dividers give you greater flexibility in your variety of featured food products.

- Holds 1- to 4-full-size pan configurations, but placed lengthwise
- Optimal insulation on sides and bottom to ensure better cold retention and cost savings
- Bezel design allows clear viewing and easy food access
- Larger 1" NPT (National Pipe Thread) brass drain with flat screen simplifies cleaning
- False bottom accessory conveniently holds ice above drain for ease of draining
- Matches the Hatco line of Wells for a fully integrated look

IWB-S4
with optional
IWB-S4SLANT

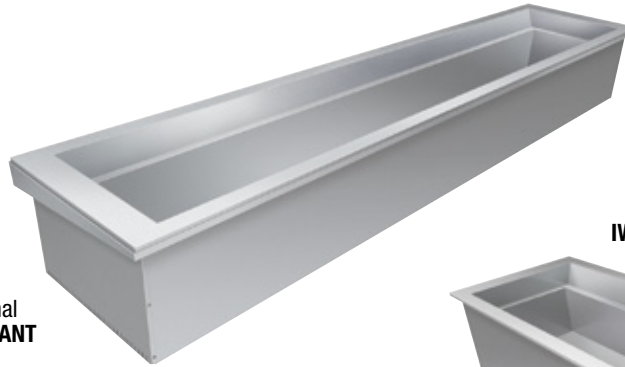

IWB-S2



DROP-IN INSULATED SLIM ICE WELLS



Model	Dimensions W x D x H	Approx. Ship Weight	List Price
IWB-S1	687 x 481 x 306 mm	26 kg	₹171024
IWB-S2	1222 x 481 x 306 mm	48 kg	196056
IWB-S3	1757 x 481 x 306 mm	66 kg	226128
IWB-S4	2292 x 481 x 306 mm	92 kg	261072

OPTIONS (available at time of purchase only)


Slant Options –			
IWB-S1SLANT	Slant Option for IWB-S1		₹24192
IWB-S2SLANT	Slant Option for IWB-S2		26040
IWB-S3SLANT	Slant Option for IWB-S3		27972
IWB-S4SLANT	Slant Option for IWB-S4		29820

Gasket Options –			
BEZELGASKET-S1	Factory installed for IWB-S1		₹ 7812
BEZELGASKET-S2	Factory installed for IWB-S2		7812
BEZELGASKET-S3	Factory installed for IWB-S3		10248
BEZELGASKET-S4	Factory installed for IWB-S4		10248

Slant Option for: IWB-S1, -S2, -S3, -S4

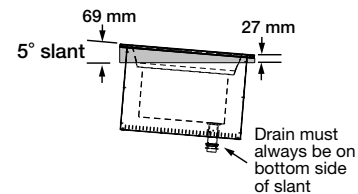


BEZELGASKET-S1 Factory installed option (eliminates the need for silicone or other sealants)



DROP-IN SLIM ICE WELLS COUNTERTOP CUT-OUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
IWB-S1	641 mm	662 mm	433 mm	456 mm
IWB-S2	1175 mm	1196 mm	433 mm	456 mm
IWB-S3	1710 mm	1731 mm	433 mm	456 mm
IWB-S4	2245 mm	2266 mm	433 mm	456 mm

ACCESSORY PANS, SUPPORT BARS AND LIDS – PAGE 15




Drop-In Ice Well Accessories *(available for purchase at any time)*



IWB-6
with accessory food pan
(bowls not available)



HDW 6" PAN

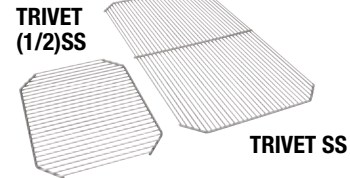


Wells

PANS – TRIVETS *(available for purchase at any time)*

ST PAN 1/3	Third-Size Stainless Steel Pan – 324 W x 175 D x 64 H mm	5712
ST PAN 1/2	Half-Size Stainless Steel Pan – 324 W x 264 D x 64 H mm	6552
ST PAN 2	Full-Size Stainless Steel Pan – 324 W x 527 D x 64 H mm	7812
ST PAN 4	Full-Size Stainless Steel Pan – 324 W x 527 D x 102 H mm	9828
HDW 6" PAN	Full-Size Stainless Steel Pan – 324 W x 527 D x 152 H mm	10668
Wire Trivets Stainless –		
TRIVET (1/2)SS	Half-Size – 259 W x 194 D mm	10584
TRIVET SS	Full-Size – 259 W x 457 D mm	14700

Support Bars

Choose the appropriate
kit for CWB or IWB
series

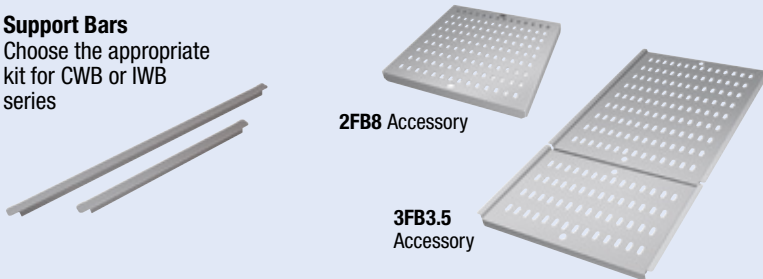

SUPPORT BARS – FALSE BOTTOMS *(available for purchase at any time)*

Bars –		
CWB12BAR	305 mm Pan Support Bar for Drop-In Ice or Refrigerated Wells	₹2016
CWB20BAR	508 mm Pan Support Bar for Drop-In Ice or Refrigerated Wells	2352
False Bottoms for Ice Wells (allows for 89 mm of ice and sits on ledge of well) –		
1FB3.5	For IWB-1 models (includes one 1-pan Insert)	₹ 9156
2FB3.5	For IWB-2 models (includes one 2-pan Insert)	16716
3FB3.5	For IWB-3 models (includes one 1-pan Insert and one 2-pan Insert)	24276
4FB3.5	For IWB-4 models (includes two 2-pan Insert)	31836
5FB3.5	For IWB-5 models (includes one 1-pan Insert and two 2-pan Inserts)	39396
6FB3.5	For IWB-6 models (includes three 2-pan Inserts)	46956
False Bottoms for Ice Wells (allows for 203 mm of ice and sits on bottom of well) –		
1FB8	For IWB-1 models (includes one 1-pan Insert)	₹ 9156
2FB8	For IWB-2 models (includes one 2-pan Insert)	16716
3FB8	For IWB-3 models (includes one 1-pan Insert and one 2-pan Insert)	24276
4FB8	For IWB-4 models (includes two 2-pan Insert)	31836
5FB8	For IWB-5 models (includes one 1-pan Insert and two 2-pan Inserts)	39396
6FB8	For IWB-6 models (includes three 2-pan Inserts)	46956
False Bottoms for Slim Ice Wells (allows for 89 mm of ice and sits on ledge of well) –		
1FBS3.5	For IWB-S1 models (includes one 1-pan Insert)	₹ 9156
2FBS3.5	For IWB-S2 models (includes one 2-pan Insert)	16716
3FBS3.5	For IWB-S3 models (includes one 1-pan Insert and one 2-pan Insert)	24276
4FBS3.5	For IWB-S4 models (includes two 2-pan Inserts)	31836
False Bottoms for Slim Ice Wells (allows for 203 mm of ice and sits on ledge of well) –		
1FBS8	For IWB-S1 models (includes one 1-pan Insert)	₹ 9156
2FBS8	For IWB-S2 models (includes one 2-pan Insert)	16716
3FBS8	For IWB-S3 models (includes one 1-pan Insert and one 2-pan Insert)	24276
4FBS8	For IWB-S4 models (includes two 2-pan Inserts)	31836


False Bottom Accessories

1-part, 2-part, 3-part(s)
depending on pan size

For Drop-In Ice Wells


1, 2, 3, 4, 5 or 6FB3.5

False Bottom hangs from
pan shelf - 89 mm H for ice



1, 2, 3, 4, 5 or 6FB8


False Bottom placed on bottom
of unit - 203 mm H for ice



For Drop-In Slim Ice Wells


1, 2, 3 or 4FBS3.5

False Bottom hangs from
pan shelf - 89 mm H for ice



1, 2, 3 or 4FBS8


False Bottom placed on bottom
of unit – allows for 203 mm of ice



Remote Refrigerated Drop-In Wells Ordering Instructions

Wells

Cutaway of **CWBR-6**
with accessory food pans

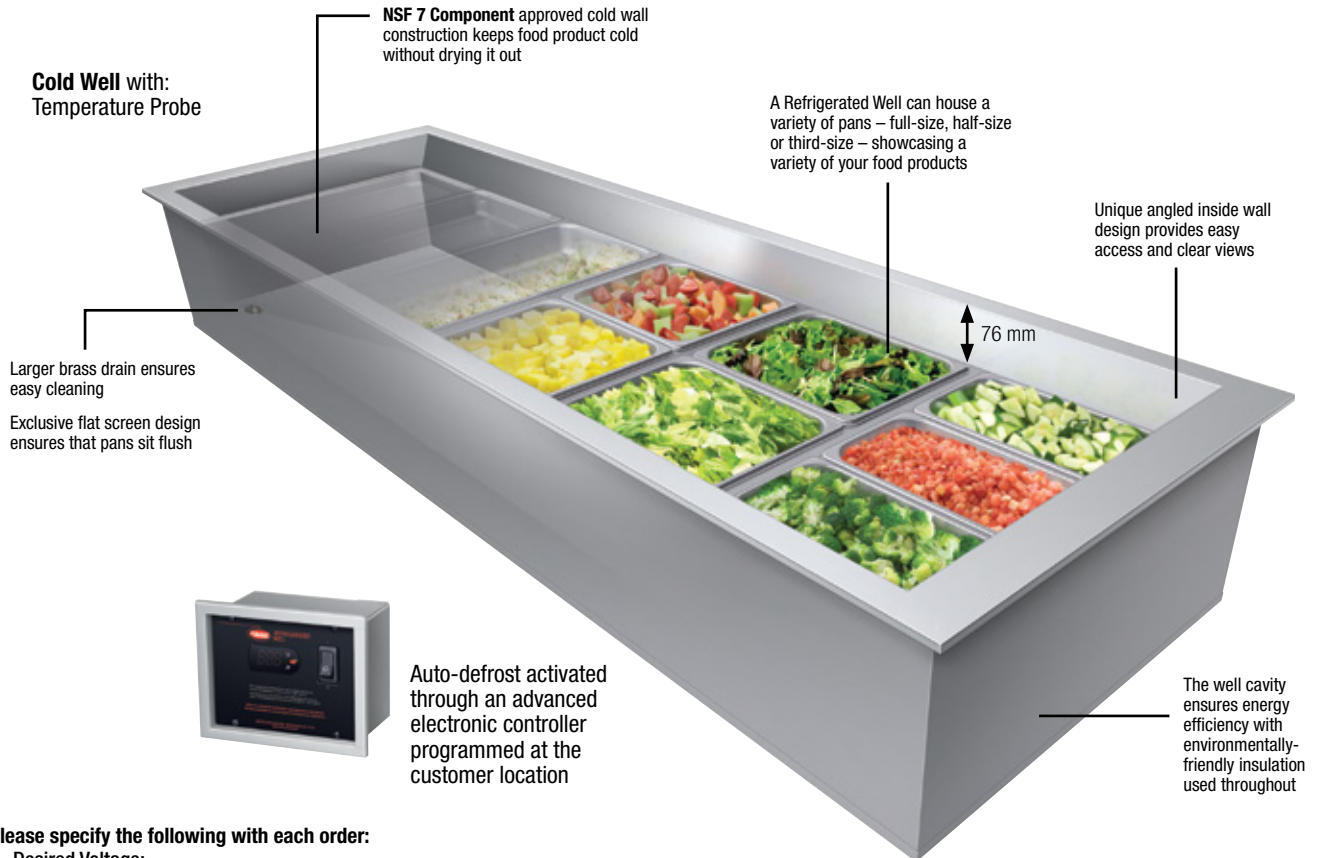

Please specify the following with each order:

- Desired Voltage:**
220-240V
- Number of Drop-In Wells Required:**
 - Standard configuration**
1-, 2-, 3-, 4-, 5-, 6-pan as rectangular, full-size (305 mm x 508 mm)
 - Slim configuration**
S1-, S2-, S3-, S4-pan as rectangular, full-size (508 mm x 305 mm)
- Depth of Model:** Standard configuration 686 mm D or Slim configuration 481 D mm
- Remote Refrigeration**
NOTE: Shipped loose: Cold Well with Temperature Probe, Control Panel (Probe Wires are 2.74 meters) and a TXV Valve
 - CWBR** with a Condensing Unit – may be field mounted up to 15 meters of tubing from the unit (shipped loose)
 - CWBR** without a Condensing Unit (Solenoid Valve attached to Cold Well)

Option

- Slant Option** for CWBR- or CWBR-1, -2, -3, -4, -5, -6 and CWBR- or CWBR-S1, -S2, -S3, -S4
- EPDM Rubber Gasket Option** for CWBR- or CWBR-1, -2, -3, -4, -5 or -6 and CWBR- or CWBR-S1, -S2, -S3, -S4

Accessories

- Pan Support Bars:** 305 mm x 508 mm
- Stainless Steel Pans:**
 - Third-size at 64 mm deep (324 W x 175 D x 64 H mm)
 - Half-size at 64 mm deep (324 W x 264 D x 64 H mm)
 - Full-size at 64 mm deep (324 W x 527 D x 64 H mm)
 - Full-size at 102 mm deep (324 W x 527 D x 102 H mm)
 - Full-size at 152 mm deep (324 W x 527 D x 152 H mm)


3. Perforated False Bottom

4. Trivets:

- Half-size
259 W x 194 D mm
- Full-size
259 W x 457 D mm

ACCESSORIES – PAGE 19

The greater surface area of the angled wall and the placement of the coils allow cold air to more effectively blanket your food product



REMOTE REFRIGERATED DROP-IN WELLS COUNTERTOP CUT-OUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
CWBR-1, CWBR-1	435 mm	457 mm	640 mm	660 mm
CWBR-2, CWBR-2	765 mm	787 mm	640 mm	660 mm
CWBR-3, CWBR-3	1095 mm	1118 mm	640 mm	660 mm
CWBR-4, CWBR-4	1426 mm	1448 mm	640 mm	660 mm
CWBR-5, CWBR-5	1756 mm	1778 mm	640 mm	660 mm
CWBR-6, CWBR-6	2086 mm	2108 mm	640 mm	660 mm
Slim Series				
CWBR-S1, CWBR-S1	641 mm	662 mm	433 mm	456 mm
CWBR-S2, CWBR-S2	1175 mm	1196 mm	433 mm	456 mm
CWBR-S3, CWBR-S3	1710 mm	1731 mm	433 mm	456 mm
CWBR-S4, CWBR-S4	2245 mm	2266 mm	433 mm	456 mm



Remote Refrigerated Drop-In Wells

Hatco's Remote Refrigerated Drop-In Wells keep pre-chilled food products at safe-serving temperatures but in a remote configuration that offers unlimited flexibility for your own particular dining design needs.

- Full-size, insulated wells available in 1- to 6-pan configurations
- NSF 7 Component approved cold wall construction keeps food cold without drying it out
- Optimal insulation on sides and bottom to ensure better cold retention. Environmentally-friendly insulation used throughout

- CWBR models include a condensing unit (shipped loose, can be field mounted up to 15 meters of tubing from unit) and control panel (shipped loose - probe wires are 2.74 meters) for installing in more convenient or desirable locations
- CWBX model include a control panel (shipped loose - probe wires are 2.74 meters) but without a condensing unit for the increased flexibility of multiple cold well configurations
- Auto-defrost is activated through an advanced electronic controller programmed at the customer location
- 1" NPSM brass drain simplifies cleaning

REMOTE REFRIGERATED DROP-IN FULL-SIZE WELLS – WITH CONDENSING UNIT AND REMOTE CONTROL PANEL

Model	Dimensions (W x D x H)	List Price
CWBR-1	483 x 686 x 305 mm	598668
CWBR-2	813 x 686 x 305 mm	640080
CWBR-3	1143 x 686 x 305 mm	689472
CWBR-4	1473 x 686 x 305 mm	741972
CWBR-5	1803 x 686 x 305 mm	807576
CWBR-6	2134 x 686 x 305 mm	859320

CE Mark not available.

All Remote Refrigerated Drop-In Well Models with Condensing Unit and Remote Control Panel Feature:

Voltage: 220-240V, single phase.

Models Shipped with: Electronic temperature control, condensing unit and TXV valve (all shipped loose).

Consult Factory for: HP, watts, shipping and refrigerant specifications.

REMOTE REFRIGERATED DROP-IN FULL-SIZE WELLS – WITH REMOTE CONTROL PANEL

Model	Dimensions (W x D x H)	List Price
CWBX-1	483 x 686 x 433 mm	₹464436
CWBX-2	813 x 686 x 433 mm	505848
CWBX-3	1143 x 686 x 433 mm	555240
CWBX-4	1473 x 686 x 433 mm	607740
CWBX-5	1803 x 686 x 433 mm	673344
CWBX-6	2134 x 686 x 433 mm	725088

CE Mark not available.

All Remote Refrigerated Drop-In Well Models with Remote Control Panel Feature:

Voltage: 220, 230, 240V, single phase.

Models Shipped with: Electronic temperature control, TXV valve (shipped loose) and a solenoid valve attached to well.

Consult Factory for: HP, watts, shipping and refrigerant specifications.

Control panel and a condensing unit (shipped loose)



CWBR-6 with accessory food pans and pan support bars

Control panel (shipped loose)



CWBX-6 with accessory food pans and pan support bars

OPTIONS (available at time of purchase only)


Slant Options –

CWBR-1SLANT	Slant Option for CWBR-1, CWBX-1	₹24192
CWBR-2SLANT	Slant Option for CWBR-2, CWBX-2	26040
CWBR-3SLANT	Slant Option for CWBR-3, CWBX-3	27972
CWBR-4SLANT	Slant Option for CWBR-4, CWBX-4	29820
CWBR-5SLANT	Slant Option for CWBR-5, CWBX-5	31752
CWBR-6SLANT	Slant Option for CWBR-6, CWBX-6	33600

Gasket Options –


BEZELGASKET-1	Factory installed for CWBR-1, CWBX-1	₹ 7812
BEZELGASKET-2	Factory installed for CWBR-2, CWBX-2	7812
BEZELGASKET-3	Factory installed for CWBR-3, CWBX-3	10248
BEZELGASKET-4	Factory installed for CWBR-4, CWBX-4	10248
BEZELGASKET-5	Factory installed for CWBR-5, CWBX-5	11004
BEZELGASKET-6	Factory installed for CWBR-6, CWBX-6	11004

CWBX-2 with slant option CWBR-2SLANT




BEZELGASKET-1

Factory installed EPDM rubber gasket option (eliminates the need for silicone or other sealants)



COUNTERTOP CUT-OUT DIMENSIONS – PAGE 16 ACCESSORIES – PAGE 19



Remote Refrigerated Slim Drop-In Wells

Hatco's Remote Refrigerated Slim Drop-In Well is a full-size unit that blankets your pre-chilled food product to retain optimum freshness and taste in one efficient and easy operation – but placed lengthwise and in two remote configurations. This provides customers with a complete cold well within easy reach, regardless of the sneeze guards and unlimited flexibility for your design needs.

- Full-size, Insulated wells available in 1 to 4 full-size pan configurations
- NSF 7 Component approved cold wall construction (CWBR-S only), keeps food product cold without drying it out
- Optimal insulation on sides and bottom to ensure better cold retention. Environmentally-friendly insulation used throughout
- CWBR-S models include a condensing unit (shipped loose, can be field mounted up to 15.24 meters of tubing from unit) and control panel (shipped loose - probe wires are 2.74 meters) for installing in more convenient or desirable locations
- CWBX-S model include a control panel (shipped loose - probe wires are 2.74 meters) but without a condensing unit for the increased flexibility of multiple cold well configurations
- Easy serviceability with a sight glass, service valves, dryer and a receiver (CWBR-S models only)
- Auto-defrost is activated through an advanced electronic controller programmed at customer location
- Optimal insulation on sides and bottom ensure better cold retention
- 1" NPSM brass drain simplifies cleaning



Control panel (shipped loose)

CWBR-S4 with accessory (hotel) food pans and additional support bars



Condensing unit (shipped loose)



Control panel (Shipped loose)

CWBX-S2 with accessory (hotel) food pans and additional support bars

REMOTE REFRIGERATED SLIM DROP-IN FULL-SIZE WELLS – WITH CONDENSING UNIT AND REMOTE CONTROL PANEL

Model	Dimensions (W x D x H)	List Price
CWBR-S1	687 x 481 x 305 mm	₹598668
CWBR-S2	1222 x 481 x 305 mm	659904
CWBR-S3	1757 x 481 x 305 mm	767340
CWBR-S4	2292 x 481 x 305 mm	931476

All Remote Refrigerated Slim Drop-In Well Models with Condensing Unit and Remote Control Panel Feature:

Voltage: 220/230/240V, single phase.

Models Shipped with: Electronic temperature control, condensing unit and TXV valve (all shipped loose).

Consult Factory for: HP, watts, shipping and refrigerant specifications.

REMOTE REFRIGERATED SLIM DROP-IN FULL-SIZE WELLS – WITH REMOTE CONTROL PANEL

Model	Dimensions (W x D x H)	List Price
CWBX-S1	687 x 481 x 435 mm	₹464436
CWBX-S2	1222 x 481 x 435 mm	505848
CWBX-S3	1757 x 481 x 435 mm	555240
CWBX-S4	2292 x 481 x 435 mm	607740

All Remote Refrigerated Slim Drop-In Well Models with Remote Control Panel Feature:

Voltage: 220/230/240V, single phase

Models Shipped with: Electronic temperature control, TXV valve (all shipped loose) and a soleoid valve attached to the well.

Consult Factory for: HP, watts, shipping and refrigerant specifications.


OPTIONS (available at time of purchase only)

Slant Options –


CWB-S1SLANT	Slant Option for CWBR-S1, CWBX-S1	₹26712
CWB-S2SLANT	Slant Option for CWBR-S2, CWBX-S2	28560
CWB-S3SLANT	Slant Option for CWBR-S3, CWBX-S3	30492
CWB-S4SLANT	Slant Option for CWBR-S4, CWBX-S4	32340

Gasket Options –

BEZELGASKET-S1	Factory installed for CWBR-S1, CWBX-S1	₹ 7812
BEZELGASKET-S2	Factory installed for CWBR-S2, CWBX-S2	7812
BEZELGASKET-S3	Factory installed for CWBR-S3, CWBX-S3	10248
BEZELGASKET-S4	Factory installed for CWBR-S4, CWBX-S4	10248

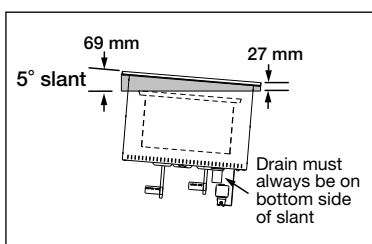


Slant Option for CWBR-S1, CWBX-S1, CWBR-S2, CWBX-S2, CWBR-S3, CWBX-S3, CWBR-S4, CWBX-S4




BEZELGASKET-S1

Factory installed EPDM rubber gasket option (eliminates the need for silicone or other sealants)



COUNTERTOP CUT-OUT DIMENSIONS – PAGE 16 ACCESSORIES – PAGE 19



Refrigerated Drop-In Well Accessories *(available for purchase at any time)*



CWBR-2 with optional **CWBR-2SLANT** and accessory food pans and pan support bars

Wells

PANS – TRIVETS *(available for purchase at any time)*

ST PAN 1/3	Third-Size Stainless Steel Pan – 324 W x 175 D x 64 H mm	₹ 5712
ST PAN 1/2	Half-Size Stainless Steel Pan – 324 W x 264 D x 64 H mm	6552
ST PAN 2	Full-Size Stainless Steel Pan – 324 W x 527 D x 64 H mm	7812
ST PAN 4	Full-Size Stainless Steel Pan – 324 W x 527 D x 102 H mm	9828
HDW 6" PAN	Full-Size Stainless Steel Pan – 324 W x 527 D x 152 H mm	10668
Wire Trivets Stainless –		
TRIVET (1/2)SS	Half-Size – 259 W x 194 D mm	₹10584
TRIVET SS	Full-Size – 259 W x 457 D mm	14700

ST PAN 1/3
ST PAN 1/2
ST PAN 2




HDW 6" PAN



ST PAN 4

TRIVET
(1/2)SS



TRIVET SS

SUPPORT BARS – FALSE BOTTOMS *(available for purchase at any time)*

CWB12BAR	305 mm Pan Support Bar for Drop-In Ice or Refrigerated Wells	₹2016
CWB20BAR	508 mm Pan Support Bar for Drop-In Ice or Refrigerated Wells	2352

False Bottom for Drop-In Refrigerated Wells (Perforated False Bottom Accessory, choose your appropriate pan size) –


CWB-1FB	For CWBR-1, CWBX-1 (1-Part Accessory)	₹ 9156
CWB-2FB	For CWBR-2, CWBX-2 (1-Part Accessory)	16716
CWB-3FB	For CWBR-3, CWBX-3 (2-Part Accessory)	24276
CWB-4FB	For CWBR-4, CWBX-4 (2-Part Accessory)	31836
CWB-5FB	For CWBR-5, CWBX-5 (3-Part Accessory)	39396
CWB-6FB	For CWBR-6, CWBX-6 (3-Part Accessory)	46956

False Bottom for Slim Refrigerated Wells (choose your appropriate pan size) –

1FBS8	For CWBR-S1, CWBX-S1 (1-Part Accessory)	₹ 9156
2FBS8	For CWBR-S2, CWBX-S2 (1-Part Accessory)	16716
3FBS8	For CWBR-S3, CWBX-S3 (2-Part Accessory)	24276
4FBS8	For CWBR-S4, CWBX-S4 (2-Part Accessory)	31836

Support Bars


Choose the appropriate kit for IWB or CWB series

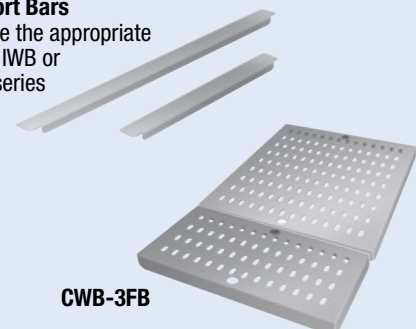

CWB-3FB


False Bottom Accessories
1-part, 2- or 3-part(s)
depending on pan size

(CWB-1, -2, -3, -4, -5 or -6FB)
for the CWBR or CWBX series




(1, 2, 3, or 4FBS8)
for the CWBR-S or CWBX-S series

False Bottom placed on bottom of unit – allows for 203 mm of ice



Remote Drop-In Frost Tops Ordering Instructions

Cutaway of **FTBR-3**
with accessory sheet pans

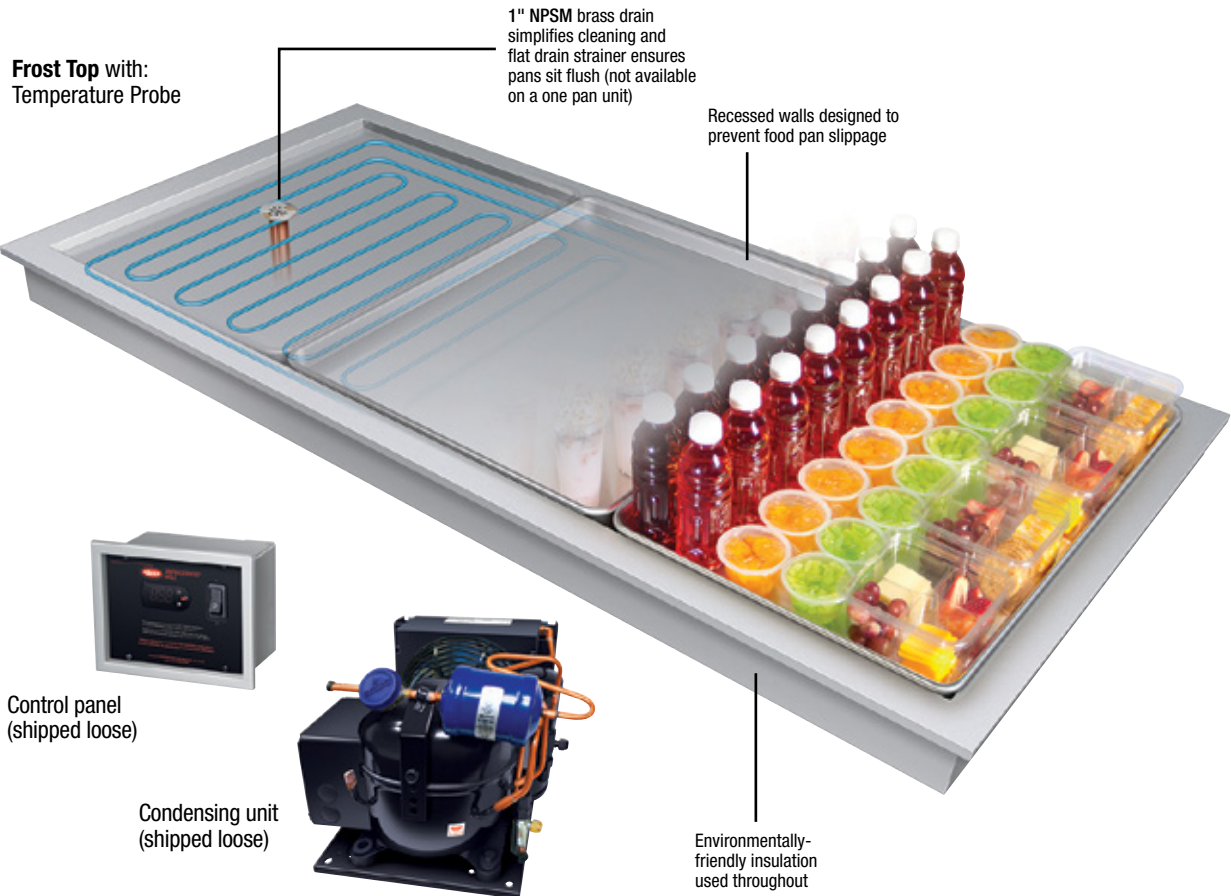

Please specify the following with each order:

- Desired Voltage:**
220-240V
- Number of Full-Size Sheet Pans Accommodated:**
1-, 2- or 3-pan as rectangular sheet pans with a Slim or Standard configuration
- Depth of Model:** Standard configuration (735 mm D) or Slim configuration (535 mm D)
- Remote Refrigeration**
Note: Shipped loose: Frost Top, Control Panel (Probe Wires are 2.74 meters) and a TXV Valve
A. FTBR with a Condensing Unit –
may be field mounted up to 15.24 meters of tubing (shipped loose)
B. FTBX without a Condensing Unit
(Solenoid Valve attached to Frost Top)

Accessories

- Pans –**
A. Half-size sheet pan
457 W x 330 D mm
B. Full-size sheet pan
457 W x 660 D mm

NSF 7 Component approved cold wall construction keeps food product cold without drying it out

REMOTE DROP-IN FROST TOP COUNTERTOP CUT-OUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
FTBR-1, FTBX-1	697 mm	711 mm	494 mm	511 mm
FTBR-2, FTBX-2	949 mm	965 mm	694 mm	711 mm
FTBR-3, FTBX-3	1407 mm	1422 mm	694 mm	711 mm
FTBR-S2, FTBX-S2	1354 mm	1372 mm	494 mm	511 mm
FTBR-S3, FTBX-S3	2011 mm	2029 mm	494 mm	511 mm



Remote Drop-In Frost Tops

Keeping pre-chilled beverages, snacks, hors d'oeuvres and side dishes cool and ready-to-serve, the Hatco Remote Drop-In Frost Tops offer additional flexibility with remote configurations. Also available in a slim configuration, providing wider access to your customer.

- Accommodates full-size sheet pans
- Additionally the FTBR-, FTBX-2 and -3 models include a standard 1" NPSM brass drain
- FTBR models include a condensing unit (shipped loose, can be field mounted up to 15.24 meters of tubing from unit) and a control panel (shipped loose - probe wires are 2.74 meters) for installing in more convenient or desirable locations
- FTBX models include a control panel (shipped loose - probe wires are 2.74 meters) but shipped without a condensing unit for the increased flexibility of multiple Frost Top configurations
- Easy serviceability with a sight glass,

service valves, dryer and receiver (FTBR models only)


- Auto-defrost is activated through an advanced electronic controller programmed at the customer location (FTBR models only)
- Optimal insulation on sides and bottom to ensure better cold retention and built with one of the most efficient condensing units on the market

FTBR-S2

with accessory sheet pans


Frost Top with a temperature probe,

control panel and a condensing unit (both shipped loose)

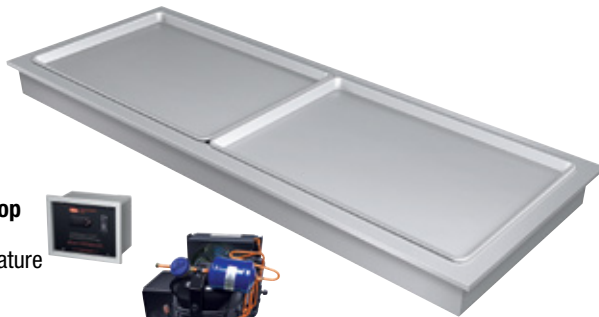

Control panel (shipped loose)

FTBX-1 (shipped without condensing unit)

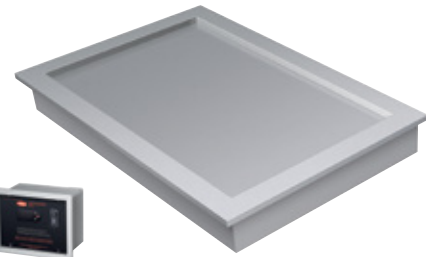

REMOTE DROP-IN FROST TOPS – WITH CONDENSING UNIT AND CONTROL PANEL

Model	Dimensions W x D x H	List Price
FTBR-1	735 x 535 x 90 mm	₹612612
FTBR-2	991 x 735 x 90 mm	686784
FTBR-3	1448 x 735 x 90 mm	770028
Slim		
FTBR-S2	1395 x 535 x 90 mm	₹694260
FTBR-S3	2053 x 535 x 90 mm	783048

All Remote Drop-In Frost Top Models with Condensing Unit and Remote Control Panel Feature:

Voltage: 220-240V, single phase.

Models Shipped with: Electronic temperature control, condensing unit and TXV valve (all shipped loose).

Consult Factory for: HP and refrigerant specifications.

REMOTE DROP-IN FROST TOPS – WITH CONTROL PANEL

Model	Dimensions W x D x H	List Price
FTBX-1	735 x 535 x 218 mm	₹478380
FTBX-2	991 x 735 x 218 mm	552552
FTBX-3	1448 x 735 x 218 mm	635796
Slim		
FTBX-S2	1395 x 535 x 218 mm	₹560028
FTBX-S3	2053 x 535 x 218 mm	648816

All Remote Drop-In Frost Top Models Feature with Remote Control Panel Feature:

Voltage: 220-240V, single phase


Models Shipped with: Electronic temperature control, TXV valve (shipped loose) and a solenoid valve attached to bottom of unit.

Consult Factory for: HP and refrigerant specifications.

ACCESSORIES (available for purchase at any time)

ALUM PAN	Half-Size Sheet Pan – 457 W x 330 D mm	₹3108
18" SHEET PAN	Full-Size Sheet Pan – 457 W x 660 D mm	4368


COUNTERTOP CUT-OUT DIMENSIONS – PAGE 20



Modular/Ganged Heated Wells (Full and 4/3-Size) Ordering Instructions

Wells

Cutaway of **HWBI-5MA** with accessory food pans and optional split control boxes

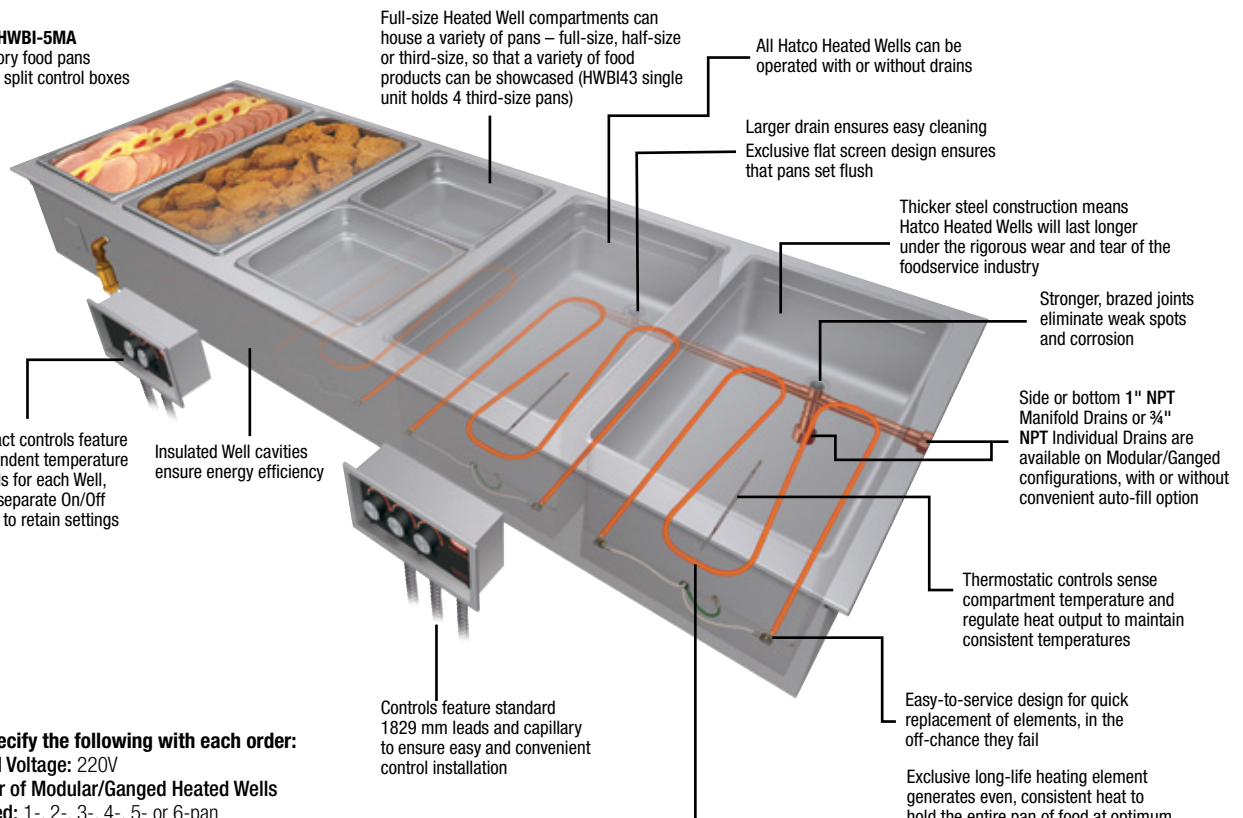

Please specify the following with each order:

- Desired Voltage:** 220V
- Number of Modular/Ganged Heated Wells**
Required: 1-, 2-, 3-, 4-, 5- or 6-pan
NOTE: Modular/Ganged units are only offered as rectangular, full-size (305 x 508 mm) or as 4/3-size wells (305 x 686 mm)
- Drain** (with or without - choose drain below):
A. Standard Individual Well 3/4" NPT Drain
B. Manifold 1" NPT Drain with side drain, field selectable left or right side (available on -2, -3, -4, -5, -6 models only)
C. Manifold 1" NPT Drain with bottom drain, field selectable left or right well (available on -2, -3, -4, -5, -6 models only)
- Auto-fill** (with or without) All autofill units require a 1/4" NPT water connection
- Bezel** allows a 686 mm depth for Modular units to match Hatco HWBI models in a countertop display (not available for HWBI43 Series)
- Control:**
A. Single Control Box (standard on all units)
B. Split Control Boxes (optional on 4-, 5-, 6-pan units and must be specified at order, not available on 1-, 2-, 3-Pan units)

Accessories for Modular/Ganged Heated Wells

- Pan Support Bars:**
A. Standard or Slim configuration 305 or 508 mm
B. 4/3-size configuration 305 mm
- Adapters:** to convert Modular/Ganged units to hold round pans:
A. Standard or Slim configuration 4- to 7-liter round pans
B. 4/3-size configuration 10-liter round pans
- Stainless Steel Pans:**
A. Third-size at 64 mm high (324 W x 175 D x 64 H mm)
B. Half-size at 64 mm high (324 W x 264 D x 64 H mm)
C. Full-size at 64 mm high (324 W x 527 D x 64 H mm)
D. Full-size at 102 mm high (324 W x 527 D x 102 H mm)
E. Full-size at 152 mm high (324 W x 527 D x 152 H mm)
- Valves:**
1" or 3/4" NPT Ball Valve
1" or 3/4" NPT Gate Valve
- Heated Well Covers** to convert Modular/Ganged units to heated shelves (not available for HWBI43 Series):
A. 1-Pan Heated Well Cover
B. 2-Pan Heated Well Cover

ACCESSORIES - PAGES 27, 35-36

DROP-IN MODULAR/GANGED HEATED WELLS COUNTERTOP CUTOUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
HWBI-1 Series	359 mm	368 mm	565 mm	575 mm
HWBI-2 Series	715 mm	724 mm	565 mm	575 mm
HWBI-3 Series	1070 mm	1080 mm	565 mm	575 mm
HWBI-4 Series	1426 mm	1435 mm	565 mm	575 mm
HWBI-5 Series	1781 mm	1791 mm	565 mm	575 mm
HWBI-6 Series	2137 mm	2146 mm	565 mm	575 mm

DROP-IN MODULAR/GANGED 4/3-SIZE HEATED WELLS COUNTERTOP CUTOUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
HWBI43-1 Series	361 mm	367 mm	740 mm	746 mm
HWBI43-2 Series	716 mm	721 mm	740 mm	746 mm
HWBI43-3 Series	1072 mm	1077 mm	740 mm	746 mm
HWBI43-4 Series	1428 mm	1432 mm	740 mm	746 mm
HWBI43-5 Series	1783 mm	1788 mm	740 mm	746 mm
HWBI43-6 Series	2139 mm	2143 mm	740 mm	746 mm

Modular/Ganged Heated Wells

Hatco Modular/Ganged Heated Wells are full-size units that are grouped together in a modular fashion to provide customers with a complete steam table contained within one piece of equipment for a clean, integrated look. Select the configuration that's right for your foodservice operation.

- Full-size, insulated Wells available in 1- to 6-Modular/Ganged units
- Individual thermostatic controls for each well provide the ultimate in temperature regulation
- 1829 mm conduit is standard for convenient placement of controls
- Wells empty quickly and easily with a manifold drain option

- Auto-fill option to automatically fill and replenish water without user maintenance and intervention
- Separate well assemblies with independent access to each one for easy service



HWBI-5MA with standard single control box and accessory food pans

DROP-IN MODULAR/GANGED SIZE RECTANGULAR WELLS – INSULATED – TOP MOUNT

Model	Voltage	Dimensions W x D x H	Watts	Approx. Ship Weight	List Price
HWBI-1	220	394 x 600 x 243 mm	1215	15 kg	₹127764
HWBI-1D	220	394 x 600 x 243 mm	1215	17 kg	137508
HWBI-1DA	220	394 x 600 x 243 mm	1215	17 kg	194376
HWBI-2	220	749 x 600 x 243 mm	2415	33 kg	270144
HWBI-2D	220	749 x 600 x 243 mm	2415	35 kg	284088
HWBI-2DA*	220	749 x 600 x 243 mm	2415	40 kg	339528
HWBI-2M	220	749 x 600 x 243 mm	2415	34 kg	290556
HWBI-2MA	220	749 x 600 x 243 mm	2415	39 kg	364476
HWBI-3	220	1105 x 600 x 243 mm	3615	47 kg	337008
HWBI-3D	220	1105 x 600 x 243 mm	3615	52 kg	362208
HWBI-3DA*	220	1105 x 600 x 243 mm	3615	52 kg	389508
HWBI-3M	220	1105 x 600 x 243 mm	3615	49 kg	385140
HWBI-3MA	220	1105 x 600 x 243 mm	3615	51 kg	459060
HWBI-4	220	1461 x 600 x 243 mm	4815	60 kg	437136
HWBI-4D	220	1461 x 600 x 243 mm	4815	62 kg	482496
HWBI-4DA*	220	1461 x 600 x 243 mm	4815	60 kg	537852
HWBI-4M	220	1461 x 600 x 243 mm	4815	63 kg	520800
HWBI-4MA	220	1461 x 600 x 243 mm	4815	63 kg	594804
HWBI-5	220	1816 x 600 x 243 mm	6015	76 kg	524076
HWBI-5D	220	1816 x 600 x 243 mm	6015	76 kg	600684
HWBI-5DA*	220	1816 x 600 x 243 mm	6015	76 kg	657468
HWBI-5M	220	1816 x 600 x 243 mm	6015	76 kg	650916
HWBI-5MA	220	1816 x 600 x 243 mm	6015	84 kg	722988
HWBI-6	220	2172 x 600 x 243 mm	7215	86 kg	678888
HWBI-6D	220	2172 x 600 x 243 mm	7215	86 kg	739788
HWBI-6DA*	220	2172 x 600 x 243 mm	7215	88 kg	792708
HWBI-6M	220	2172 x 600 x 243 mm	7215	86 kg	808584
HWBI-6MA	220	2172 x 600 x 243 mm	7215	89 kg	878808

* Auto-fill located on left control only and fills left-hand well. To fill all wells, drains must be connected with external manifold by installer.

All Drop-In Modular/Ganged Rectangular Heated Well Models Feature:

Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation and remote thermostats with flexible 1829 mm conduits and lighted power switches.

Modular/Ganged Heated Wells Controls*

1 PAN	SINGLE CONFIGURATION	
2 PAN	SINGLE CONFIGURATION	
3 PAN	SINGLE CONFIGURATION	
4 PAN	SINGLE CONFIGURATION	
4 PAN	SPLIT CONFIGURATION	
5 PAN	SINGLE CONFIGURATION	
5 PAN	SPLIT CONFIGURATION	
6 PAN	SINGLE CONFIGURATION	
6 PAN	SPLIT CONFIGURATION	

* 4-, 5-, 6-Pan Units: Single control boxes are standard. If optional split control boxes are desired, it must be specified at order.


OPTIONS (available at time of purchase only)

HWBI-SIDE	Copper Manifold Drain with side exit (not available on HWBI-1)	No Charge
HWB-BOTTOM	Copper Manifold Drain with bottom exit (not available on HWBI-1)	No Charge
OS-BEZEL	686 mm depth Bezel for Modular unit to match Hatco CWBX in a countertop display	No Charge
COND-3	914 mm Flexible Conduit (1829 mm standard) available on split control only	No Charge




Gasket Options –

BEZELGASKET-1	Factory installed for HWBI-1	₹ 7812
BEZELGASKET-2	Factory installed for HWBI-2	7812
BEZELGASKET-3	Factory installed for HWBI-3	10248
BEZELGASKET-4	Factory installed for HWBI-4	10248
BEZELGASKET-5	Factory installed for HWBI-5	11004
BEZELGASKET-6	Factory installed for HWBI-6	11004

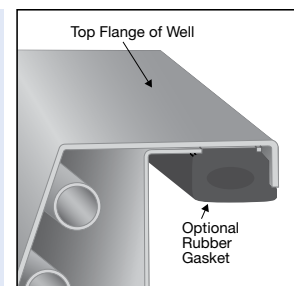

BEZELGASKET-1
Factory-installed option (eliminates the need for silicone or other sealants)



COUNTERTOP CUTOUT DIMENSIONS – PAGE 22
ACCESSORIES – PAGES 27, 35-36

Drop-In Modular/ Ganged 4/3-Size Heated Wells

Hatco Modular/Ganged 4/3-Size Heated Wells maintain hot food at safe serving temperatures, with better quality construction, longer holding times and more accurate temperatures. A deeper single unit can hold the equivalent of 4 third-size pans. They are also grouped together in a ganged

fashion to provide customers with a complete steam table contained within one piece of equipment. This means easy installation with a clean integrated look for your steam table.

Choose the number of wells, from 1 to 6 unit configurations, as well as voltage, auto-fill, controls and drain options. Each well has its own individual control to regulate the temperature of each food offering.

- Longer holding times with more accurate temperatures
- Separate lighted On/Off rocker switch and temperature dial for easy operation
- 50% larger drain with flat screen simplifies cleaning and holds pans level
- Unique design allows quick change of element or thermostat if needed
- EZ locking hardware for quick installation
- Stainless steel construction and solid brazed drain fitting joints for durability
- A 1829 mm conduit is included for convenient placement of controls

DROP-IN MODULAR/GANGED 4/3-SIZE RECTANGULAR WELLS – INSULATED – TOP MOUNT

Model	Dimensions W x D x H	Voltage	Watts	Approx. Ship Weight	List Price
HWBI43-1	394 x 772 x 244 mm	220	1215	19 kg	₹180096
HWBI43-1D	394 x 772 x 244 mm	220	1215	19 kg	185388
HWBI43-1DA	394 x 772 x 244 mm	220	1215	21 kg	252000
HWBI43-2	749 x 772 x 244 mm	220	2415	40 kg	300384
HWBI43-2D	749 x 772 x 244 mm	220	2415	44 kg	311472
HWBI43-2DA*	749 x 772 x 244 mm	220	2415	43 kg	380604
HWBI43-2M	749 x 772 x 244 mm	220	2415	37 kg	341628
HWBI43-2MA	749 x 772 x 244 mm	220	2415	45 kg	410844
HWBI43-3	1105 x 772 x 244 mm	220	3615	52 kg	410172
HWBI43-3D	1105 x 772 x 244 mm	220	3615	51 kg	426468
HWBI43-3DA*	1105 x 772 x 244 mm	220	3615	56 kg	493584
HWBI43-3M	1105 x 772 x 244 mm	220	3615	61 kg	460992
HWBI43-3MA	1105 x 772 x 244 mm	220	3615	61 kg	528360
HWBI43-4	1461 x 772 x 244 mm	220	4815	75 kg	540372
HWBI43-4D	1461 x 772 x 244 mm	220	4815	69 kg	562128
HWBI43-4DA*	1461 x 772 x 244 mm	220	4815	68 kg	629412
HWBI43-4M	1461 x 772 x 244 mm	220	4815	70 kg	601104
HWBI43-4MA	1461 x 772 x 244 mm	220	4815	82 kg	668388
HWBI43-5	1816 x 772 x 244 mm	220	6015	85 kg	658392
HWBI43-5D	1816 x 772 x 244 mm	220	6015	84 kg	686532
HWBI43-5DA*	1816 x 772 x 244 mm	220	6015	85 kg	755832
HWBI43-5M	1816 x 772 x 244 mm	220	6015	84 kg	731052
HWBI43-5MA	1816 x 772 x 244 mm	220	6015	92 kg	800352
HWBI43-6	2172 x 772 x 244 mm	220	7215	97 kg	786240
HWBI43-6D	2172 x 772 x 244 mm	220	7215	97 kg	821940
HWBI43-6DA*	2172 x 772 x 244 mm	220	7215	98 kg	894264
HWBI43-6M	2172 x 772 x 244 mm	220	7215	97 kg	879564
HWBI43-6MA	2172 x 772 x 244 mm	220	7215	113 kg	951300

* Auto-fill located on left control only and fills left-hand well.

To fill all wells, drains must be connected with external manifold by installer.

All Drop-In Modular/Ganged 4/3-Size Rectangular Heated Well Models Feature:

Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation and remote thermostats with flexible 1829 mm conduits and lighted power switches.

OPTIONS (available at time of purchase only)

HWBI-SIDE	Copper Manifold Drain with side exit (not available on HWBI43-1)	No Charge
HWBI-BOTTOM	Copper Manifold Drain with bottom exit (not available on HWBI43-1)	No Charge
COND-3	914 mm Flexible Conduit (1829 mm standard) available on split control only	No Charge



Gasket Options –

BEZELGASKET-1	Factory installed for HWBI43-1	₹ 7812
BEZELGASKET-2	Factory installed for HWBI43-2	7812
BEZELGASKET-3	Factory installed for HWBI43-3	10248
BEZELGASKET-4	Factory installed for HWBI43-4	10248
BEZELGASKET-5	Factory installed for HWBI43-5	11004
BEZELGASKET-6	Factory installed for HWBI43-6	11004

HWBI43-3DA with
- 4 third-size pans,
- 2 half-size pans and 1 third-size pan
- 1 full-size pan and 1 third-size pan



Modular/Ganged Heated Wells Controls*

1 PAN	SINGLE CONFIGURATION	
2 PAN	SINGLE CONFIGURATION	
3 PAN	SINGLE CONFIGURATION	
4 PAN	SINGLE CONFIGURATION	
4 PAN	SPLIT CONFIGURATION	
5 PAN	SINGLE CONFIGURATION	
5 PAN	SPLIT CONFIGURATION	
6 PAN	SINGLE CONFIGURATION	
6 PAN	SPLIT CONFIGURATION	

*4-, 5-, 6-pan units: Single control box is standard. If optional split control boxes are desired, it must be specified at order.


HWBI43 - x x A

Heated Well Built-In	No Character = No Auto-Fill
I = Insulated Top Mount	A = Auto-Fill Equipped
No Character = Standard Well, Full-Size Pan	No Character = No Drain
43 = Extended Well, 4 Third-Size Pans	D = Individual Drain Equipped
Quantity of Wells	M = Manifold Drain Equipped

COUNTERTOP CUTOUT DIMENSIONS – PAGE 22
ACCESSORIES – PAGES 27, 35-36

Modular/Ganged Slim Heated Wells Ordering Instructions

Cutaway of **HWBI-S4MA**
with accessory food pans and
optional split control boxes

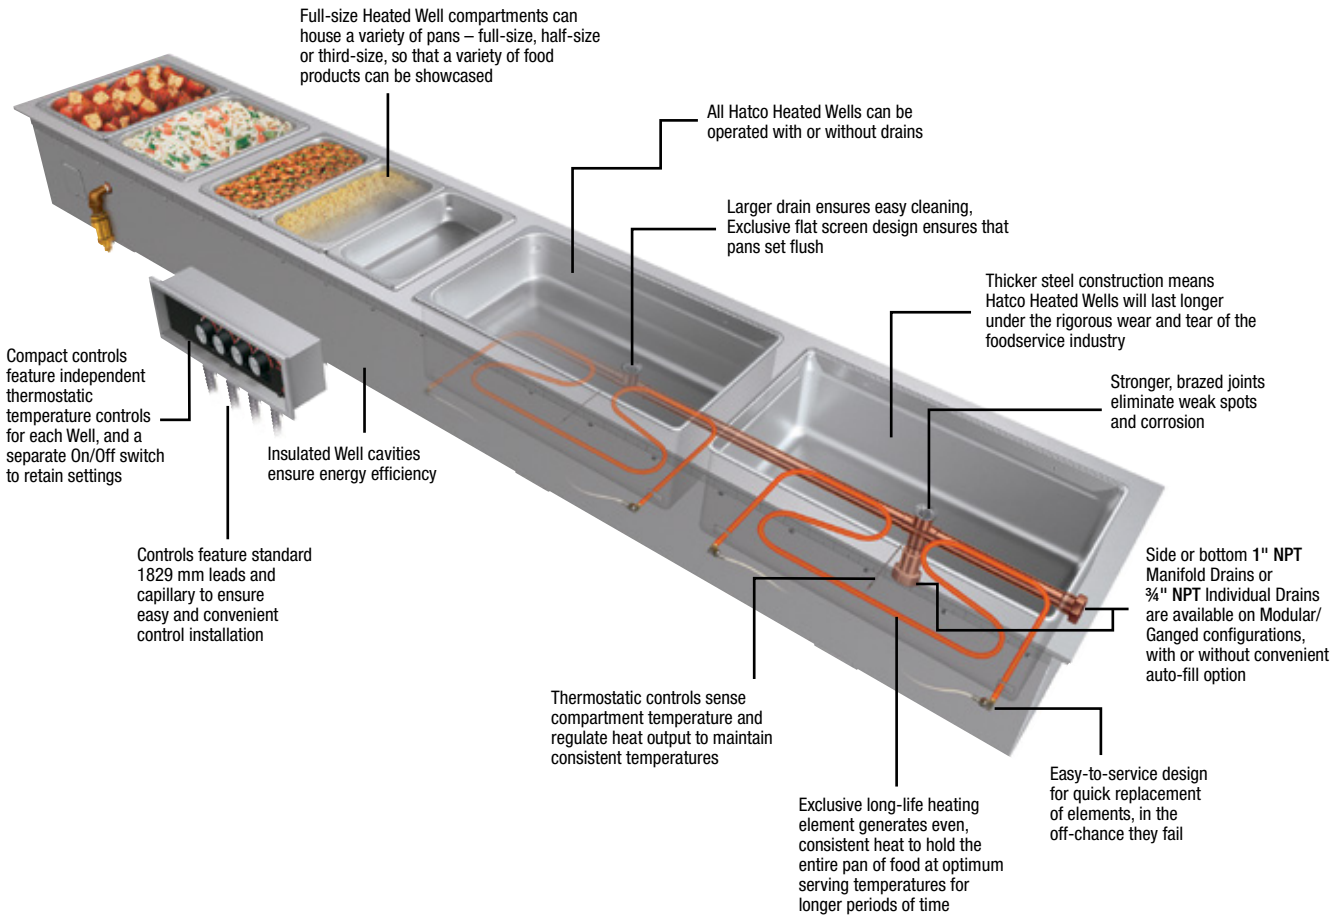

Please specify the following with each order:

- Desired Voltage:** 220V
- Number of Slim Modular/Ganged Heated Wells**
Required: 2-, 3-, 4-Pan
NOTE: Slim Modular/Ganged units are only offered as rectangular, full-size (305 x 508 mm), but placed lengthwise
- Drain** (with or without – choose drain below):
A. Standard Individual Well 3/4" NPT Drain
B. Manifold 1" NPT Drain with side drain, field selectable left or right side
C. Manifold 1" NPT Drain with bottom drain, field selectable left or right well
- Auto-fill** (with or without) All autofill units require a 1/4" NPT water connection
- Bezel** allows a 481 mm depth for modular units to match Hatco Refrigerated Slim Drop-In models in a countertop display
- Control:**
A. Single Control Box (standard on all units)
B. Split Control Boxes (optional on 4-pan units and specified at order)

Accessories for Slim Modular/Ganged Heated Wells

- Pan Support Bars:** 305 mm or 508 mm
- Adapters** to convert Slim Modular/Ganged units to hold 4- or 7-liter round pans
- Stainless Steel Pans:**
A. Third-size at 64 mm high (324 W x 175 D x 64 H mm)
B. Half-size at 64 mm high (324 W x 264 D x 64 H mm)
C. Full-size at 64 mm high (324 W x 527 D x 64 H mm)
D. Full-size at 102 mm high (324 W x 527 D x 102 H mm)
E. Full-size at 152 mm high (324 W x 527 D x 152 H mm)
- Valves:**
1" or 3/4" NPT Ball Valve
1" or 3/4" NPT Gate Valve
- Heated Well Covers** to convert Modular/Ganged

Slim units to heated shelves Combine the number of heated well covers for your appropriate pan size)::
A. 1-Pan Heated Well Cover

ACCESSORIES – PAGES 27, 35-36


DROP-IN MODULAR/GANGED SLIM HEATED WELLS COUNTERTOP CUTOUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
HWBI-S2	1121 mm	1127 mm	362 mm	368 mm
HWBI-S3	1680 mm	1686 mm	362 mm	368 mm
HWBI-S4	2239 mm	2244 mm	362 mm	368 mm

Modular/Ganged Slim Heated Wells

Hatco Modular/Ganged Slim Heated Wells are full-sized units that are grouped together in a modular fashion but placed lengthwise. This provides customers with a complete steam table within easy reach, regardless of the sneeze guards. Select the configuration that's right for your foodservice operation.

- Full-size, insulated wells available in 2- to 4-modular/ganged units
- Individual thermostatic controls for each Well provide the ultimate in temperature regulation
- 1829 mm conduit is standard for convenient placement of controls
- Wells empty quickly and easily with a manifold drain option
- Auto-fill option to automatically fill and replenish water without user maintenance and intervention
- Separate well assemblies with independent access to each one for easy service

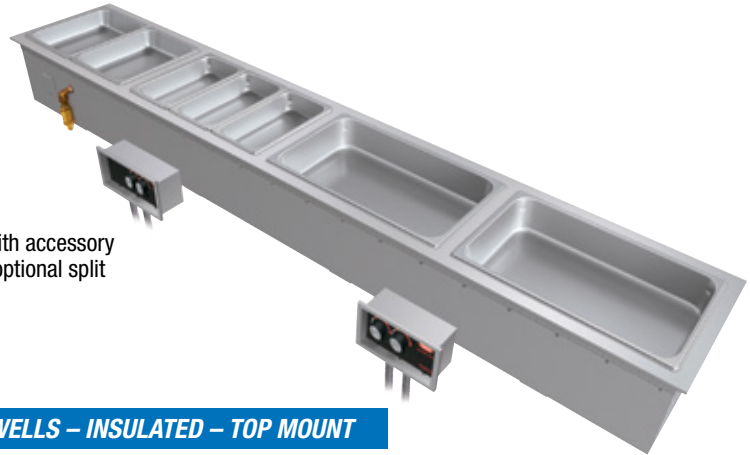

HWBI-S4MA with accessory food pans and optional split control boxes

DROP-IN MODULAR/GANGED SLIM RECTANGULAR WELLS – INSULATED – TOP MOUNT

Model	Voltage Single Phase	Dimensions W x D x H	Watts	Approx. Ship Weight	List Price
HWBI-S2	220	1156 x 397 x 238 mm	2415	38 kg	₹292404
HWBI-S2D	220	1156 x 397 x 238 mm	2415	37 kg	305592
HWBI-S2DA*	220	1156 x 397 x 238 mm	2415	38 kg	361032
HWBI-S2M	220	1156 x 397 x 238 mm	2415	39 kg	316596
HWBI-S2MA	220	1156 x 397 x 238 mm	2415	41 kg	390096
HWBI-S3	220	1715 x 397 x 238 mm	3615	54 kg	369096
HWBI-S3D	220	1715 x 397 x 238 mm	3615	53 kg	395892
HWBI-S3DA*	220	1715 x 397 x 238 mm	3615	57 kg	449904
HWBI-S3M	220	1715 x 397 x 238 mm	3615	57 kg	420924
HWBI-S3MA	220	1715 x 397 x 238 mm	3615	57 kg	494592
HWBI-S4	220	2273 x 397 x 238 mm	4815	70 kg	488880
HWBI-S4D	220	2273 x 397 x 238 mm	4815	71 kg	529956
HWBI-S4DA*	220	2273 x 397 x 238 mm	4815	73 kg	583884
HWBI-S4M	220	2273 x 397 x 238 mm	4815	70 kg	570024
HWBI-S4MA	220	2273 x 397 x 238 mm	4815	70 kg	641592

* Auto-fill located on left control only and fills left-hand well. To fill all wells, drains must be connected with external manifold by installer.

All Drop-In Modular/Ganged Slim Rectangular Heated Well Models Feature:

Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation and remote thermostats with lighted power switches.


OPTIONS (available at time of purchase only)

HWBI-SIDE	Copper Manifold Drain with side exit	No Charge
HWBI-BOTTOM	Copper Manifold Drain with bottom exit	No Charge
OS-BEZEL	481 mm depth Bezel for Modular unit to match Hatco CWB Slim models in a countertop display	No Charge



Gasket Options –


BEZELGASKET-S2	Factory installed for HWBI-S2	₹ 7812
BEZELGASKET-S3	Factory installed for HWBI-S3	10248
BEZELGASKET-S4	Factory installed for HWBI-S4	10248




BEZELGASKET-1

Factory-installed option (eliminates the need for silicone or other sealants)

COUNTERTOP CUTOUT DIMENSIONS – PAGE 25 ACCESSORIES – PAGES 27, 35-36

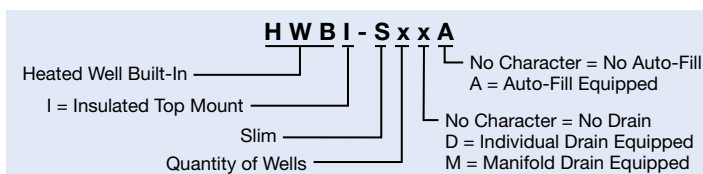

Modular/Ganged SLIM Heated Wells Controls*

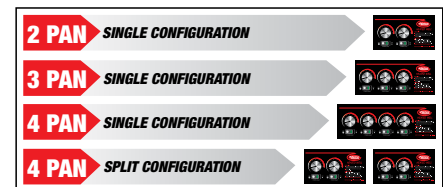

*4-Pan Units: Single control box is standard. If optional split control boxes are desired, it must be specified at order.

Modular/Ganged Heated Wells Accessories


(available for purchase at any time)

WELL COVERS

For Modular/Ganged Heated Wells and Modular/Ganged Slim Heated Wells.
(Choose the number of heated well covers for your appropriate pan size in either 1 or 2-Pan sizes, not available for HWBI43 series) –

1-Pan Heated Well Cover (Overall: 356 W x 559 D x 51 mm H) –		
1COVFUL-ASHGRAY	In Ash Gray simulated stone	₹54936
1COVFUL-BIRCH	In Birch simulated stone	54936
1COVFUL-ICE	In Ice simulated stone	54936
2-Pan Heated Well Cover (Overall: 711 W x 559 D x 51 mm H) –		
2COVFUL-ASHGRAY	In Ash Gray simulated stone	₹92652
2COVFUL-BIRCH	In Birch simulated stone	92652
2COVFUL-ICE	In Ice simulated stone	92652

1COVFUL-ASHGRAY
accessory

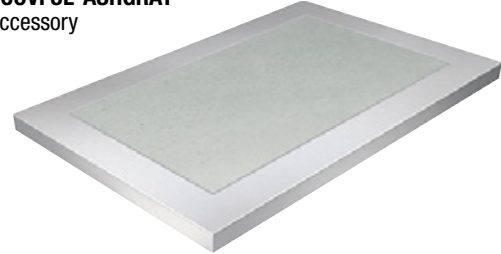


HEATED WELL COVER COMBINATIONS PER HWBI SERIES

Model Series	Using only:	Model Series	Using both:	
	1COVFUL		1COVFUL	2COVFUL
HWBI-1	1	HWBI-1	1	–
HWBI-2, -S2	2	HWBI-2	–	1
HWBI-3, -S3	3	HWBI-3	1	1
HWBI-4, -S4	4	HWBI-4	–	2
HWBI-5	5	HWBI-5	1	2
HWBI-6	6	HWBI-6	–	3


ADDITIONAL ACCESSORIES – PAGES 35-36
COLORS AND FINISHES – INSIDE BACK COVER



HWB-2-11Q



HWB-3-4Q



HWB-2-7Q

HWB-2-7Q
shown with two
7QT-PAN and
7QT-LID-1



ADAPTERS – SUPPORT BARS

HWB-2-7Q	Adapter to convert warmer to hold two 7-Liter Inserts (models HWBI & HWB-FUL series only)	8988
HWB-3-4Q	Adapter to convert warmer to hold three 4-Liter Inserts (models HWBI & HWB-FUL series only)	8988
HWB-2-11Q	Adapter to convert warmer to hold two 10-Liter Inserts (model HWB-43 and HWBI43 series only)	11256
HWBGM12BAR	305 mm Pan Support Bar for Drop-In Modular/Ganged Models	1932
HWBGM20BAR	508 mm Pan Support Bar for Drop-In Modular/Ganged Models (models HWBI- and HWBI-S series only)	2268


Support Bars
Choose the appropriate
kit for HWBI or
HWB series



MOUNTING KITS – VALVES

Necessary at your Well installation –

HWB-MNT-REC	Kit allows mounting to thick countertops - 8 Brackets (HWBI and HWB Rectangular Heated Wells only)	₹8232
External Manifold includes Individual Ball Valve for each Well (not available for the Slim models) –		
HWBI2MANIF	2-Pan Accessory	₹ 85176
HWBI3MANIF	3-Pan Accessory	120876
HWBI4MANIF	4-Pan Accessory	156576
HWBI5MANIF	5-Pan Accessory	192276
HWBI6MANIF	6-Pan Accessory	227976
BALLVALVE3/4	High Temperature 3/4" NPT Ball Valve for units with Individual Drain(s) and no Manifold	₹ 10752
BALLVALVE1INCH	High Temperature 1" NPT Ball Valve for units with Manifold Drain (Ganged Heated Wells only)	8232
GATEVALVE3/4IN	High Temperature 3/4" NPT Gate Valve for units with Individual Drain(s) and no Manifold	12348
GATEVALVE1IN	High Temperature 1" NPT Gate Valve for units with Manifold Drain (Ganged Heated Wells only)	18312
HWB-RDHV	Heated Well Remote Handle for 3/4" NPT Drains only and includes a Ball Valve	42420



HWB-MNT-REC




HWBI2MANIF



BALLVALVE1INCH



GATEVALVE1INCH



HWB-RDHV
Attaches to 3/4"
Drain and includes
a Ball Valve

Individual Built-In and Drop-In Heated Wells

Ordering Instructions

Wells

Please specify the following with each order:

1. **Desired Voltage:** 220V
2. **Base Size of Heated Well:**
 - A. Rectangular: Full (305 x 508 mm) or 4/3 (305 x 686 mm)
 - B. Round: 4-liter, 7-liter or 10-liter
3. **Drain** (with or without)
4. **Auto-fill** (with or without) All autofill units require a 1/4" NPT water connection
5. **Insulated or Uninsulated**



Insulated Well Construction
Full-size models are available with insulation for energy savings

6. **Mounting Style:**
 - A. Top Mounted
 - B. Bottom Mounted (rectangular full-size units only)
7. **Wattage:**
 - A. High watt
 - B. Standard watt


NOTE: 4-Liter Round Heated Wells are only available in standard watt configurations



Top Mounted Heated Well: Unit is mounted through the top surface of a sheet metal counter and secured with turn tabs (unit and food pan edge visible)




Bottom Mounted Heated Well: Full-size (only) unit is mounted to the bottom surface of a sheet metal counter and secured with customer provided turned bends and fasteners (only food pan edge visible)

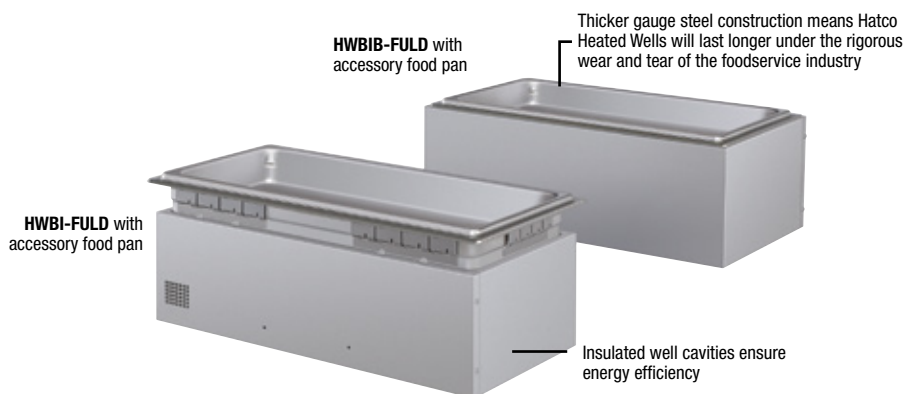

HWB-43D with accessory food pans (single unit holding 4 third-size pans – unit depth is 726 mm)



Easy to access the heating elements, if it ever becomes necessary to change them

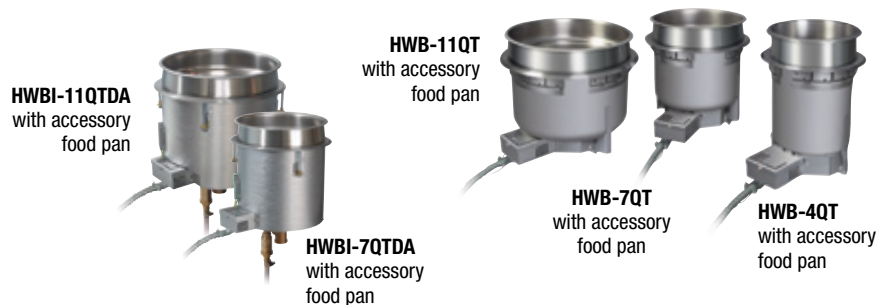

CONTROL BOXES, COUNTERTOP CUT-OUT DIMENSIONS – PAGE 29

H W B x x - x D A

Heated Well Built-In ————
No Character = Standard Watt
H = High Watt

No Character = Uninsulated
I = Insulated Top Mount
IB = Insulated Bottom Mount

No Character = No Auto-Fill
A = Auto-Fill Equipped

No Character = No Drain
D = Drain Equipped

FUL = Full-Size Pan
43 = 4/3-Size Pan
4QT = Round 4-Liter Pan
7QT = Round 7-Liter Pan
11QT = Round 10-Liter Pan

Individual Built-In And Drop-In Heated Wells Ordering Instructions

Options for Individual Built-In and Drop-In Heated Wells

1. Control Box:

- A. Larger (front mounted) Recessed Thermostatic Control Box with Lighted On/Off Rocker Switch and Angled Recessed Controls for easy readability (not for auto-fill)
- B. Optional ITC Control (not available for auto-fill, 4-liter Round Wells, Insulated Round Wells or units without a drain)
- C. Standard Control for auto-fill models only

STANDARD CONTROLS

Larger Recessed Thermostatic Control – No Charge (Not for Auto-fill)



OPTIONAL CONTROLS

ITC Control (Not available for 4-liter Round Wells, Insulated Round Wells, units without a drain or auto-fill)



2. Control Type :

Thermostatic

3. Leads: Extended high temp lead wire, per 305 mm

4. Thermostat with 1829 mm Capillary (914 mm standard)

5. Corners

- A. Standard (Rounded)
- B. Square

Accessories for Individual Built-In and Drop-In Heated Wells

1. Mounting Kits for combustible countertops (individual drop-in top mount units only)

2. Pan Support Bars: 305 or 508 mm

3. Adapters to convert rectangular full-size units to hold 4- or 7-liter round pans, or 4/3-size units to hold 10-liter round pans

4. Stainless Steel Pans:

- A. Third-size at 64 mm deep (324 W x 175 D x 64 H mm)
- B. Half-size at 64 mm deep (324 W x 264 D x 64 H mm)
- C. Full-size at 64 mm deep (324 W x 527 D x 64 H mm)
- D. Full-size at 102 mm deep (324 W x 527 D x 102 H mm)
- E. Full-size at 152 mm deep (324 W x 527 D x 152 H mm)

CONTROL TYPE

Thermostatic control



STANDARD CONTROL AUTO-FILL

HWB-43DA, HWBIB-FULDA, HWBI-FULDA, HWBI-7QTDA, -11QTDA Standard Control (only for auto-fill)



CONTROL CUTOUT DIMENSIONS

Standard Larger Recessed Thermostatic Control:

149 W x 162 H mm

Optional ITC Control:

149 W x 162 H mm

Standard Control for Auto-fill

257 W x 121 H mm

5. Valve:

- A. ¾" NPT Ball Valve for unit with Drain
- B. ¾" NPT Gate Valve for unit with Drain

6. Remote Handle for ¾" Drains only and includes a Ball Valve

ACCESSORIES – PAGES 35-36



How to Order a Hatco Heated Well in Video

Hatco has given you a variety of simple and easy ways to order your well. You can read the Ordering Instructions here or watch a video "How to Order a Hatco Heated Well." Go to hatcocorp.com and click on the Video Library. While you are here, watch the "Hatco Refrigerated Wells" video as well.

COMBUSTIBLE COUNTERTOP CUTOUTS – BUILT-IN AND DROP-IN HEATED WELLS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
HWB-FUL, -FULD, FULDA, HWBQ-FUL, FULD, FULDA	356 mm	362 mm	559 mm	565 mm
HWBI-FUL, -FULD, FULDA, HWBIQ-FUL, -FULD, FULDA	356 mm	362 mm	559 mm	565 mm
HWB-, HWBI-43	356 mm	362 mm	737 mm	743 mm
HWB-, HWBI-4QT	229 mm	235 mm	229 mm	235 mm
HWB-, HWBI-7QT	279 mm	286 mm	279 mm	286 mm
HWB-, HWBI-11QT	330 mm	337 mm	330 mm	337 mm

NONCOMBUSTIBLE COUNTERTOP CUTOUTS – BUILT-IN AND DROP-IN HEATED WELLS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
HWB-, HWBQ-FUL	321 mm	328 mm	524 mm	531 mm
HWB-, HWBQ-FULDA	321 mm	328 mm	524 mm	531 mm
HWBI-FUL, -FULD, HWBIQ-FUL, -FULD	324 mm	328 mm	528 mm	531 mm
HWBI-, HWBIQ-FULDA®	324 mm	328 mm	530 mm	532 mm
HWBIB-, HWBIBQ-FUL®, -FULDA®	306 mm	306 mm	509 mm	509 mm
HWB-, HWBI-43	323 mm	328 mm	704 mm	711 mm
HWB-4QT,	181 mm Dia.	192 mm Dia.	—	—
HWB-7QT	232 mm Dia.	243 mm Dia.	—	—
HWB-11QT	282 mm Dia.	294 mm Dia.	—	—
HWBI-4QT,	187 mm Dia.	187 mm Dia.	—	—
HWBI-7QT	243 mm Dia.	243 mm Dia.	—	—
HWBI-11QT	289 mm Dia.	289 mm Dia.	—	—

® Must be flanged.

Built-In Full-Size Heated Wells

Hatco Built-In Heated Wells hold heated foods at safe-serving temperatures. Compared to other models, Hatco units offer larger drain with a flat drain screen, more consistent holding temperatures, heavier stainless steel construction, easier-to-service design for quick change of components and a remote thermostat with separate power switch.

- Rectangular full-size only in top or bottom mount, insulated or uninsulated
- Standard or high watt
- Available with or without a drain (easy to clean with a larger drain and a flat screen)
- Easy access design allows for quick element or thermostat change
- Accessory mounting kits for combustible countertops available
- Accessory adapters to convert full-size wells to hold round pans available

Control Options

– See page 29

HWBIB-FULD with accessory food pan



HWBI-FULD with accessory food pan



HWB-FULD with accessory food pan

BUILT-IN FULL-SIZE RECTANGULAR WELLS

Model	Description	Dimensions W x D x H	Voltage	Watts	Approx. Ship Weight	List Price
Standard Watt						
HWB-FUL	Uninsulated Top or Bottom Mount	347 x 553 x 237 mm	220	1200	10 kg	₹ 79380
HWB-FULD	Uninsulated Top or Bottom Mount w/Drain	347 x 553 x 237 mm	220	1200	10 kg	83832
HWB-FULDA	Uninsulated Top or Bottom Mount w/Drain, Auto-fill	347 x 553 x 239 mm	220	1215	14 kg	152292
HWBI-FUL	Insulated Top or Bottom Mount	347 x 553 x 261 mm	220	1200	12 kg	90300
HWBI-FULD	Insulated Top or Bottom Mount w/Drain	347 x 553 x 261 mm	220	1200	11 kg	94752
HWBI-FULDA	Insulated Top Mount Only w/Drain, Auto-fill	347 x 553 x 263 mm	220	1215	14 kg	163212
HWBIB-FUL	Insulated Bottom Mount Only	352 x 561 x 236 mm	220	1200	13 kg	90300
HWBIB-FULD	Insulated Bottom Mount Only w/Drain	352 x 561 x 236 mm	220	1200	13 kg	94752
HWBIB-FULDA	Insulated Bottom Mount Only w/Drain, Auto-fill	352 x 561 x 236 mm	229	1215	16 kg	163212
High Watt						
HWBH-FUL	Uninsulated Top or Bottom Mount	347 x 553 x 237 mm	220	1650	10 kg	₹ 79380
HWBH-FULD	Uninsulated Top or Bottom Mount w/Drain	347 x 553 x 237 mm	220	1650	10 kg	83832
HWBH-FULDA	Uninsulated Top or Bottom Mount w/Drain, Auto-fill	347 x 553 x 239 mm	220	1665	12 kg	152292
HWBHI-FUL	Insulated Top or Bottom Mount	347 x 553 x 261 mm	220	1650	12 kg	90300
HWBHI-FULD	Insulated Top or Bottom Mount w/Drain	347 x 553 x 261 mm	220	1650	14 kg	94752
HWBHI-FULDA	Insulated Top Mount Only w/Drain, Auto-fill	347 x 553 x 263 mm	220	1665	14 kg	163212
HWBHIB-FUL	Insulated Bottom Mount Only	352 x 561 x 236 mm	220	1650	14 kg	90300
HWBHIB-FULD	Insulated Bottom Mount Only w/Drain	352 x 561 x 236 mm	220	1650	14 kg	94752
HWBHIB-FULDA	Insulated Bottom Mount Only w/Drain, Auto-fill	352 x 561 x 236 mm	220	1665	16 kg	163212

All Built-In Full-Size Rectangular Heated Well Models Feature:

Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation (top mounted only), 914 mm conduit and a remote thermostat with lighted power switch.

COUNTERTOP CUTOUT DIMENSIONS – PAGE 29


OPTIONS – PAGE 31

ACCESSORIES – PAGES 35-36



Optional auto-fill supply line

All Hatco Heated Wells can be ordered with or without drains (50% larger drain with exclusive flat screen ensures the pans set flush)

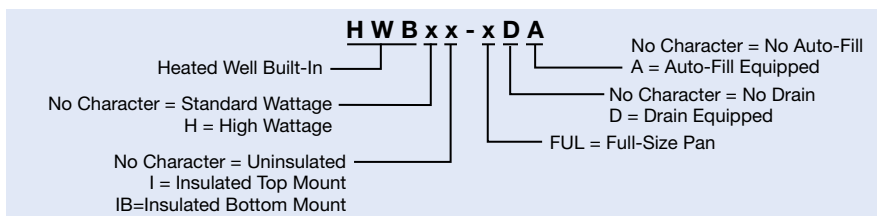

HWBL-43D and HWBLI-FULD
with accessory food pans (shown
with **GR2AHL** with standard
Designer non-adjustable stands
and optional *Designer* color and
sneeze guards)



OPTIONS (available at time of purchase only)

Designer Colors (Flush Mount Control Box Bezel, not available for Auto-fill or HWB-FUL w/cord) – Non-standard colors are non-returnable –

RED	Warm Red	₹3948
BLACK	Black	3948
GRAY	Gray Granite	3948
WHITE	White Granite	3948
NAVY	Navy Blue	3948
GREEN	Hunter Green	3948
COPPER	Antique Copper	3948
HWB-LEAD	Power Supply Lead Wire (Lead Wire only – Conduit not included)	per 305 mm ₹1176
HWB-CORD	HWB-FUL with Cord Standard (Shown below) All models except Auto-fill models, Only available for optional Compact Thermostatic Control with bezel	add 3612
HWBI-CORD	HWBI-FUL with Cord Standard (Shown below) All models except Insulated Top Mount with auto-fill	add 3612
HWBIB-BRKT	Mounting Bracket for Insulated Bottom Mount (HWBIB series)	add 2352
HWB-SQUARE	Square Pan corners (in lieu of standard round pan corners)	add 8904
Control Options –		
HWB-TSTAT	Thermostat with 1829 mm Capillary (Not available for auto-fill models) Larger Recessed Thermostatic Control (not available for auto-fill models, standard on 220 export models)	8064 No Charge
HWB-RTC		
HWB-ITC	ITC Control (not available for auto-fill models or units without a drain)	26880

ACCESSORIES – PAGES 35-36
COLORS AND FINISHES – INSIDE BACK COVER



HWB-ITC – Shown
with optional control
(not available for
auto-fill, units without
a drain) box bezel
in *Designer*
White Granite

Square Corner



Standard Corner



HWB-FUL
with optional **HWB-TSTAT**
Thermostat with 6' capillary
(Not available for auto-fill)



HWB-FUL with
optional **HWB-CORD**

HWBIB-FULD with
optional **HWBI-CORD**
and accessory food pan



Drop-In 4/3-Size Heated Wells

Convenient 4/3-Size Wells hold heated foods at safe-serving temperatures. Like the full-size models, Hatco units offer a larger drain with a flat drain screen, more consistent holding temperatures, heavier stainless steel construction, easier-to-service design for quick change of components and a remote thermostat with separate power switch.

- Rectangular 4/3-size wells
- Standard or high watt
- Available with or without a drain (easy to clean with a larger drain and a flat screen)
- Easy access design allows for quick element or thermostat change
- Accessory mounting kits for combustible countertops available
- Accessory adapters to convert 4/3-size wells to hold round pans



HWB-43D with accessory food pans (single unit holding 4 third-size pans)



HWBI-43D with accessory food pans (single unit holding 4 third-size pans)

DROP-IN 4/3-SIZE RECTANGULAR WELLS

Model	Description	Dimensions W x D x H	Voltage	Watts	Approx. Ship Weight	List Price
Standard Watt						
HWB-43	Uninsulated	345 x 726 x 239 mm	220	1200	11 kg	₹ 88452
HWB-43D	Uninsulated w/Drain	345 x 726 x 239 mm	220	1200	11 kg	92904
HWB-43DA	Uninsulated w/Drain, Auto-fill	345 x 726 x 239 mm	220	1215	12 kg	161364
HWBI-43	Insulated	345 x 726 x 262 mm	220	1200	14 kg	99372
HWBI-43D	Insulated w/Drain	345 x 726 x 262 mm	220	1200	14 kg	103824
High Watt						
HWBH-43	Uninsulated	345 x 726 x 239 mm	220	1650	11 kg	₹ 88452
HWBH-43D	Uninsulated w/Drain	345 x 726 x 239 mm	220	1650	11 kg	92904
HWBH-43DA	Uninsulated w/Drain, Auto-fill	345 x 726 x 239 mm	220	1665	14 kg	161364
HWBI-43	Insulated	345 x 726 x 262 mm	220	1650	14 kg	99372
HWBI-43D	Insulated w/Drain	345 x 726 x 262 mm	220	1650	14 kg	103824

All Drop-In 4/3-Size Rectangular Heated Well Models Feature:

Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation, 914 mm (36") conduit and a remote thermostat with lighted power switch.

OPTIONS (available at time of purchase only)

HWB-LEAD	Power Supply Lead Wire (Lead Wire only – Conduit not included)	per 305 mm	₹1176
HWB-AFL	Models HWB, HWBH-43DA only - Left water fill hole (front is standard)		No Charge
HWB-AFR	Models HWB, HWBH-43DA only - Right water fill hole (front is standard)		No Charge
Control Options – HWB-TSTAT	Thermostat with 1829 mm Capillary (not available for auto-fill models)		3612
HWB-RTC	Larger Recessed Thermostatic Control (not available for auto-fill, standard on 220 export models)		No Charge
HWB-ITC	ITC Control (not available for auto-fill models or units without a drain)		₹26880

Designer Colors (Control Box Bezel) –

Not available for Auto-fill –

Non-standard colors are

non-returnable –

Stainless Steel is standard –

RED	Warm Red	₹3948
BLACK	Black	3948
GRAY	Gray Granite	3948
WHITE	White Granite	3948
NAVY	Navy Blue	3948
GREEN	Hunter Green	3948
COPPER	Antique Copper	3948

CONTROL OPTIONS – PAGE 29


COUNTERTOP CUT-OUT DIMENSIONS – PAGE 29

ACCESSORIES – PAGES 35-36

COLORS AND FINISHES – INSIDE BACK COVER

Insulated Well Construction


Full-size models are available with insulation for energy savings

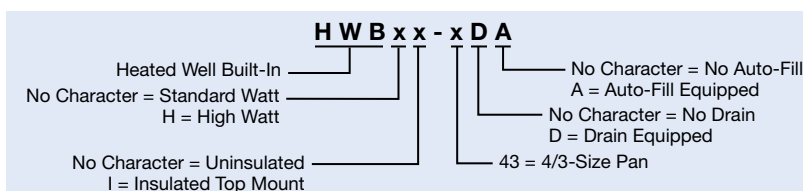

Drop-In Round Uninsulated Heated Wells

Keeping hot food at safe-serving temperatures is critical to any foodservice operation – and Hatco has the Heated Wells to meet the demands of any serving application. Thermostatic controls monitor and regulate the temperature of the well for more accurate heat and energy savings. Hatco controls feature a separate On/Off switch, which allows a previously determined setting to be maintained.

- 4-, 7- and 10-liter Round Wells
- Standard or high watt (4-liter standard watt only)
- With or without drain
- EZ locking hardware for easy top mount installation
- Accessory mounting kits for combustible countertops available

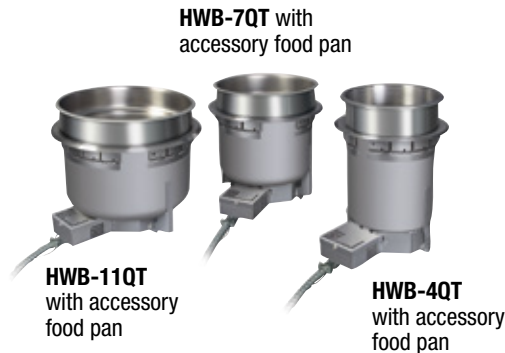

Control Options

- Larger front-mounted recessed thermostatic control box with lighted On/Off rocker switch and angled recessed controls for easy readability
- Optional ITC control with large control box available for easier reading on 7- or 10-liter (7- or 11-quart) standard or high watt configurations



Optional ITC control – (not for 4-liter Round Wells or units without a drain) shown with optional control box bezel in *Designer White Granite*



Large recessed thermostatic control (standard)

DROP-IN ROUND WELLS – UNINSULATED

Model	Description	Dimensions Dia. x H	Voltage	Watts	Approx. Ship Weight	List Price
4-Liter – Standard Watt						
HWB-4QT	Top Mount	212 x 270 mm	220	600	5 kg	₹75516
HWB-4QTD	Top Mount w/Drain	212 x 270 mm	220	600	5 kg	79968
7-Liter – Standard Watt						
HWB-7QT	Top Mount	262 x 244 mm	220	600	6 kg	₹75516
HWB-7QTD	Top Mount w/Drain	262 x 244 mm	220	600	6 kg	79968
7-Liter – High Watt						
HWBH-7QT	Top Mount	262 x 244 mm	220	800	6 kg	₹75516
HWBH-7QTD	Top Mount w/Drain	262 x 244 mm	220	800	6 kg	79968
10-Liter – Standard Watt						
HWB-11QT	Top Mount	313 x 244 mm	220	600	6 kg	₹75516
HWB-11QTD	Top Mount w/Drain	313 x 244 mm	220	600	6 kg	79968
10-Liter – High Watt						
HWBH-11QT	Top Mount	313 x 244 mm	220	800	6 kg	₹75516
HWBH-11QTD	Top Mount w/Drain	313 x 244 mm	220	800	6 kg	79968

All Drop-In Round Uninsulated Heated Well Models Feature:

Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation, 914 mm conduit and a remote thermostat with lighted power switch.

OPTIONS (available at time of purchase only)

HWB-LEAD	Power Supply Lead Wire (Lead Wire only – Conduit not included)	per 305 mm ₹1176
Control Options –		
HWB-TSTAT	Thermostat with 1829 mm Capillary	8064
HWB-RTC	Larger Recessed Thermostatic Control (not available for auto-fill)	No Charge
HWB-ITC	ITC Control with large Control Box for 7- and 10-liter Drop-In Round Wells only	₹26880


Designer Colors (Control Box Bezel) – Non-standard colors are non-returnable) – Stainless Steel is standard –

RED	Warm Red	₹3948
BLACK	Black	3948
GRAY	Gray Granite	3948
WHITE	White Granite	3948
NAVY	Navy Blue	3948
GREEN	Hunter Green	3948
COPPER	Antique Copper	3948

COUNTERTOP CUTOUT DIMENSIONS – PAGE 29

ACCESSORIES – PAGES 35-36

COLORS AND FINISHES – INSIDE BACK COVER

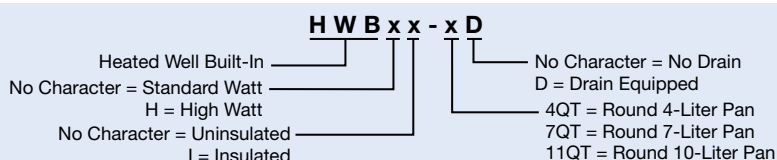

Drop-In Round Insulated Heated Wells

Hatco Drop-In Round Insulated Heated Wells provide flexibility and quality, with many options to choose from. These units hold steam table food hot and fresh with self-adjusting thermostats that monitor the actual temperatures and control the heat only when needed.

- Available in insulated 4-, 7- and 10-liter Round Wells
- Standard or high watt (4-liter standard watt only)
- Controls feature a separate lighted ON/OFF rocker switch and temperature dial, allowing preset temperatures to be maintained
- Easy service access to heating elements and thermostats
- Mounting kits for combustible countertops available
- Auto-Fill models available in 7 and 10 liter round wells

Control Options

- Larger front-mounted recessed thermostatic control box with lighted On/Off rocker switch and angled recessed controls for easy readability

HWBI-11QTDA with accessory food pan



Larger recessed thermostatic control at no charge

HWBI-7QTDA with accessory food pan



DROP-IN ROUND WELLS – INSULATED

Model	Description	Dimensions Dia. x H	Voltage	Watts	Approx. Ship Weight	List Price
4-Liter – Standard Watt						
HWBI-4QT	Top Mount	212 x 271 mm	220	600	5 kg	₹86436
HWBI-4QTD	Top Mount w/Drain	212 x 271 mm	220	600	6 kg	90888
7-Liter – Standard Watt						
HWBI-7QT	Top Mount	262 x 247 mm	220	600	6 kg	₹ 86436
HWBI-7QTD	Top Mount w/Drain	262 x 247 mm	220	600	7 kg	90888
HWBI-7QTDA	Top Mount w/Drain, Auto-fill	262 x 247 mm	220	615	9 kg	159348
7-Liter – High Watt						
HWBHI-7QT	Top Mount	262 x 247 mm	220	800	6 kg	₹ 86436
HWBHI-7QTD	Top Mount w/Drain	262 x 247 mm	220	800	6 kg	90888
HWBHI-7QTDA	Top Mount w/Drain, Auto-fill	262 x 247 mm	220	815	9 kg	159348
10-Liter – Standard Watt						
HWBI-11QT	Top Mount	313 x 246 mm	220	600	7 kg	₹ 86436
HWBI-11QTD	Top Mount w/Drain	313 x 246 mm	220	600	10 kg	90888
HWBI-11QTDA	Top Mount w/Drain, Auto-fill	313 x 246 mm	220	615	11 kg	159348
10-Liter – High Watt						
HWBHI-11QT	Top Mount	313 x 246 mm	220	800	7 kg	₹ 86436
HWBHI-11QTD	Top Mount w/Drain	313 x 246 mm	220	800	7 kg	90888
HWBHI-11QTDA	Top Mount w/Drain, Auto-fill	313 x 246 mm	220	815	12 kg	159348

All Drop-In Round Insulated Heated Well Models Feature:


Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation, 914 mm conduit and a remote thermostat with lighted power switch.

OPTIONS (available at time of purchase only)

HWB-LEAD	Power Supply Lead Wire (Lead Wire only – Conduit not included)	per 305 mm	₹1176
Control Options –			
HWB-TSTAT	Thermostat with 1829 mm Capillary (not available for auto-fill)		8064
HWB-RTC	Larger Recessed Thermostatic Control (not available for auto-fill, standard on 220 or 240V export models)		No Charge

COUNTERTOP CUTOUT DIMENSIONS – PAGE 29 ACCESSORIES – PAGES 35-36

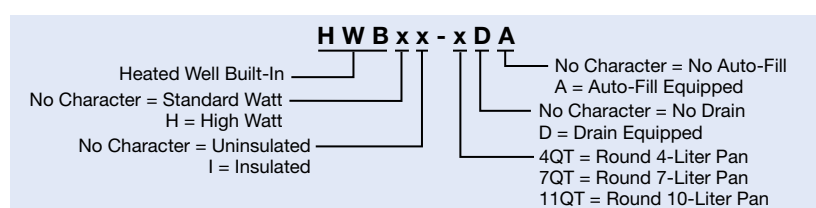

Heated Well Accessories *(available for purchase at any time)*



FTBX-2
with accessory
full-size
sheet pans

HWBI-2
with accessory
half and third-size
food pans

ST PAN 1/3

ST PAN 4

ST PAN 1/2

ST PAN 2



HDW 6" PAN

11QT-PAN



4QT-PAN

7QT-PAN

PANS – LIDS – TRIVETS

ST PAN 1/3	Third-Size Stainless Steel Pan – 324 W x 175 D x 64 H mm	₹ 5712
ST PAN 1/2	Half-Size Stainless Steel Pan – 324 W x 264 D x 64 H mm	6552
ST PAN 2	Full-Size Stainless Steel Pan – 324 W x 527 D x 64 H mm	7812
ST PAN 4	Full-Size Stainless Steel Pan – 324 W x 527 D x 102 H mm	9828
HDW 6" PAN	Full-Size Stainless Steel Pan – 324 W x 527 D x 152 H mm	10668
4QT-PAN	4-Liter Round Pan	10416
7QT-PAN	7-Liter Round Pan	11592
11QT-PAN	10-Liter Round Pan (not suitable for RHW, see page 38)	12768
Notched Lid for Round Pans (not suitable for RHW, see page 38) –		
4QT-LID-1	4-Liter Round, Notched, Solid Lid	₹4956
7QT-LID-1	7-Liter Round, Notched, Solid Lid	6048
11QT-LID-1	10-Liter Round, Notched, Solid Lid	7224
Hinged Lid for Round Pans (not suitable for RHW, see page 38) –		
4QT-LID	4-Liter Round, Hinged and Notched Lid	₹ 6468
7QT-LID	7-Liter Round, Hinged and Notched Lid	8484
11QT-LID	10-Liter Round, Hinged and Notched Lid	10584
Wire Trivets Stainless –		
TRIVET (1/2)SS	Half-Size – 259 W x 194 D mm	₹10584
TRIVET SS	Full-Size – 259 W x 457 D mm	14700



11QT-LID-1



4QT-LID-1



7QT-LID-1

11QT-LID



7QT-LID



4QT-LID

**TRIVET
(1/2)SS**

TRIVET SS




ADAPTERS, SUPPORT BARS, MOUNTING KITS, VALVES – PAGE 36

Heated Well Accessories (available for purchase at any time)

Wells


HWB-2-7Q
shown with two
7QT-PAN and
7QT-LID-1



HWB-2-7Q



HWB-2-11Q




HWB-3-4Q


ADAPTERS – SUPPORT BARS

HWB-2-7Q	Adapter to convert warmer to hold two 7-Liter Inserts (models HWBI & HWB-FUL series only)	₹ 8988
HWB-3-4Q	Adapter to convert warmer to hold three 4-Liter Inserts (models HWBI & HWB-FUL series only)	8988
HWB-2-11Q	Adapter to convert warmer to hold two 10-Liter Inserts (model HWB-43 and HWBI43 series only)	11256
HWB12BAR	305 mm Pan Support Bar for Built-In and Drop-In Heated Wells	1932
HWB20BAR	508 mm Pan Support Bar for Built-In and Drop-In Heated Wells	2268
HWBGM12BAR	305 mm Pan Support Bar for Drop-In Modular/Ganged Models	1932
HWBGM20BAR	508 mm Pan Support Bar for Drop-In Modular/Ganged Models (models HWBI- and HWBI-S series only)	2268

Support Bars
Choose the appropriate kit for CWB, HWBI or HWB series



HWB-FUL-MNT
Choose the appropriate kit for HWB-FUL, HWB-43 or HWB-4Q, -7Q, -11Q series



HWB-MNT-REC or HWB-MNT-RND



HWBI2MANIF



BALLVALVE1INCH



GATEVALVE1INCH

MOUNTING KITS – VALVES

Necessary at your Well installation –

HWB-FUL-MNT	Mounting Kit for combustible countertops for HWB-FUL series only	₹11508
HWB-43-MNT	Mounting Kit for combustible countertops for HWB-43 series only	13860
HWB-4Q-MNT	Mounting Kit for combustible countertops for HWB-4Q series only	6888
HWB-7Q-MNT	Mounting Kit for combustible countertops for HWB-7Q series only	7476
HWB-11Q-MNT	Mounting Kit for combustible countertops for HWB-11Q series only	8148
HWB-MNT-REC	Kit allows mounting to thick countertops - 8 Brackets (HWBI and HWB Rectangular Heated Wells only)	8232
HWB-MNT-RND	Kit allows mounting to thick countertops - 4 Brackets (Round Heated Wells only)	4116

External Manifold includes Individual Ball Valve for each Well (not available for the Slim models) –

HWBI2MANIF	2-Pan Accessory	₹ 85176
HWBI3MANIF	3-Pan Accessory	120876
HWBI4MANIF	4-Pan Accessory	156576
HWBI5MANIF	5-Pan Accessory	192276
HWBI6MANIF	6-Pan Accessory	227976

Necessary at your Well installation –

BALLVALVE3/4	High Temperature 3/4" NPT Ball Valve for units with Individual Drain(s) and no Manifold	₹10752
BALLVALVE1INCH	High Temperature 1" NPT Ball Valve for units with Manifold Drain (Ganged Heated Wells only)	8232
GATEVALVE3/4IN	High Temperature 3/4" NPT Gate Valve for units with Individual Drain(s) and no Manifold	12348
GATEVALVE1IN	High Temperature 1" NPT Gate Valve for units with Manifold Drain (Ganged Heated Wells only)	18312
HWB-RDHF	Heated Well Remote Handle for 3/4" NPT Drains only and includes a Ball Valve	42420



HWB-RDHF
Attaches to drain and includes a 3/4" ball valve

Countertop Heated Well

Providing versatility and reliability, Hatco Countertop Heated Wells hold food hot and fresh in either a wet or dry operation with an adjustable temperature control. The HW-FUL unit can hold a full-size pan or two half-size pans.

- Controls feature a separate lighted On/Off rocker switch and adjustable temperature dial
- May be used dry but performs best when used with water. Dry indicator lamp informs user to add water
- Thicker .8 mm stainless steel pan with a stainless steel housing (aluminized steel bottom)
- Pan edge offset to help keep condensation from dripping onto countertop surface

HW-FUL with accessory food pans and pan support bar




Wells

HOLD ONLY COUNTERTOP – FULL-SIZE					
Model	Dimensions W x D x H	Voltage	Watts	Approx. Ship Weight	List Price
Standard Watt					
HW-FUL	370 x 607 x 250 mm	230	1200	13 kg	₹53508

All Hold Only Countertop Heated Well Models Feature:
Voltage: Single phase.
Cord Location: Bottom left corner on back of unit.
Models Shipped with: Stainless steel (aluminized stainless steel bottom) housing with a metal sheathed heating element, a power On/Off switch, a temperature control, a dry unit indicator light and a 1829 mm cord with plug attached.

ACCESSORIES (available for purchase at any time)		
HW-2-7QT	Adapter to convert warmer to hold two 7-Liter Inserts	₹8232
HW-3-4QT	Adapter to convert warmer to hold three 4-Liter Inserts	8232
HW12BAR	305 mm Pan Support for Countertop Wells	1764
HW20BAR	508 mm Pan Support for Countertop Wells	2100

ADDITIONAL PAN AND LID ACCESSORIES – PAGES 35-36



HEATMAX Round Heated Wells

The multipurpose dry Heated Well from Hatco offers the flexibility of food warmers, soup kettles, Bain-Marie heaters, steamers and pasta cookers all in one! With a range of temperature settings, HEATMAX can boil pasta and soup noodles, steam dim sum and warm and hold soups, curry, gravies and toppings at safe-serving temperatures.

- Three temperature setpoints from 50°C to 100°C for warming, steaming and boiling
- Low power mode allows energy efficiency
- Single built-in model available (one 10-liter round pan)
- Freestanding units available as a single (one 10-liter round pan) or dual model (two 10-liter round pans) with individually-controlled pans



RHW-1B includes one well with 10-liter pot and hinged lid (ladle not included)



RHW-1 includes one well with 10-liter pot and hinged lid



RHW-2 includes two wells with two 10-liter pots and hinged lids (not shown)

NOTICE: All RHW HEATMAX Round Heated Wells are no longer available. Please go to page 11 to explore our new RHW2 HEATMAX Round Heated Well offerings for your foodservice needs.

FREESTANDING R

Model

RHW-1
RHW-2

All Freestanding Round

Liquid Capacity: RHW-1:

RHW-2:

warming

RHW-1 Shipped with: One

RHW-2 Shipped with: Two

Cord Location: 1829 mm

BUILT-IN ROUND HEATED WELL

Model	Voltage Single Phase	Dimensions W x D x H mm	kW	Approx. Ship Weight	List Price
RHW-1B	230	360 x 330 x 341	1.3	10 kg	₹56532

All Built-In Round Heated Well Models Feature:

Liquid Capacity: 10 liters. Actual pot capacity: 6 liters for boiling application or 8 liters for warming application.

RHW-1B Shipped with: One food holding pan, one pan lid and remote control.

Cord Location: 1422 mm cable from well to control box with a 1829 mm cord and plug located at the back of the control box.

Recommended Well Cut-Out Size: 305 mm diameter.

ACCESSORIES (pricing applies only at time of equipment purchase)

RHW -

RHW-11QT-LID-HG RHW Hinged Lid for 10-Liter Round Pan ₹ 8988

RHW-11QT-POT RHW 10-Liter Round Pan 11928




RHW-11QT-LID-HG

Hinged lid for 10-liter round pan

RHW-11QT-POT

10-liter round pan



RCTHW2 HEATMAX Rectangular Heated Wells

Hatco's 2nd generation HEATMAX Heated Wells are multipurpose units specially designed to rethermalize or cook pasta and vegetables. They can also be used to hold a wide variety of foods, including soups, curry, gravies, and a variety of toppings. An improved electronic controller monitors the heating element temperatures for optimum results.

- Equipped with two high-powered heating elements for efficient, even heating
- An improved electronic control panel and an energy saving low-power mode saves electricity during off-peak hours



RCTHW2-3B



RCTHW2-6 shown with standard RCTHW-PC and accessory RCTHW-BASKET

RCTHW2-6B unit comes standard with RCTHW-PC (Not Shown)



Wells

FREESTANDING RECTANGULAR HEATED WELL

Model	Dimensions W x D x H	kW	Amps	Ship Weight	List Price
RCTHW2-3	368 x 582 x 290 mm	3	11.5 - 12.5	12 kg	₹81564

All Freestanding Rectangular Heated Well Models Feature:

Voltage: 220 – 240V, single phase.

Cord Location: 1830 mm cord and plug, back of unit.

BUILT-IN RECTANGULAR HEATED WELL

Model	Dimensions W x D x H	kW	Amps	Ship Weight	List Price
RCTHW2-3B	368 x 582 x 302 mm	3	11.5 - 12.5	13 kg	₹86100

All Built-In Rectangular Heated Well Models Feature:

Voltage: 220 – 240V, single phase.

RCTHW2-3B Shipped with: Remote control.

Cord Location: 2000 mm cable from well to control box with a 1830 mm cord and plug located at the back of the control box.

Recommended Well Cut-Out Size: 550 mm W x 344 mm D.

FREESTANDING PASTA COOKER

Model	Dimensions W x D x H	kW	Amps	Ship Weight	List Price
RCTHW2-6	368 x 582 x 290 mm	6	23 - 25	13 kg	₹112812

All Freestanding Pasta Cooker Models Feature:

Voltage: 220 – 240V, single phase.

230/400V, three phase.

RCTHW2-6 Shipped with: Auto-fill, overflow drain, and RCTHW-PC.

Cord Location: 1830 mm cord and plug, back of unit.

BUILT-IN PASTA COOKER

Model	Dimensions W x D x H	kW	Amps	Ship Weight	List Price
RCTHW2-6B	390 x 610 x 302 mm	6	23 - 25	14 kg	₹115920

All Built-In Pasta Cooker Models Feature:

Voltage: 220 – 240V, single phase.

230/400V, three phase.


RCTHW2-6B Shipped with: Auto-fill, overflow drain, remote control, and RCTHW-PC.

Cord Location: 2000 mm cable from well to control box with a 1830 mm cord and plug located at the back of the control box.


Recommended Well Cut-Out Size: 570 mm W x 344 mm D.

ACCESSORIES (available for purchase at any time)


RCTHW-SK	RCTHW Soup Kettle Plate (7-Liter Pot not included)	₹11760
RCTHW-SW	RCTHW Bain-Marie/Sauce Warmer Plate (4-Liter Pot not included)	12180
RCTHW-SP	RCTHW Steamer Plate (6-Holes)	9660
RCTHW-PC	RCTHW Pasta Cooker Plate	17052
RCTHW-BASKET	RCTHW Noodle Basket with Stainless Steel Handle	2520
4QT-PAN	4-Liter Round Pan	10416
4QT-LID-1	4-Liter Notched Lid	4956
7QT-PAN	7-Liter Round Pan	11592
7QT-LID-1	7-Liter Notched Lid	6048




RCTHW-SK
Soup kettle plate



RCTHW-SW
Bain-Marie/sauce
warmer plate



RCTHW-SP
Steamer plate
(6 holes)



RCTHW-PC
Pasta cooker plate




RCTHW-BASKET
Noodle basket with
stainless steel handle




7QT-LID-1
7-liter
notched lid

4QT-LID-1
4-liter
notched lid



4QT-PAN
4-liter
round pan



Decorative Lamps & Display Lights





ORDERING INSTRUCTIONS

Luminaire lamps are for lighting only. LUMINAIRE option must be specified when lamps are utilized for decorative purposes only (no heating). This option is not field convertible. Maximum 100 watts.

CLEARANCE REQUIREMENTS

NOTE: Install 240V, 250W bulb no closer than 76 mm from a sidewall and no closer than 406 mm above a combustible surface, or no closer than 127 mm to a non-combustible surface.

NOTE: Install HIGH WATT 240V, 375W bulb no closer than 76 mm from a sidewall and no closer than 686 mm above a combustible surface, or no closer than 432 mm to a non-combustible surface (240V, 375W bulb not available).

NOTE: Multiple installations of Decorative Lamps must have a minimum of 305 mm on center of shade between each unit.



(From left to right) DL-2300-ASN, -2200-SU, -2100-SR, -1800-RCL, -2400-SU, -1600-RCL and -1700-ASU



Specify the following information with your order:

- Electrical:** 240V single phase and Wattage 100W (Luminaire), 250W (Standard) or 375W (High Watt)
- Mounting Style Code:** AS, C, RC, or S
- Switch Location Code:** Lower (L), None (N), Remote (R) or Upper (U).
DLH models must have remote switch or none
- Shade Style Code:** -400, -500, -600, -700, -725, -750, -760, -775, -800, -1100, -1400, -1500, -1600, -1700, -1800, -2100, -2200, -2300, -2400
- Shade and Canopy Colors:**
Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper, Smooth White, Gleaming Gold, Glossy Gray, Bold Black, Radiant Red (lampshade only), Brilliant Blue (lampshade only), Clear Coat Brushed Metal (lampshade only), Bright Brass, Bright Nickel, Bright Copper, Antique Nickel, Antique Brass, Antique Bronze
- Overall Unit Length:** For C, S or AS Mounts, from ceiling to bottom of warmer lamp shade
- Clearance:** From bulb to surface (see **NOTE** Clearance Requirements above)
- Accessory Bulb Color/Coating:**
40W Clear Coated (Luminaire only)
250W Clear Uncoated or Clear Coated
(240V, 375W bulb not available)
- Cord Color:** Black (standard), White (optional)

Special process required and extended lead times, see page 45 for additional charge.

Specify your appropriate accessories with your order.

Mounting Style availability dependent on Shade Style type. See page 43 & 44 for details.

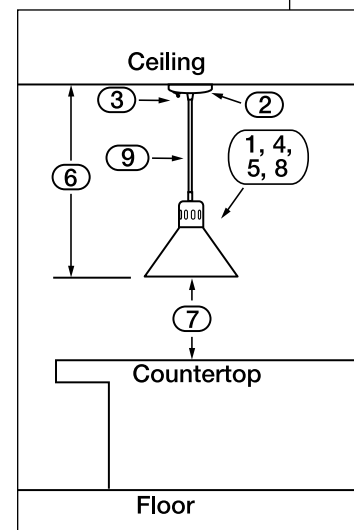


Decorative Lamps/ Luminaires

Hatco Decorative Lamps provide radiant heat to briefly hold food warm at kitchen work areas, waitress pickup stations or customer serving points, while enhancing your décor. Versatile enough for any location, from pick-up station to buffet lines, the range of lights are available with a selection of personalizing choices: shade styles, colors, switch locations and mounting arrangements. Configurations for lighting (Luminaire), as well as foodwarming, are available.

- Decorative Lamps are available in nineteen shade styles
- Four different mounting arrangements to choose from
- Available in seven *Designer* Colors, seven Gloss Finishes and six Plated Finishes
- Four power switch options: Upper (on canopy), Lower (at stem), Remote (shipped loose), None
- Available for food holding and display or lighting only applications

Rigid Stem and Adjustable Stem Mounts in unit color (except for Gloss finishes of Radiant Red, Brilliant Blue and Clear Brushed Metal)

Black cord is standard and white cord is optional. Various cord lengths available, starting at 432 mm, while rigid and retractable can vary

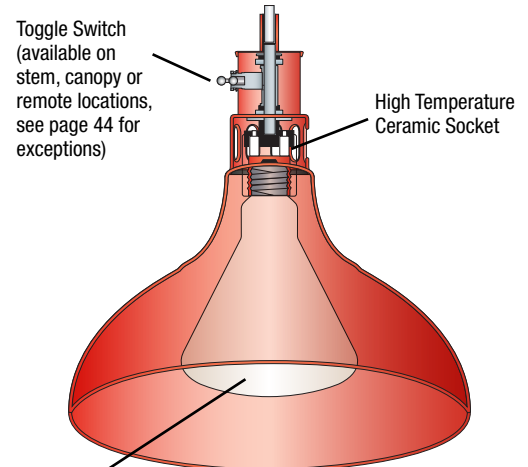


Bulbs:
40W clear coated (Luminaire only, 240V).
250W (DL models, 240V) in clear uncoated or coated
High watt bulb not available

NOTE: Decorative Lamps and Luminaires are non-returnable.

Build A Decorative Lamp

Hatco has given you a variety of simple and easy ways to "Build Your Decorative Lamp." You can go online or quickly do the work tables of "How to Build Your Lamp" on pages 43 through 45.

- GO online at: www.hatcocorp.com and click on "Build a Lamp" in the header. (Download a PDF of your lamp configuration in color and a Hatco List Price Quote)
- OR follow the six steps in the Hatco Price List (next three pages) to build your Hatco model code and List Price.

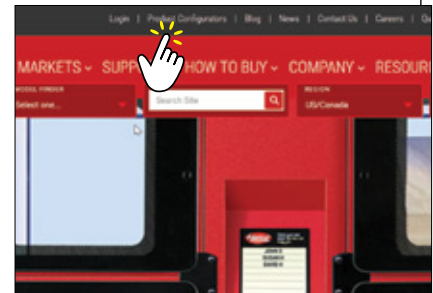

Hatco Website shown, click on "Product Configurators" then "Build A Lamp" in the header to configure your choices



Now you can develop your own Hatco Decorative Lamp solutions with our online lamp configurator.

Visit www.hatcocorp.com
Click on "Build a Lamp"

HOW TO BUILD A LAMP



Specify the following options when ordering:

1 Electrical	DL	(Standard Watt - 250 watt max)	No Charge
2 Mounting Style	C	(Cord Mount)	No Charge
3 Switch Location	R	(Remote Switch Location)	No Charge
4 Shade Style	-775	(See Shade Style on page 44)	₹40992
5 Shade Color	BBRASS	(Bright Brass Plated Finish)	16968
6 Overall Length	2032 mm	>1829 mm (₹14 over 1829 mm - only C Mounts)	2184
(Specify to the nearest inch – ASL, ASU, CL, CU, SL, SU mounts only).			TOTAL ₹60144

Information indicated in red are items that the customer should enter. Bulbs are not included.

Build A Decorative Lamp Configurator Worksheet

Complete the six steps on this worksheet to configure your Hatco model code and List Price. In order to get exactly what you need in the least amount of time, have this handy when ordering your Hatco Decorative Lamp.



Visit www.hatcocorp.com
Click on "Build a Lamp"



BUILD YOUR DECORATIVE/LUMINAIRE LAMPS – STEP 1 AND 2 (To determine your total list price and model code, pick all your options - bulb not included)

MOUNTING STYLES		SPECIFY the:	Shade Height	
			216 mm	267 mm
CORD	C Mount® Cord Mount to canopy. 	Overall Length	432 mm to any length	483 mm to any length
	RC Mount® Retractable Cord Mount. 		610 to 1829 mm	686 to 1905 mm
STEM	S Mount® Rigid Stem Mount to canopy. 	Overall Length	356 to 1803 mm	406 to 1854 mm
ADJUSTABLE	Review Switch Locations in Step 3 on next page to determine your appropriate model code.			
	AS Mount® At install only, limited height adjustments with Rigid Stem Mount to canopy. 	Adjustable Overall Length (at install only)	ASU, ASR, ASN	
			356 to 406 mm 406 to 495 mm 508 to 686 mm 686 to 1067 mm 1067 to 1829 mm	407 to 457 mm 457 to 546 mm 559 to 737 mm 737 to 1118 mm 1118 to 1880 mm
			ASL	
			406 to 432 mm 457 to 559 mm 559 to 711 mm 737 to 1092 mm 1118 to 1854 mm	457 to 483 mm 508 to 610 mm 610 to 762 mm 788 to 1143 mm 1169 to 1905 mm

⊗ Not available with a lower switch for DL-2100, -2200, -2300 or -2400

⊗ Not available for DL-2100, -2200, -2300 or -2400

STEP 1: VOLTAGE AND WATTAGE

Voltage 240V **No Charge**

Wattage **No Charge**

DLL- Luminaire 100 watt max
DL- Standard 250 watt max
DLH- High Watt 375 watt max

STEP 2: MOUNTING STYLE

Mounting Style –

Adjustable Stem Mount
(Limited height adjustment at install only, mount with rigid stem mount to canopy)

AS	Adjustable Stem Mount	₹15456
C	Cord (specify Cord Color)	No Charge
RC	Retractable Cord Mount (specify Cord Color)	38808
S	Stem	6888

Rigid Stem Mounted (Knock down shipping on S units)



DL-1600-RCL shown with Retractable Cord Mount.



Aluminum Plated Coupler provides a high strength hold for the Adjustable Stem Mount

Go to next page for Steps 3-4.

NOTE: Decorative Lamps and Luminaires are non-returnable.

DL x - x x x x - x x x

Decorative Lamp ———— Switch Location
No Character = Standard Watt ———— Mounting Style
L=Luminaire Low Watt ———— Shade Style
H = High Wattage

Build A Decorative Lamp Configurator Worksheet

Continued from page 43

BUILD YOUR DECORATIVE/LUMINAIRE LAMPS – STEP 3 AND 4

(To determine your total list price and model code, pick all your options - bulb not included)



STEP 3: SWITCH LOCATION

Switch Location –	No Charge
L Lower (not available on high watt models)	
N None	
R Remote	
U Upper (not available on high watt models)	

SWITCH LOCATIONS

L - Lower Switch
Not available on:

- DLH (high watt models)
- Not available for DL-2100, -2200, -2300 or -2400.

R - Remote Switch

- Accommodates 10 amps
- Up to four 250W lamps maximum per remote switch


U - Upper Switch
Not available on

- DLH (high watt models)
- RC Mount

STEP 4: SHADE STYLE

Shade Code	Ship Weight (depending on components)	List Price
-400	3-5 kg	₹37464
-500	3-5 kg	37464
-600	3-5 kg	37464
-700	3-5 kg	37464
-725	3-5 kg	₹40992
-750	3-5 kg	40992
-760	3-5 kg	40992
-775	3-5 kg	40992
-800	3-5 kg	40992
-1100	3-5 kg	40992
-1400	3-5 kg	40992
-1500	3-5 kg	₹46620
-1600	3-5 kg	40992
-1700	3-5 kg	40992
-1800	3-5 kg	40992
-2100	3-5 kg	₹35700
-2200	3-5 kg	35700
-2300	3-5 kg	35700
-2400	3-5 kg	35700

SHADE STYLES (height and width shown)

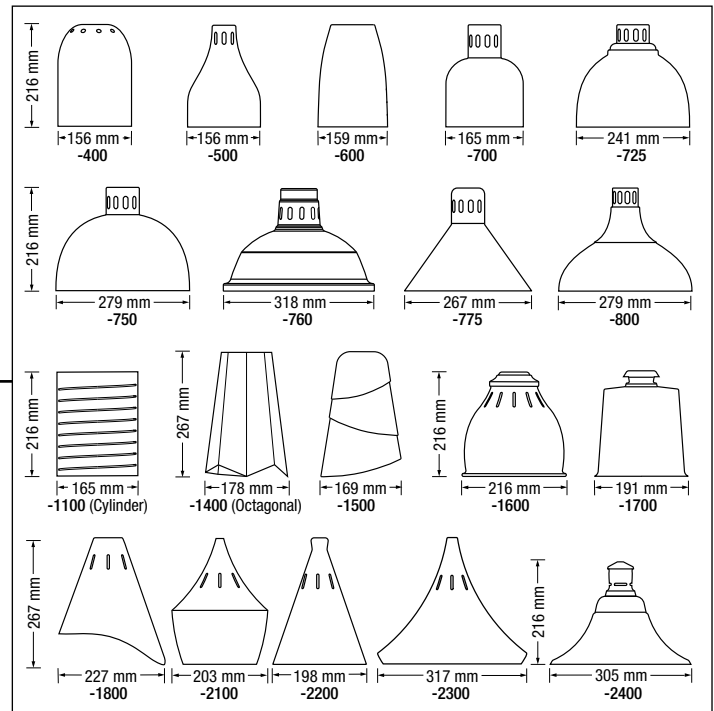

Go to next page for Steps 5-6.

NOTE: Decorative Lamps and Luminaires are non-returnable.

DLx - xxxx - xxx

Decorative Lamp ——— Switch Location
 No Character = Standard Watt ——— Mounting Style
 L=Luminaire Low Watt ——— Shade Style
 H = High Wattage

Build A Decorative Lamp Configurator Worksheet

Continued from page 44

BUILD YOUR DECORATIVE/LUMINAIRE LAMPS – STEP 5 AND 6

(To determine your total list price and model code, pick all your options - bulb not included)



Visit www.hatcocorp.com
Click on "Build a Lamp"

SHADE AND CANOPY COLORS

Designer Colors

Warm Red	Black	Gray Granite	White Granite	Navy Blue	Hunter Green	Antique Copper

Gloss Finishes

Smooth White	Gleaming Gold	Glossy Gray	Bold Black

***Gloss Finishes for Shade Only – Special Process Required and Extended Lead Times**

Radiant Red	Brilliant Blue	Clear Brushed Metal

Plated Finishes – Special Process Required and Extended Lead Times

Bright Brass	Bright Nickel	Bright Copper	Antique Nickel	Antique Brass	Antique Bronze

Exception: DL-1500 for Shade Only – Must choose other finish for remainder of unit

Designer Black/ Antique Copper/ Black	Gloss Bold Black/ Plated Bright Nickel*/ Gloss Bold Black*	Gloss Bold Black/ Plated Bright Copper*/ Gloss Bold Black*	Gloss Bold Black/ Plated Antique Nickel*/ Gloss Bold Black*	Gloss Bold Black/ Radiant Red/ Bold Black*

***Gloss and Plated Finishes – Special Process Required and Extended Lead Times**
*Plated Finishes – See Step 5, Plated Finishes for additional charge

Printed colors are a representation and may not exactly match our Designer, Gloss and Plated Finishes.

STEP 5: SHADE AND CANOPY COLORS*

Shade and Canopy Colors –

Designer Colors		No Charge
RED	Warm Red	NAVY Navy Blue
BLACK	Black	GREEN Hunter Green
GRAY	Gray Granite	COPPER Antique Copper
WHITE	White Granite	

Gloss Finishes		No Charge
SWHITE	Smooth White	GGRAY Glossy Gray
GGOLD	Gleaming Gold	BBLACK Bold Black

*Gloss Finishes for Shade Only – (must choose other finish for remainder of unit) – Special Process Required and Extended Lead Times

RRED	Radiant Red
BBLUE	Brilliant Blue
CL-COAT	Clear Brushed Metal

Special Process Required and Extended Lead Times – Plated Finishes –

BBRASS	Bright Brass	₹16968
BNICKEL	Bright Nickel	16968
BCOPPER	Bright Copper	16968
ANICKEL	Antique Nickel	16968
ABRASS	Antique Brass	16968
ABRONZE	Antique Bronze	16968

STEP 6: OVERALL LENGTH


Overall Length – For C Mounts, from ceiling to bottom of warmer lamp shade.

Up to 1829 mm	No Charge
Greater than 1829 mm (C Mount only)	₹2184

YOUR TOTAL LIST PRICE AND MODEL CODE

Add the total costs of options below (not for retrofit – bulb not included) –

Step 1	Electrical	₹ 0.00
Step 2	Mounting Style	
Step 3	Switch Location	0.00
Step 4	Shade Style	
Step 5	Shade and Canopy Colors	
Step 6	Overall Length	
Your Total Price (bulb not included)		₹



NOTE: Decorative Lamps and Luminares are non-returnable.

BULBS AND ACCESSORIES – PAGE 46



DL-750-RL in
Clear Brushed
Metal shade finish
and unit in *Designer*
Black

OPTIONS (available at time of purchase only)

DL-CORD-WHITE	White Cord (C=Cord, R=Retractable Mounts Only) (Black is standard)	No Charge
Leads – For any ASL, SL, ASR, SR or ASU, SU Mount units, must specify Lead Length –		
LEADS5	305-1524 mm Extended Electrical Leads	₹2436
LEADS10	1829-3048 mm Extended Electrical Leads	4872
LEADS15	3353-4572 mm Extended Electrical Leads	7308
LEADS20	4877-6096 mm Extended Electrical Leads	9744

ACCESSORIES (available for purchase at any time)

WHITE-UCTD-240	240 Volt, 250 Watt Clear Bulb, Uncoated	each ₹5796
WHITE-CTD-240	240 Volt, 250 Watt Clear Bulb, Coated	each 6972
WHITE-CTD-240L	240 Volt, 40 Watt Clear Bulb, Coated (Luminaire models only)	each 1428

NOTE: Decorative Lamps and Luminaires are non-returnable.

WHITE-CTD-240L



WHITE-UCTD-240
(240 volt, 250 watt clear
bulb, uncoated)



WHITE-CTD-240
(240 volt, 250 watt clear
bulb, coated)

GLOMAX® Curved Display Lights

A stylish choice for illuminating your serving area. The Curved Display Light offers the highest light output that is ideal for illuminating food products using a neutral white 4000K light. Hatco provides you with a wide variety of colors and lengths for any serving area.

- Features a patented curved housing design with energy efficient dual LED lights across the display lamp that provide longer performance and energy savings (compared to standard incandescent bulbs)
- Field replaceable dual LED lights
- Matches the Hatco line of GLOMAX® Curved Infrared Strip Heaters for a fully integrated look
- Angle brackets and 152 mm LED leads are standard
- Optional non-adjustable tubular stands and top or bottom mounting stands available

HLC5-36
Clear Anodized (standard)
shown in top and
underside views



Decorative Lamps
& Display Lights

GLOMAX® CURVED DISPLAY LIGHTS

Model	Width	Voltage Single Phase	Watts	Amps	Approx. Ship Weight†	List Price
HLC5-24	610 mm	220-240	11-11	.05-.05	4 kg	₹31752
HLC5-30	762 mm	220-240	11-11	.05-.05	5 kg	34524
HLC5-36	915 mm	220-240	14-14	.06-.06	6 kg	36372
HLC5-42	1067 mm	220-240	15-16	.07-.07	6 kg	38556
HLC5-48	1219 mm	220-240	17-18	.08-.08	7 kg	40488
HLC5-54	1372 mm	220-240	19-19	.08-.08	7 kg	43596
HLC5-60	1524 mm	220-240	19-20	.09-.08	7 kg	45864
HLC5-66	1677 mm	220-240	22-22	.10-.09	8 kg	47880
HLC5-72	1829 mm	220-240	22-23	.10-.09	8 kg	51408
HLC5-78	1982 mm	220-240	24-24	.11-.10	9 kg	54348

† Weights do not include shipping materials.

All Curved Display Light Models Feature:

Voltage: 220-240, single phase.

Models Shipped with: End panels, angle brackets with rocker switch under unit on power side.

Leads: 1524 mm leads - on power side.

Dimensions: 762 mm-1829 mm W x 150 mm D x 51 mm H (height includes standard angle bracket).

OPTIONS (available at time of purchase only)

Housing Color – Clear Anodized standard – End panels and Angle Brackets match unit color –

Non-standard colors are non-returnable –

BLACKANOD Black Anodized per 305 mm ₹840

LED Color – 4000K Neutral White standard

WW 3050K Warm White No Charge

Non-Adjustable Tubular Stands, bottom mount, attach to counter – match unit color

NTL16-CLEAR Clear Anodized Non-Adjustable Tubular Stands 1 pair ₹3780

SEE MANUAL FOR STAND MOUNTING MEASUREMENT GUIDE

HLC5 - x x

Curved Display Light Width (Inches)
Aluminum Housing



Hatco® Flav-R-Shield® Sneeze Guards



People who serve, products that solve.®



Double-Sided Self-Service
Sneeze Guard Model **ES92**
with **GR5AHL** Strip Heaters


Not only can you design the perfect sneeze guard to meet your needs (via our online configurator), but you can also integrate one of Hatco's signature strip heater or lights to showcase your offering.

A clear win for safety


Protect food without affecting visibility

With Hatco® quality and innovation, safeguarding food items is easier than ever. Ideal for buffet lines, serving stations or events, our Flav-R-Shield® Sneeze Guards bring maximum protection, visibility, functionality and style to any foodservice operation. With full-service, portable and self-service models to choose from, we make it easy to create the perfect sneeze guard option for your needs. Plus, with a quick turnaround from order to shipping, you're ensured Hatco dependability on a timeline that works for you.

Discover the innovation that fuels our products and drives your success.



Portable Sneeze Guard
Model **ORBIT720**
with accessory
end panels

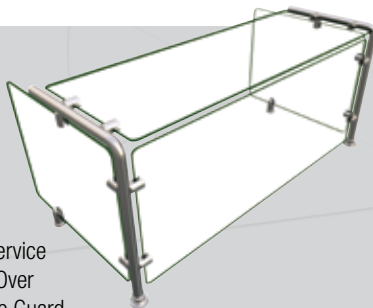

Full-Service
Pass-Over
Sneeze Guard
Model **EP11**



Portable Adjustable
Sneeze Guard
Model **ALLIN1**



Full-Service
Sneeze Guard
Model **EP5**

Configure it!

Hatco has made it a snap to create a customized Sneeze Guard to your exact specifications, with one of the most powerful online configurators to date. Once you arrive at the Hatco Sneeze Guard website (scan QR code to the right or use this URL: www.hatcosneezeguards.com), please click on your choice:

- Full-Service
- Self-Serve
- Barrier
- Portable
- Convertible
- ORBIT

...and click on Quotation. You'll be directed to the configurator for that product.



**Sneeze Guard
CONFIGURE IT!**
Hardware, glass,
lighting & more!
hatcosneezeguards.com

Configure your Hatco Flav-R-Shield® Sneeze Guard today!

Strip Heaters




GLOMAX® Curved Infrared Strip Heaters

This stylish design, based on Hatco's signature GLOMAX® Strip Heaters, is the perfect solution for your front-of-the-house applications. Superb for buffet and serving lines, the sleek curved design minimizes its size while accenting and warming the products below.

The entire holding surface is heated evenly with no "cold" spots thanks to Hatco's dependable infrared element technology.

- Narrow, curved design uses a very small footprint: 51 H x 153 D mm
- Widths available from 762 - 1981 mm
- Angle brackets (mounting) standard
- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food

- End panels and mounting brackets match unit color
- Includes Remote Control Enclosure (RMB)

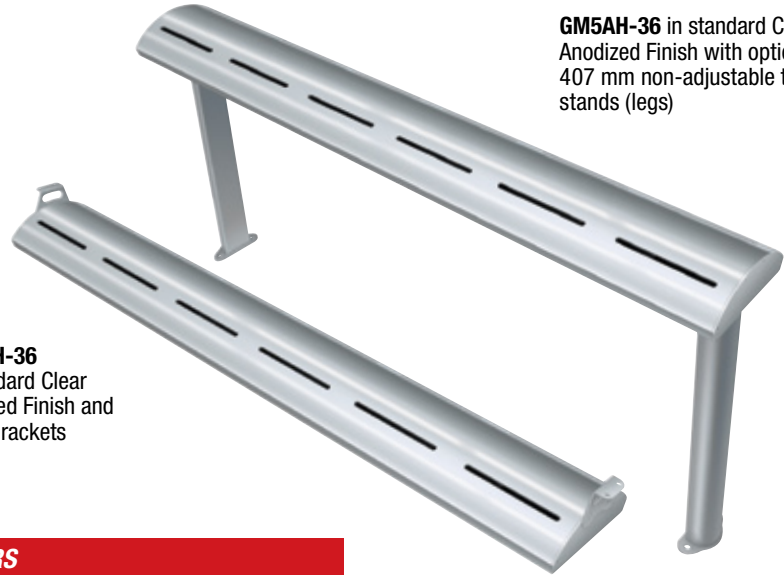

GM5AH-36 in standard Clear Anodized Finish with optional 407 mm non-adjustable tubular stands (legs)

GM5AH-36 in standard Clear Anodized Finish and angle brackets

GLOMAX CURVED INFRARED STRIP HEATERS

Model	Width	Watts 220-230V	Amps	Approx. Ship Weight	List Price
High Watt					
GM5AH-24	610 mm	500-546	2.3-2.4	6 kg	₹40740
GM5AH-30	762 mm	660-721	3.0-3.1	7 kg	42924
GM5AH-36	914 mm	800-874	3.6-3.8	7 kg	45108
GM5AH-42	1067 mm	950-1038	4.3-4.5	8 kg	47964
GM5AH-48	1219 mm	1100-1202	5.0-5.2	9 kg	50484
GM5AH-54	1372 mm	1250-1366	5.7-5.9	9 kg	52668
GM5AH-60	1524 mm	1400-1530	6.4-6.7	10 kg	55356
GM5AH-66	1676 mm	1560-1705	7.1-7.4	11 kg	58296
GM5AH-72	1829 mm	1725-1885	7.8-8.2	11 kg	60900
GM5AH-78	1981 mm	1890-2066	8.6-9.0	12 kg	63336

All Models Feature:

Switch Location: Remote Control Enclosure (RMB) with power On/Off switch included.

Leads: 1524 mm Power Leads.

Angle Brackets: Provides 25 mm clearance between Strip Heater and oversheff.

Dimensions: 762-1981 W x 153 D x 51 H mm.

Control Box Dimensions: 190 W x 68 mm H.

Cut Out Dimensions: 162 W x 51 H mm.

OPTIONS (available at time of purchase only)

Non-Adjustable Tubular Stands, bottom mount, attach to counter – match unit color

NTL5-16 407 mm clearance

1 pair 3780

Sneeze Guard Support Bracket hardware only for GM5A(H), GM5A(H)L models only – 24" D x 4 1/8" H (Glass not included)

SG5-BKT-CLA

Kit/Breath Protector Assembly, Clear Anodized Hardware


₹5796

RECOMMENDED MOUNTING HEIGHTS – PAGE 64

OPTIONS – PAGE 52



SG5-BKT-CLA



GLOMAX® Curved Infrared Strip Heaters with LED Lights

Hatco's GLOMAX® Curved Infrared Strip Heaters with LED Lights feature a housing design that is low-profile, elliptical-shaped and stylish, the ideal solution for front-of-the-house applications where heat and lights are needed.

- Narrow, curved design: 51 H x 153 D mm uses a very small footprint
- Lengths available from 762-1981 mm
- Energy efficient, warm LED lights span the entire strip heater, which provide longer performance and energy savings compared to standard incandescent bulbs
- Angle Brackets (mounting) standard
- End panels and Angle Brackets match unit color
- Includes Remote Control Enclosure (RMB) with power On/Off switch (controls lights and heat)
- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food



GM5AHL-36 Top and bottom view. Shown in standard Clear Anodized Finish and standard Angle Brackets.

GLOMAX CURVED INFRARED STRIP HEATERS WITH LED LIGHTS

Model	Width	Watts 220-230V	Amps	Approx. Ship Weight	List Price
High Watt					
GM5AHL-24	610 mm	510-555	2.3-2.4	5 kg	₹49476
GM5AHL-30	762 mm	671-733	3.1-3.2	6 kg	52416
GM5AHL-36	914 mm	813 - 889	3.7-3.9	7 kg	54852
GM5AHL-42	1067 mm	964-1054	4.4-4.6	7 kg	57960
GM5AHL-48	1219 mm	1116-1220	5.1-5.3	8 kg	60732
GM5AHL-54	1372 mm	1267-1385	5.8- 6.0	9 kg	63420
GM5AHL-60	1524 mm	1418-1550	6.4-6.7	9 kg	66024
GM5AHL-66	1676 mm	1579-1726	7.2- 7.5	10 kg	69972
GM5AHL-72	1829 mm	1744-1907	7.9-8.3	10 kg	72576
GM5AHL-78	1981 mm	1911-2089	8.7- 9.1	11 kg	76188

All Models Feature:

Switch Location: Remote Control Enclosure (RMB) with power On/Off switch (controls lights and heat) included.

Leads: 1524 mm Power Leads

Angle Brackets: Provides 25 mm clearance between strip heater and overshelf.

Dimensions: 762-1981 W x 153 D x 51 H mm.

Control Box Dimensions: 190 W x 68 H mm.

Cut Out Dimensions: 162 W x 51 H mm.

OPTIONS – PAGE 52





OPTIONS (available at time of purchase only)

Non-Adjustable Tubular Stands, bottom mount, attach to counter – match unit color
NTL5-16 407 mm clearance

1 pair 3780

Sneeze Guard Support Bracket hardware only for GM5A(H), GM5A(H)L models only – 610 D x 105 H mm (Glass not included)
SG5-BKT-CLA Kit/Breath Protector Assembly, Clear Anodized Hardware

₹5796

A **GM5AHL-60** model in standard Clear Anodized finish above a **GRS-54**



SG5-BKT-CLA

RECOMMENDED MOUNTING HEIGHTS – PAGE 64

Glo-Ray® Infrared Strip Heaters

Safely hold the temperature of your product without drying out or further cooking food with Hatco's Glo-Ray® Infrared Foodwarmers. The end result is hot, fresh food that's ready-to-serve. The sturdy stainless steel or continuous aluminum housing and heavy-duty mountings ensure the durability and quality of Hatco products.

- Ensures maximum flavor, safety and holding time
- Provides even heat distribution – no cold spots
- Sturdy extruded aluminum housings that do not sag, from 457 to 1829 mm
- Reflector does not blacken, maintaining a consistent heat pattern
- Protective reinforced wire guard supports heating element without affecting heat distribution
- Heavy-duty insulation minimizes heat loss

- Optional sneeze guards (excludes stainless steel models)
- Available with lights (excludes stainless steel models)
- Available in stainless steel housing 457 to 1829 mm
- Additional reflector styles and lower wattage elements available, consult factory for more information

STAINLESS STEEL STRIP HEATERS – HIGH WATT

Model ^o	Dimensions W x D x H	Voltage Single Phase 220V Amps	Watts	Approx. Ship Weight	List Price
GRH-18	457 x 152 x 69 mm	1.6	350	3 kg	₹45528
GRH-24	610 x 152 x 69 mm	2.3	500	3 kg	47880
GRH-36	914 x 152 x 69 mm	3.6	800	5 kg	53928
GRH-48	1219 x 152 x 69 mm	5.0	1100	5 kg	58548
GRH-60	1524 x 152 x 69 mm	6.4	1400	7 kg	66108
GRH-72	1829 x 152 x 69 mm	7.8	1725	9 kg	78540
GRH-96	2438 x 152 x 69 mm	10.9	2400	11 kg	94920

^o GRH models are not available with lights or sneeze guards.

All Stainless Steel Models Feature:

Toggle Switch (max. 15 Amps) Location: Chef's left side.

Leads: 152 mm pigtail leads – server's right.

ALUMINUM STRIP HEATERS – HIGH WATT

Model	Dimensions W x D x H	Voltage Single Phase 220V Amps	Watts	Approx. Ship Weight	List Price
GRAH-18	457 x 152 x 64 mm	1.6	350	3 kg	₹30576
GRAH-24	610 x 152 x 64 mm	2.3	500	4 kg	32088
GRAH-30	762 x 152 x 64 mm	3.3	660	4 kg	34272
GRAH-36	914 x 152 x 64 mm	3.6	800	4 kg	36372
GRAH-42	1067 x 152 x 64 mm	4.3	950	5 kg	38556
GRAH-48	1219 x 152 x 64 mm	5.5	1100	5 kg	40908
GRAH-54	1372 x 152 x 64 mm	5.7	1250	6 kg	43428
GRAH-60	1524 x 152 x 64 mm	6.4	1400	7 kg	46284
GRAH-66	1676 x 152 x 64 mm	7.1	1560	8 kg	50820
GRAH-72	1829 x 152 x 64 mm	7.8	1725	8 kg	57288
GRAH-84	2134 x 152 x 64 mm	9.3	2050	9 kg	66024
GRAH-96	2438 x 152 x 64 mm	10.9	2400	10 kg	75012

All Aluminum Models Feature:

Toggle Switch (max. 15 Amps) Location: Chef's left side (unless otherwise specified).

Leads: 152 mm pigtail leads – server's right.

ALUMINUM STRIP HEATERS WITH LIGHTS – HIGH WATT

Model	Bulbs	Dimensions W x D x H	Voltage Single Phase 220V Amps	Watts	Approx. Ship Weight	List Price
GRAHL-18	2	457 x 229 x 64 mm	2.1	470	4 kg	₹ 47964
GRAHL-24	2	610 x 229 x 64 mm	2.9	620	5 kg	49896
GRAHL-30	2	762 x 229 x 64 mm	3.6	780	5 kg	55356
GRAHL-36	3	914 x 229 x 64 mm	4.5	980	6 kg	60900
GRAHL-42	3	1067 x 229 x 64 mm	5.2	1130	8 kg	66696
GRAHL-48	4	1219 x 229 x 64 mm	6.2	1340	8 kg	72408
GRAHL-54	4	1372 x 229 x 64 mm	6.9	1490	9 kg	78960
GRAHL-60	5	1524 x 229 x 64 mm	7.8	1700	10 kg	85764
GRAHL-66	5	1676 x 229 x 64 mm	8.6	1860	10 kg	93744
GRAHL-72	6	1829 x 229 x 64 mm	9.6	2085	16 kg	104328
GRAHL-84	7	2134 x 229 x 64 mm	8.6	2470	18 kg	120372
GRAHL-96	8	2438 x 229 x 64 mm	13.3	2880	25 kg	136416

All Aluminum Models with Lights Feature:

Toggle Switch (max. 15 Amps) Location: Chef's left side – light side (unless otherwise specified).

Leads: 152 mm pigtail leads – server's right.

OPTIONS AND ACCESSORIES – PAGE 54

RECOMMENDED MOUNTING HEIGHTS – PAGE 64




GRAH-48 with optional sneeze guards, cord and plug set and T-leg Stands




GRAH-24



GRAH-36 with optional Navy Blue Designer color, infinite switch, cord and plug set and accessory C-leg Stands



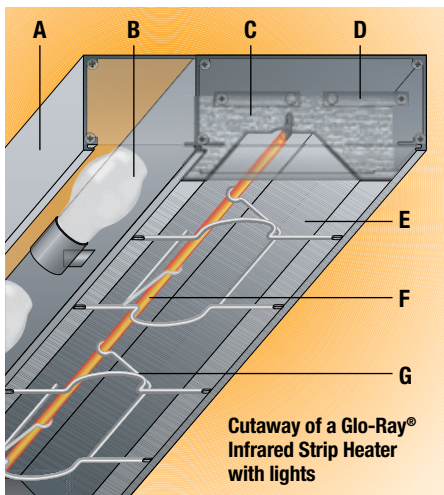

Cutaway of a Glo-Ray® Infrared Strip Heater with lights

- A** Stainless steel or sturdy aluminum housings that do not sag, from 457 up to 1829 mm in 153 mm increments. Stainless units available in single units without lights, up to 1829 mm in width
- B** Shatter-resistant incandescent lights (standard on GRAHL)
- C** Heavy-duty insulation minimizes heat loss
- D** Standard hanger tabs are provided
- E** Aluminized reflector retains full heat intensity and directs more heat towards the edges of the holding surface
- F** Long life metal sheathed heating element
- G** Wire guard supports the heating element and provides operator safety without affecting heat distribution

OPTIONS (available at time of purchase only)

Designer colors, aluminum models 457-1829 mm – Clear Anodized Standard – Non-standard colors are non-returnable –

COLOR-6	152 mm Housing for GRAH models							per 305 mm	₹2940
COLOR-9	229 mm Housing for GRAHL models							per 305 mm	2940
	RED Warm Red	GRAY Gray Granite	NAVY Navy Blue	COPPER Antique Copper					
	BLACK Black	WHITE White Granite	GREEN Hunter Green						

Gloss Finishes, aluminum models 457-1829 mm – Clear Anodized Standard – Non-standard colors are non-returnable –

GLOSS-6	152 mm Housing for GRAH models							per 305 mm	₹4032
GLOSS-9	229 mm Housing for GRAHL models							per 305 mm	4032
	RRED Radiant Red	GGRAY Glossy Gray	BBLACK Bold Black						
	GGOLD Gleaming Gold	BBLUE Brilliant Blue							

CAP-EX	Attached 1829 mm Cord and Plug Set on models up to 1829 mm								₹3360
IND. LGT	Indicator Light (remote control only on stainless steel units)								1848

Extended Electrical Leads (Power) – Must specify lead length –

LEADS5	305-1525 mm Extended Electrical Leads								₹2436
LEADS10	1829-3048 mm Extended Electrical Leads								4872
LEADS15	3352-4572 mm Extended Electrical Leads								7308
LEADS20	4877-6096 mm Extended Electrical Leads								9744

9.375BP1	238 mm Sneeze Guard – one side							per 305 mm	₹ 6468
9.375BP2	238 mm Sneeze Guard – two sides							per 305 mm	12936
14BP1	356 mm Sneeze Guard – one side							per 305 mm	10248
14BP2	356 mm Sneeze Guard – two sides							per 305 mm	20496
NO BULB	No bulb Option (GRAHL 230V models only)								No Charge

LIGHTS-ADD'L	Extra Lamps – Installed (max. two per 305 mm less one – one per 305 mm is standard), must be ordered with remote switches only							each	2940
3 ANEAL REFL	Bright Annealed Reflector for lights							per 305 mm	2436

Infinite Control (REMOTE ENCLOSURE RECOMMENDED)

BLT INF	Built-In (max. of 12.2 Amps) – remote installation recommended								₹4284
----------------	--	--	--	--	--	--	--	--	-------

Remote Control Enclosure (RMB) – available in Designer colors and Gloss finishes – Clear Anodized Standard – Non-standard colors are non-returnable –

See Page 63 for models and prices

ATL	Adjustable Tubular Stands 254-356 mm (not available in Designer colors)							pair	₹22260
NTL-10, -12	Non-Adjustable Tubular Stands (specify 254 or 305 mm clearance)							pair	10248
NTL-14, -16	Non-Adjustable Tubular Stands (specify 356 or 406 mm clearance)							pair	11004
NTL-PAINT	Non-Adjustable Tubular Stand (specify Designer color or Gloss finish) – Clear Anodized Standard – Non-standard colors are non-returnable –							pair	4200
TL-13	T-Leg Stands (343 mm clearance) for models up to 1829 mm							pair	31248
TL-16	T-Leg Stands (406 mm clearance) for models up to 1829 mm							pair	33180
TL-18	T-Leg Stands (457 mm clearance) for models up to 1829 mm							pair	35616

ACCESSORIES (available for purchase at any time) – see page 62 for illustrations

CL-HIGH	C-Leg Stands High Watt – 343 mm clearance (for models up to 1829 mm)							pair	₹13188
GR-ANGLE	Adjustable Angle Brackets for GRH models only							pair	2604
ADJ ANGLE	Adjustable Angle Brackets for GRAH, GRAHL models only							pair	2604
ADJ ANGLE7	178 mm tall Adjustable Angle Bracket for GRAH, GRAHL models only							pair	3108
CHAIN 1	Chain Suspension							per 305 mm	1260

Chef LED 230V adjustable bulb – bulbs must be rotated down –

GRAHL-xx models only, all voltages, pass through usage only –

GRAHL-xx must be 457 mm or higher from surface as pass through –

CLED-3000-230 Similar to warm halogen **CLED-4000-230** Similar to cool fluorescent

₹11676

COLORS AND FINISHES – INSIDE BACK COVER

CLED-3000 and -4000 Accessory



Glo-Ray® Dual Infrared Strip Heaters


Create a deeper holding area with Glo-Ray® Aluminum Dual Infrared Strip Heaters mounted side-by-side, keeping hot food at optimum serving temperatures. The pre-focused heat pattern directs heat from a metal sheathed element across the entire holding surface. The continuous aluminum housing and heavy-duty mountings ensure the durability and quality of Hatco products.

- Ensures maximum flavor, safety and holding time
- Provides even heat distribution – no cold spots
- Sturdy extruded aluminum housings that do not sag, from 457 to 1829 mm
- Long life metal sheathed heating elements
- Reflector does not blacken, maintaining a consistent heat pattern

- Reinforced wire guard provides operator safety without affecting heat distribution
- 76 or 152 mm spacer available
- Additional reflector styles and lower wattage elements available, consult factory for more information



GRAH-36D with standard 76 mm spacer

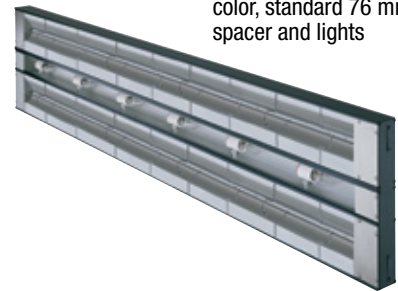

GRAHL-72D with optional *Designer* color, standard 76 mm spacer and lights

ALUMINUM DUAL STRIP HEATERS – HIGH WATT

Model	Width	Voltage Single Phase		Approx. Ship Weight	List Price	
		220V Amps	Watts		76 mm Spacer	152 mm Spacer
GRAH-18D	457 mm	3.2	700	7 kg	₹ 75264	₹ 76524
GRAH-24D	610 mm	4.5	1000	8 kg	78456	79716
GRAH-30D	762 mm	6.0	1320	9 kg	86604	88368
GRAH-36D	914 mm	7.3	1600	9 kg	94752	96516
GRAH-42D	1067 mm	8.6	1900	11 kg	102900	104664
GRAH-48D	1219 mm	10.0	2200	13 kg	110964	113316
GRAH-54D	1372 mm	11.4	2500	14 kg	119028	121380
GRAH-60D	1524 mm	12.7	2800	16 kg	128100	131712
GRAH-66D	1676 mm	14.2	3120	18 kg	140616	144228
GRAH-72D	1829 mm	15.7	3450	19 kg	157248	160860
GRAH-84D	2134 mm	18.6	4100	23 kg	181608	186480
GRAH-96D	2438 mm	21.8	4800	24 kg	206724	211596


All Aluminum Dual Models Feature:

Toggle Switch (max. 15 Amps) Location: Chef's left side (unless otherwise specified).

Leads: 152 mm pigtail leads – server's right.

Dimensions: With 76 mm Spacer (standard): 457-1829 W x 381 D x 64 H mm.

With 152 mm Spacer: 457-1829 W x 457 D x 64 H mm.

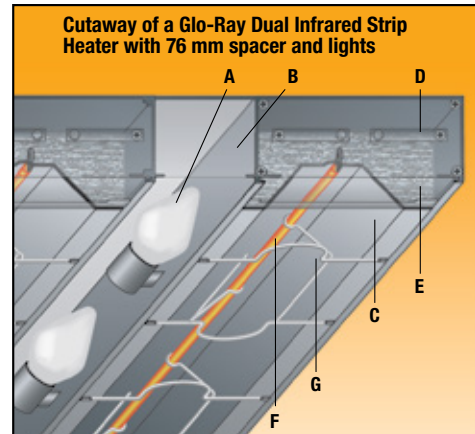

A Shown with optional shatter-resistant incandescent lights

B Sturdy extruded aluminum housings that do not sag, from 457 up to 1829 mm

C Reflector does not blacken, maintaining a consistent heat pattern

D Standard hanger tab is provided for under shelf or chain installation

E Heavy-duty insulation minimizes heat loss

F Long life metal sheathed heating elements

G Protective reinforced wire guard supports heating element without affecting heat distribution

ALUMINUM DUAL STRIP HEATERS WITH LIGHTS – HIGH WATT

Model	Bulbs	Width	Voltage Single Phase		Approx. Ship Weight	List Price	
			220V Amps	Watts		76 mm Spacer	152 mm Spacer
GRAHL-18D	2	457 mm	3.7	820	7 kg	₹ 83412	₹ 84672
GRAHL-24D	2	610 mm	5.1	1120	8 kg	86100	87360
GRAHL-30D	2	762 mm	6.5	1440	9 kg	95928	97692
GRAHL-36D	3	914 mm	8.1	1780	10 kg	105840	107604
GRAHL-42D	3	1067 mm	9.5	2080	12 kg	116088	117852
GRAHL-48D	4	1219 mm	11.1	2440	14 kg	126504	128856
GRAHL-54D	4	1372 mm	12.5	2740	15 kg	137424	139776
GRAHL-60D	5	1524 mm	14.1	3100	17 kg	149352	152964
GRAHL-66D	5	1676 mm	15.5	3420	18 kg	163380	166992
GRAHL-72D	6	1829 mm	17.3	3810	20 kg	182532	186144
GRAHL-84D	7	2134 mm	20.5	4520	23 kg	210924	215796
GRAHL-96D	8	2438 mm	24.0	5280	25 kg	239484	244356

All Aluminum Dual Models with Lights Feature:


Toggle Switch (max. 15 Amps) Location: Chef's left side (unless otherwise specified).

Leads: 152 mm pigtail leads – server's right.

Dimensions: With 76 mm Spacer (standard): 457-1829 W x 381 D x 64 H mm.

With 152 mm Spacer: 457-1829 W x 457 D x 64 H mm.

OPTIONS AND ACCESSORIES – PAGE 56
RECOMMENDED MOUNTING HEIGHTS – PAGE 64




A series of **GRAH-60D** models

OPTIONS (available at time of purchase only)

Designer colors, aluminum models 457-1829 mm – Non-standard colors are non-returnable – Clear Anodized standard –

COLOR-15, -18	381 and 457 mm Housings for GRAH and GRAHL Dual models	per 305 mm	₹4200
RED Warm Red	GRAY Gray Granite	NAVY Navy Blue	COPPER Antique Copper
BLACK Black	WHITE White Granite	GREEN Hunter Green	

Gloss finishes, aluminum models 457-1829 mm – Non-standard colors are non-returnable – Clear Anodized standard –

GLOSS-15, -18	381 and 457 mm Housings for GRAH and GRAHL Dual models	per 305 mm	₹5376
RRED Radiant Red	GGRAY Glossy Gray	BBLACK Bold Black	
GGOLD Gleaming Gold	BBLUE Brilliant Blue		

IND. LGT	Indicator Light (remote only)		1848
-----------------	-------------------------------	--	------

Extended Electrical Leads (Power) – Must specify lead length –

LEADS5	305-1525 mm Extended Electrical Leads		₹2436
LEADS10	1829-3048 mm Extended Electrical Leads		4872
LEADS15	3352-4572 mm Extended Electrical Leads		7308
LEADS20	4877-6096 mm Extended Electrical Leads		9744

9.375BP1	238 mm Sneeze Guard – one side	per 305 mm	₹ 6468
-----------------	--------------------------------	------------	--------

9.375BP2	238 mm Sneeze Guard – two sides	per 305 mm	12936
-----------------	---------------------------------	------------	-------

14BP1	356 mm Sneeze Guard – one side	per 305 mm	10248
--------------	--------------------------------	------------	-------

14BP2	356 mm Sneeze Guard – two sides	per 305 mm	20496
--------------	---------------------------------	------------	-------

NO BULB	No bulb Option (GRAHL-xxD 230V models only)		No Charge
----------------	---	--	-----------

LIGHTS-ADD'L	Extra Lamps – Installed (max. two per 305 mm less one), one per 305 mm is standard	each	2940
---------------------	--	------	------

3 ANEAL REFL	Bright Annealed Reflector for lights with 76 mm Spacer	per 305 mm	2436
---------------------	--	------------	------

6 ANEAL REFL	Bright Annealed Reflector for lights with 152 mm Spacer	per 305 mm	3612
---------------------	---	------------	------

Remote Control Enclosure (RMB) – available in Designer colors and Gloss finishes – Clear Anodized Standard –
Non-standard colors are non-returnable –

See page 63 for models and prices

RMB-ATT	Factory attaches Remote Control Enclosure to Strip Heater (GRAH, GRAHL Dual models only) (must select RMB on page 63 and add cost)		₹ 4032
----------------	--	--	--------

ATL-D	Adjustable Tubular Stands 254-356 mm (not available in Designer colors)	2 pair	44520
--------------	---	--------	-------

NTL-10-D, -12-D	Non-Adjustable Tubular Stands (specify 254 or 305 mm clearance)	2 pair	20496
------------------------	---	--------	-------

NTL-14-D, -16-D	Non-Adjustable Tubular Stands (specify 356 or 406 mm clearance)	2 pair	22008
------------------------	---	--------	-------

NTL-PAINT-D	Non-Adjustable Tubular Stands in Designer color or Gloss finish (specify color or finish) – Clear Anodized Standard – Non-standard colors are non-returnable –	2 pair	8400
--------------------	--	--------	------

ACCESSORIES (available for purchase at any time) – see page 62 for illustrations

ADJ ANGLE-D	Adjustable Angle Brackets	2 pair	₹5208
--------------------	---------------------------	--------	-------

ADJ ANGLE7-D	178 mm tall Adjustable Angle Brackets	2 pair	6216
---------------------	---------------------------------------	--------	------

CHAIN 1	Chain Suspension	per 305 mm	1260
----------------	------------------	------------	------

Chef LED 230V adjustable bulb – bulbs must be rotated down –
GRAHL-xxD models only, all voltages, pass through usage only –

GRAHL-xxD must be 457 mm or higher from surface as pass through –

CLED-3000-230	Similar to warm halogen	CLED-4000-230	Similar to cool fluorescent	₹11676
----------------------	-------------------------	----------------------	-----------------------------	--------

COLORS AND FINISHES – INSIDE BACK COVER

CLED-3000 and
-4000 Accessory



Ultra-Glo® Ceramic Infrared Strip Heaters

Hatco Ultra-Glo® Ceramic Strip Heaters provide the ultimate holding power. Increased heights improve working clearances and the heat zone blankets the entire holding area. All models include adjustable angle brackets for mounting. Available with or without lights, with attached or Remote Control Enclosure (RMB) (recommended). Ideal for a fabricator who wants to incorporate a food warmer component into their final assembly.

- Pre-focused pyramidal heat pattern concentrates the heat at the edges where heat loss is the greatest
- Increased height improves operational working clearances, giving the chef and server an improved ergonomic working environment
- Available in widths from 457 to 1829 mm
- Adaptable to many locations and configurations, including back-of-the-house use, open kitchen concepts or buffet lines
- Optional coated shatter-resistant incandescent bulbs enhance product displays while safeguarding food from bulb breakage



UGAH-18 with optional Gloss finish – recommended with Remote Control Enclosure (RMB) (not shown)

ALUMINUM CERAMIC STRIP HEATERS – HIGH WATT

Standard Control Box includes toggle switch(es) and Indicator Light(s)

Model	Width	Voltage Single Phase	Watts	Amps	Approx. Ship Weight ^o	List Price ^o
UGAH-18	457 mm	220	630	2.9	5 kg	₹ 71820
UGAH-24	610 mm	220	756	3.4	5 kg	72828
UGAH-30	762 mm	220	945	4.7	6 kg	87528
UGAH-36	914 mm	220	1260	5.7	7 kg	88452
UGAH-42	1067 mm	220	1680	7.6	7 kg	102900
UGAH-48	1219 mm	220	1890	8.6	9 kg	103908
UGAH-54	1372 mm	220	2268	10.3	9 kg	117600
UGAH-60	1524 mm	220	2520	11.5	11 kg	118692
UGAH-66	1676 mm	220	2520	11.5	11 kg	132636
UGAH-72	1829 mm	220	3025	13.8	11 kg	135660

ALUMINUM CERAMIC STRIP HEATERS WITH LIGHTS – HIGH WATT

Model	Bulbs	Width	Voltage Single Phase	Watts	Amps	Approx. Ship Weight ^o	List Price ^o
UGAHL-18	1	457 mm	220	680	3.1	5 kg	₹ 87864
UGAHL-24	2	610 mm	220	856	3.9	5 kg	89460
UGAHL-30	2	762 mm	220	1045	4.8	8 kg	107436
UGAHL-36	3	914 mm	220	1410	6.4	8 kg	111804
UGAHL-42	3	1067 mm	220	1830	8.3	9 kg	128940
UGAHL-48	4	1219 mm	220	2090	9.5	10 kg	133308
UGAHL-54	4	1372 mm	220	2468	11.2	11 kg	150696
UGAHL-60	5	1524 mm	220	2770	12.6	12 kg	156072
UGAHL-66	5	1676 mm	220	2770	12.6	14 kg	172284
UGAHL-72	6	1829 mm	220	3324	15.1	15 kg	177744

^o Does not include Remote Control Enclosure (RMB).

^o Includes either attached control or Remote Control Enclosure (RMB) with toggle switch(es) and indicator light(s).

^o Units with lights not available with attached control box. Available with Remote Control Enclosure (RMB) (not included in unit price) or no switches.

All Ceramic Models Feature:

with 152 mm Leads.

UGAH Dimensions with Remote Control Enclosure, (RMB) Toggle and Indicator Light:
457-1829 W x 152 D x 64 H mm.


UGAHL Dimensions with Remote Control Enclosure (RMB), Toggle and Indicator Light:
457-1829 W x 229 D x 64 H mm.

UGAH Dimensions with Attached Box: 457-1829 W x 251 D x 64 H mm.


OPTIONS – PAGE 59

REMOTE CONTROL ENCLOSURES (RMBs) – PAGE 63

RECOMMENDED MOUNTING HEIGHTS – PAGE 64

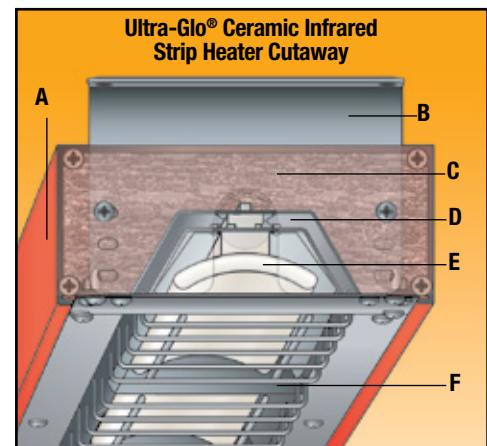


- A** Sturdy aluminum housings that do not sag, widths from 457 up to 1829 mm in 152 mm increments
- B** Adjustable standard mounting bracket (allows three different mounting heights and allows connection to end of the unit)
- C** Heavy-duty insulation surrounds heating element to keep exterior housing cooler and minimize heat loss
- D** Dual aluminized steel reflector keeps housing cooler, focuses more heat towards the food
- E** Shape of element focuses the heat on the food
- F** Protective wire guards under heating element



Ultra-Glo® Ceramic Dual Infrared Strip Heaters

Hatco Ultra-Glo® Ceramic Strip Heaters provide the ultimate holding power. Increased height improves working clearances and the heat zone blankets the entire holding area. All models include adjustable angle brackets for mounting. Dual mounted Strip Heaters accommodate wider food holding areas. Ideal for a fabricator who wants to incorporate a foodwarmer component into their final assembly.

- Increased height that the ceramic heat source affords, improves operational working clearances, giving the chef and server an improved ergonomic environment in which to work
- Adaptable to any location and configuration, including back- or front-of-the-house use, open kitchen concepts or buffet lines
- Sturdy continuous aluminum housings
- Available in widths from 457 to 1829 mm
- Pre-focused heat pattern provides an increased pyramidal dimension, concentrating heat at the edges where heat loss is the greatest

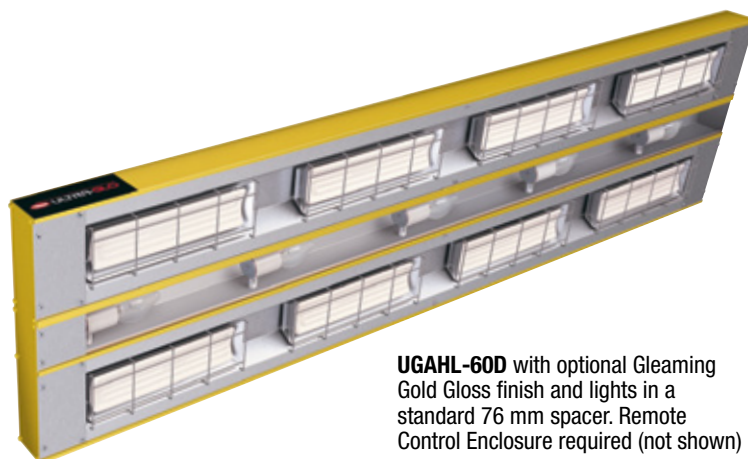

UGAHL-60D with optional Gleaming Gold Gloss finish and lights in a standard 76 mm spacer. Remote Control Enclosure required (not shown)

ALUMINUM DUAL CERAMIC STRIP HEATERS – HIGH WATT

Standard Control Box includes toggle switch(es) and indicator light(s)

Model	Width	Voltage (Single Phase)	Watts	Approx. Ship Weight [○]	List Price [®]
UGAH-18D	457 mm	220	1260	8 kg	₹142632
UGAH-24D	610 mm	220	1512	9 kg	148596
UGAH-30D	762 mm	220	1890	11 kg	180012
UGAH-36D	914 mm	220	2520	14 kg	185892
UGAH-42D	1067 mm	220	3360	15 kg	217560
UGAH-48D	1219 mm	220	3780	18 kg	223188
UGAH-54D	1372 mm	220	4536	19 kg	254184
UGAH-60D	1524 mm	220	5040	22 kg	260904
UGAH-66D	1676 mm	220	5040	23 kg	291564
UGAH-72D	1829 mm	220	6048	25 kg	300552

ALUMINUM DUAL CERAMIC STRIP HEATERS WITH LIGHTS – HIGH WATT

Model	Bulbs	Width	Voltage (Single Phase)	Watts	Approx. Ship Weight [○]	List Price [®]
UGAHL-18D	1	457 mm	220	1310	8 kg	₹149436
UGAHL-24D	2	610 mm	220	1612	7 kg	152292
UGAHL-30D	2	762 mm	220	1990	11 kg	189504
UGAHL-36D	3	914 mm	220	2670	12 kg	197736
UGAHL-42D	3	1067 mm	220	3510	15 kg	232512
UGAHL-48D	4	1219 mm	220	3980	16 kg	239988
UGAHL-54D	4	1372 mm	220	4736	20 kg	274512
UGAHL-60D	5	1524 mm	220	5290	22 kg	282408
UGAHL-66D	5	1676 mm	220	5290	23 kg	315504
UGAHL-72D	6	1829 mm	220	6348	26 kg	326676

[○] Does not include Remote Control Enclosure.

[®] Includes either attached control or Remote Control Enclosure with toggle switch(es) and indicator light(s).

● Units with lights will be supplied with Remote Control Enclosure or without switches.

All Ceramic Dual Models Feature:

Models Shipped with: Angle Brackets and Leads (914 mm Leads).


Dimensions with Attached Control Box, Toggle and Indicator Light (UGAH only): 457-1829 W x 479 D x 64 H mm.

Dimensions with Remote Control Enclosure (RMB), Toggle and Indicator Light: 457-1829 W x 381 D x 64 H mm.

OPTIONS – PAGE 59

REMOTE CONTROL ENCLOSURES (RMB) – PAGE 63

RECOMMENDED MOUNTING HEIGHTS – PAGE 64





UGAH-42D with standard 76 mm spacer. Remote Control Enclosure (RMB) recommended (not shown)

OPTIONS (available at time of purchase only)

Designer colors, aluminum models 457-1829 mm – Clear Anodized Standard – Non-standard colors are non-returnable –

COLOR-6	152 mm Housing for Single UGAH models (color selection below)					per 305 mm	₹2940
COLOR-9	229 mm Housing for Single UGAHL models (color selection below)					per 305 mm	2940
COLOR-15	381 mm Housings for Dual UGAH, UGAL, UGAHL models (color selection below)					per 305 mm	4200
RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green		

Gloss Finishes, aluminum models 457-1829 mm – Clear Anodized Standard – Non-standard colors are non-returnable –

GLOSS-6	152 mm Housing for Single UGAH models (finish selection below)	per 305 mm	₹4032		
GLOSS-9	229 mm Housing for Single UGAHL models (finish selection below)	per 305 mm	4032		
GLOSS-15	381 mm Housings for Dual UGAH, UGAHL (finish selection below)	per 305 mm	5376		
RRED	Radiant Red	GGRAY	Glossy Gray	BBLACK	Bold Black
GGOLD	Gleaming Gold	BBLUE	Brilliant Blue		

Designer colors, Remote Control Enclosures – Clear Anodized Standard – Non-standard colors are non-returnable –

RMB-COLOR	Remote Control Housing in <i>Designer</i> color (select color)						₹4200		
	RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue		COPPER	Antique Copper
	BLACK	Black	WHITE	White Granite	GREEN	Hunter Green			

Gloss Finishes, Remote Control Enclosures – Clear Anodized Standard – Non-standard colors are non-returnable –

RMB-GLOSS	Remote Control Housing in Gloss finish (select finish)					₹5964
	RRED	Radiant Red	GGRAY	Glossy Gray	BBLACK	Bold Black
	GGOLD	Gleaming Gold	BBLUE	Brilliant Blue		

LIGHTS-ADD'L Extra Lamps – Installed (max. two per 305 mm less one – one per 305 mm is standard) each ₹ 2940

UGA-NTL-14, -16 Non-Adjustable Tubular Stands (specify 356 or 406 mm clearance) pair 11004

UGA-NTL-18, -20 Non-Adjustable Tubular Stands (specify 457 or 508 mm clearance) pair 11676

UGA-NTL-22, -24 Non-Adjustable Tubular Stands (specify 559 or 610 mm clearance) pair 12600

UGA-NTL-18-D, -20-D Non-Adjustable Tubular Stands (specify 457 or 508 mm clearance) 2 pair ₹23352

UGA-NTL-22-D, -24-D, -26-D Non-Adjustable Tubular Stands (specify 559, 610 or 660 mm clearance) 2 pair 25200

NTL-PAINT Designer color or Gloss finish for Non-Adjustable Tubular Stands – Clear Anodized Standard – Non-standard colors are non-returnable – pair 4200

NTL-PAINT-D Designer color or Gloss finish for Non-Adjustable Tubular Stands – Clear Anodized Standard – Non-standard colors are non-returnable – 2 pair 8400

Extended Electrical Leads (Power) – Extend beyond standard 914 mm conduit (must specify lead length) –

HT-LEADS5 305-1524 mm Extended Electrical Leads ₹ 3444

HT-LEADS10 1829-3048 mm Extended Electrical Leads 6888

HT-LEADS15 3353-4572 mm Extended Electrical Leads 10332

HT-LEADS20 4877-6096 mm Extended Electrical Leads 13776

RMB-UGA Remote Control Enclosure with Toggle Control and Indicator No Charge

RMB-UGA-INF Remote Control Enclosure with Toggle Switch, Electronic Infinite Control, Relay, and Indicator Light – Designer colors and Gloss finishes available – Clear Anodized Standard – Non-standard colors are non-returnable – ₹40656

ACCESSORIES (available for purchase at any time)

Chef LED 230V adjustable bulb – bulbs must be rotated down –

UGAHL-xx, UGAHL-xxD models only, all voltages, pass through usage only –

UGAHL-xx must be 432 mm or higher from surface, UGAHL-xxD unit must be 456 mm or higher from surface –

All require pass-through usage only

CLED-3000-230 Similar to warm halogen **CLED-4000-230** Similar to cool fluorescent ₹11676

COLORS AND FINISHES – INSIDE BACK COVER

RMB-UGA-INF




CLED-3000 and -4000 Accessory



Glo-Ray® Infra-Black® Strip Heaters

For foodwarming at a close range to food product, the Glo-Ray® Infra-Black® heat technology is ideal, emitting a solid panel of uniform heat. Sturdy continuous single or dual aluminum housings assure quality, durability and a variety of widths, depths, mounting arrangements and colors to fit your operation.

- Provides ideal amount of heat for limited space operations, mounted 102 to 254 mm above target surface for singles and 203 to 356 mm for duals
- Long life metal sheathed heating elements
- Infra-Black emitter provides even heat distribution – eliminating hot spots
- Sturdy aluminum housings that do not sag, from 457 to 1829 mm in 152 mm increments

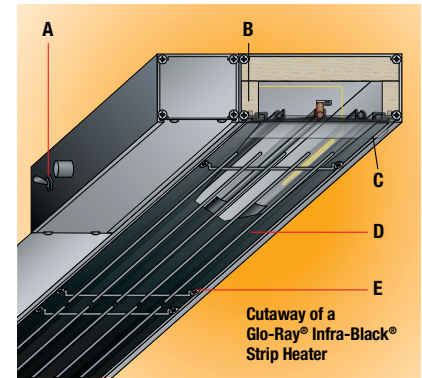

Cutaway of a Glo-Ray® Infra-Black® Strip Heater

- A** Thermostatically controlled to regulate heat and provide consistent temperature – optional Remote Control Enclosure (RMB) available
- B** Heavy-duty insulation minimizes heat loss
- C** Provides ideal amount of heat for limited space operations, effectively holding product
- D** Optional wire guard available to protect user from incidental contact with the heated surface
- E** Infra-black emitter provides even heat distribution, eliminating hot spots for close applications

GRAIH-36 with optional TCBI Control Box and wire guard



ALUMINUM INFRA-BLACK STRIP HEATERS – HIGH WATT (Must specify and add price of RMB or TCBI)

Model	Width	Voltage Single Phase	Watts	Approx. Ship Weight ^o	List Price ^o
GRAIH-18	457 mm	220	350	5 kg	₹49644 + RMB
GRAIH-24	610 mm	220	500	5 kg	52500 + RMB
GRAIH-30	762 mm	220	660	6 kg	55776 + RMB
GRAIH-36	914 mm	220	800	6 kg	59136 + RMB
GRAIH-42	1067 mm	220	950	7 kg	62580 + RMB
GRAIH-48	1219 mm	220	1100	7 kg	66108 + RMB
GRAIH-54	1372 mm	220	1250	8 kg	69552 + RMB
GRAIH-60	1524 mm	220	1400	9 kg	74004 + RMB
GRAIH-66	1676 mm	220	1560	10 kg	79884 + RMB
GRAIH-72	1829 mm	220	1725	15 kg	90636 + RMB

ALUMINUM DUAL INFRA-BLACK STRIP HEATERS – HIGH WATT (Must specify and add price of RMB or TCBI)

Model	Width	Voltage Single Phase	Watts	Approx. Ship Weight ^o	List Price ^o	
					76 mm Spacer	152 mm Spacer
GRAIH-18D	457 mm	220	700	8 kg	₹113820 + RMB	₹115080 + RMB
GRAIH-24D	610 mm	220	1000	10 kg	120372 + RMB	121632 + RMB
GRAIH-30D	762 mm	220	1320	10 kg	130200 + RMB	131964 + RMB
GRAIH-36D	914 mm	220	1600	13 kg	140196 + RMB	141960 + RMB
GRAIH-42D	1067 mm	220	1900	16 kg	150696 + RMB	152460 + RMB
GRAIH-48D	1219 mm	220	2200	17 kg	161196 + RMB	163548 + RMB
GRAIH-54D	1372 mm	220	2500	19 kg	171864 + RMB	174216 + RMB
GRAIH-60D	1524 mm	220	2800	21 kg	185724 + RMB	189336 + RMB
GRAIH-66D	1676 mm	220	3120	22 kg	201684 + RMB	205296 + RMB
GRAIH-72D	1829 mm	220	3450	23 kg	225624 + RMB	229236 + RMB

^o Does not include Remote Control Enclosure (RMB) or Thermostatic Control Box (TCBI). Must choose either RMB (see page 63) or TCBI (see Options on page 61).

• Does not include RMB.

All Infra-Black Models Feature:

Leads: 152 mm pigtail leads – server's right.

Dimensions: GRAIH: 457-1829 W x 152 D x 64 H mm.


GRAIH-xxD with 76 mm Spacer: 457-1829 W x 381 D x 64 H mm.

GRAIH-xxD with 152 mm Spacer: 457-1829 W x 457 D x 64 H mm.

Control Enclosure Dimensions (not including switches): 203 W x 76 D x 64 H mm.

Control Enclosure Location: Chef's left side (unless otherwise specified).

OPTIONS AND ACCESSORIES – PAGE 61





GRAIH-72 requires Remote Control Enclosure (RMB)

OPTIONS (available at time of purchase only)

Designer colors, aluminum models 457-1829 mm – Clear Anodized Standard – Non-standard colors are non-returnable –

COLOR-6		152 mm Housing for GRAIH models (color selection below)				per 305 mm		₹2940
COLOR-15, -18		381 mm and 457 mm Housings for GRAIH Dual models (color selection below)				per 305 mm		4200
RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper	
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green			

Gloss finishes, aluminum models 457-1829 mm – Clear Anodized Standard – Non-standard colors are non-returnable –

GLOSS-6	152 mm Housing for GRAIH models (finish selection below)				per 305 mm	₹4032
GLOSS-15, -18	381 mm and 457 mm Housings for GRAIH Dual models (finish selection below)				per 305 mm	5376
RRED	Radiant Red	GGRAY	Glossy Gray	BBLACK	Bold Black	
GGOLD	Gleaming Gold	BBLUE	Brilliant Blue			

TCBI	Thermostatic Control Box with Indicator Lights		19908
-------------	--	--	-------

Remote Control Enclosure – Available in Designer colors and Gloss finishes – Clear Anodized Standard – Non-standard colors are non-returnable –

AIH18WG -AIH72WG	Element Wire Guard (Dual models require two sets)	See page 63 for models and prices	
		per 305 mm (per side)	₹ 3024
AIH4NTL	102 mm Non-Adjustable Tubular Stands	pair	10248
AIH6NTL	152 mm Non-Adjustable Tubular Stands	pair	10248
AIH8NTL	203 mm Non-Adjustable Tubular Stands (Dual models require two pair)	pair	10248
AIH10NTL	254 mm Non-Adjustable Tubular Stands (Dual models require two pair)	pair	10248
AIH12NTL-D	305 mm Non-Adjustable Tubular Stands	2 pair	20496
AIH14NTL-D	356 mm Non-Adjustable Tubular Stands	2 pair	22008
NTL-PAINT	Designer color or Gloss finish for Non-Adjustable Tubular Stands – Clear Anodized Standard – Non-standard colors are non-returnable –	pair	4200
NTL-PAINT-D	Designer color or Gloss finish for Non-Adjustable Tubular Stands – Clear Anodized Standard – Non-standard colors are non-returnable –	2 pair	8400

Extended Electrical Leads (Power) – Extend beyond standard 152 mm pigtail leads (must specify lead length) –


HT-LEADS5	305-1524 mm Extended Electrical Leads	₹	3444
HT-LEADS10	1829-3048 mm Extended Electrical Leads		6888
HT-LEADS15	3353-4572 mm Extended Electrical Leads		10332
HT-LEADS20	4877-6096 mm Extended Electrical Leads		13776

ACCESSORIES (available for purchase at any time) – see page 62 for illustrations

ADJ ANGLE	60 mm Adjustable Angle Brackets for Single models	pair	₹2604
ADJ ANGLE7	178 mm tall Adjustable Angle Bracket for Single models	pair	3108
ADJ ANGLE-D	60 mm Adjustable Angle Brackets for Dual models	2 pair	5208
ADJ ANGLE7-D	178 mm tall Adjustable Angle Brackets for Dual models	2 pair	6216
CHAIN 1	Chain Suspension	per 305 mm	1260

COLORS AND FINISHES – INSIDE BACK COVER

Glo-Ray® Mounting Arrangements

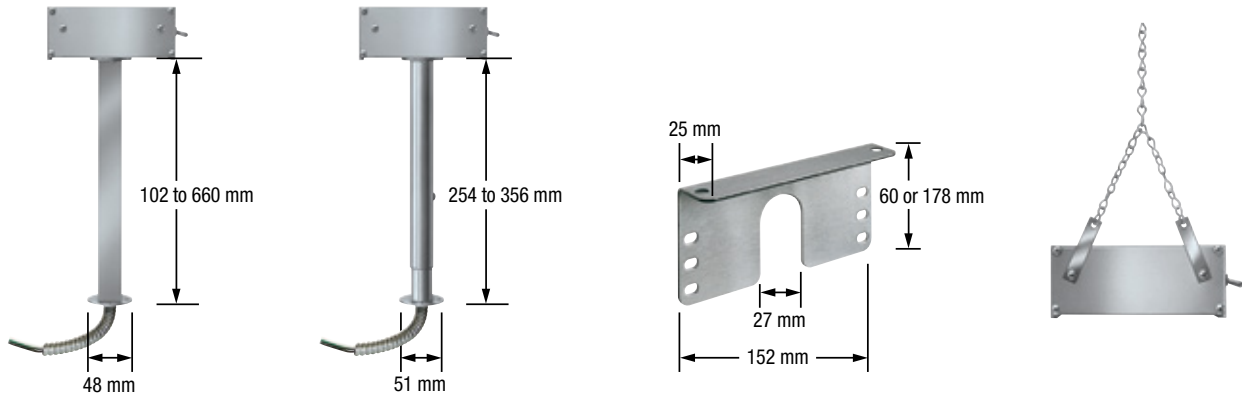

PERMANENT - FOR HARD WIRED INSTALLATION

Non-Adjustable Tubular Stands (NTL)

Sturdy stands conceal all supply wiring. Available in *Designer* colors. Duals require two pair. Specify bottom power location.

Adjustable Tubular Stands (ATL)


Sturdy tubular stands conceal all supply wiring. Duals require two pair. Specify bottom power location (not available on Ultra-Glo® models).

Angle Brackets (ANGLE)

Special adjustable angle brackets fit 152 or 229 mm housings for mounting Glo-Ray under a shelf. 60 mm Adjustable Angle Bracket provides 25-51 mm space while the 70 mm Adjustable Angle Bracket provides 25 - 152 mm space between Glo-Ray and overself. Duals require two pair (standard on Ultra-Glo models).

Chain Suspension (CHAIN)

Chains attach to tabs provided with warmers and are available in various lengths to suit the location (not available on Ultra-Glo models).

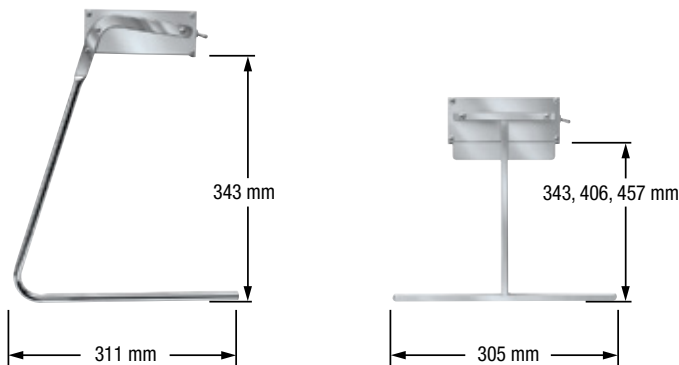

PORTABLE - FOR CORD AND PLUG INSTALLATION

C-Leg Stands (CL)

Attractive plated legs allow easy relocation of the warmer. For models 1829 mm or less in width (not available on Ultra-Glo models).

T-Leg Stands (TL)

Provide rigid stability and allow for more pass-through area below unit. For models 1829 mm or less in width (not available on Ultra-Glo models).

Remote Control Enclosures (RMB)

Hatco Remote Control Enclosures (RMB) are built with toggle or infinite switches, indicator lights and wiring, ready for installation when purchased with Glo-Ray® Strip Heaters.

- Built for toggle or infinite switches, indicator lights and wiring
- Threaded rubber boot for toggle switch is Standard
- One RMB per Strip Heater (except RMB2 units)



RMB-14
with infinite
controls



RMB-3 with
toggle switch and
indicator light



RMB-7 with toggle switch
and infinite control



RMB-7 with toggle switches
and optional *Designer Color*

REMOTE CONTROL ENCLOSURES (RMB)

Model	Description	Width	List Price
RMB-3	1 toggle switch	140 mm	₹15372
	2 toggle switches	140 mm	17304
	1 toggle switch, 1 indicator light	140 mm	17304
	1 infinite switch	140 mm	17304
RMB-7	3 toggle switches	229 mm	₹21420
	4 toggle switches	229 mm	25116
	2 toggle switches, 2 indicator lights	229 mm	22932
	1 toggle switch, 1 infinite switch	229 mm	21168
	1 toggle switch, 1 infinite switch 1 indicator light	229 mm	23184
	2 infinite switches	229 mm	23184
	1 infinite switch, 1 indicator light	229 mm	20748
RMB-14	5 toggle switches	356 mm	₹31752
	6 toggle switches	356 mm	37380
	2 toggle switches, 2 infinite switches	356 mm	32844
	1 toggle switch, 2 infinite switches	356 mm	28728
	4 infinite switches	356 mm	36960
RMB2-1R	2 infinite switches, 2 indicator lights	356 mm	29652
	1 toggle, 1 infinite, 1 relay, 1 indicator	280 mm	₹79212

All Models Feature:

Voltage: 220.

Ship Weight: 1-3 kg depending on components.

Max. Allowable Amperage per Switch: Toggle: 15.0

Infinite: 12.2

RMB2-1R: 16 or 20

Dimensions (not including switches): 140, 229, 356 or 406 W x 76 D x 64 H mm.

RMB2-1R: 280 W x 115 D x 140 H mm.

RMB2-1R Cutout Dimensions: 258 W x 121 H mm.

Toggle Switch: Max. 15 Amps
Infinite Switch: Max. 12.2 Amps

Remote Control Enclosures (RMB):
When used, no more than one RMB per Strip heater and no more than one Strip Heater per RMB (except RMB2 units).

Need help choosing the correct RMB?
"Choose Remote Box (RMB)" can be found on:
www.hatcocorp.com
under "Resources"

Strip Heaters

OPTIONS (available at time of purchase only)

Designer Colors – (not available for RMB2-1R) – Clear Anodized Standard – Non-standard colors are non-returnable –

RMB-COLOR	Remote Control Enclosure Housing in <i>Designer Color</i>				₹4200
RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green
				COPPER	Antique Copper


Gloss Finishes – (not available for RMB2-1R) – Clear Anodized Standard – Non-standard colors are non-returnable –

RMB-GLOSS	Remote Control Enclosure Housing in Gloss Finish				₹5964
RRED	Radiant Red	GGRAY	Glossy Gray	BBLACK	Bold Black
GGOLD	Gleaming Gold	BBLUE	Brilliant Blue		

COLORS AND FINISHES – INSIDE BACK COVER

Strip Heater Recommended Range Above Target* and Spacing Requirements (Based on 610 mm Foodwarmer)

Glo-Ray® Infrared Heating Element (Recommended range above target)

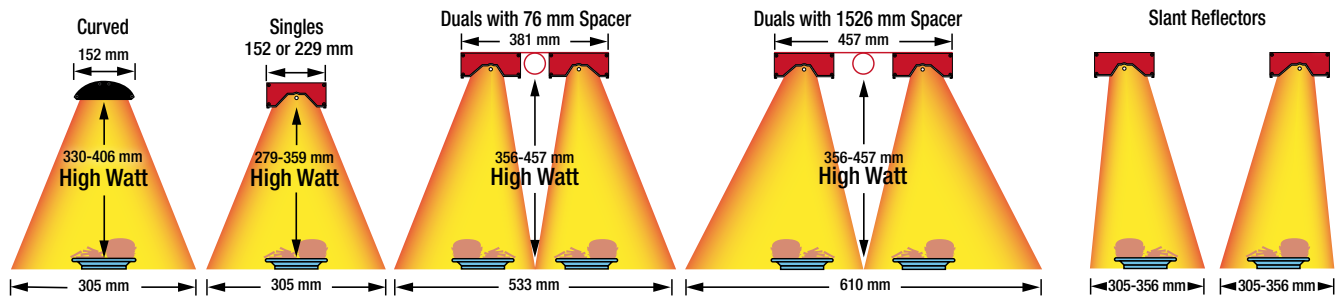

GLO-RAY® INFRARED HEATING ELEMENT

Curved High Watt (GM5AH, GM5AHL)

Non-combustible surroundings only. Install 25 mm from overself and minimum of 254 mm above a non-combustible countertop surface (back of wall: no requirement).

Singles (GRH, GRAH, GRAHL) –


Combustibles: 343 mm below, 25 mm above and 76 mm to back wall. Non-combustibles: 25 mm above, 254 mm below with infinite or indicator lamp and 203 mm below toggle. Must be installed in a pass-through area. Units with remote switches may be installed against a non-combustible back wall, flush to an overself and 203 mm to a surface below. Maximum 254 mm setback from the front of an overself. Models with cords must be installed 76 mm below an overself and 297 mm over a surface below.

Duals (GRAH-D, GRAHL-D) –

May not be installed in combustible surroundings. Non-combustibles: 25 mm above, 254 mm below. Must be installed in a pass-through area. Units with remote switches may be installed 76 mm from a non-combustible back wall, 203 mm to surface below and flush to an overself. Maximum 254 mm setback from the front of an overself.

Slant Reflectors: Optional slant reflectors are available to direct the heat pattern front or back.

Ultra-Glo® Heating Element (Recommended range above target)

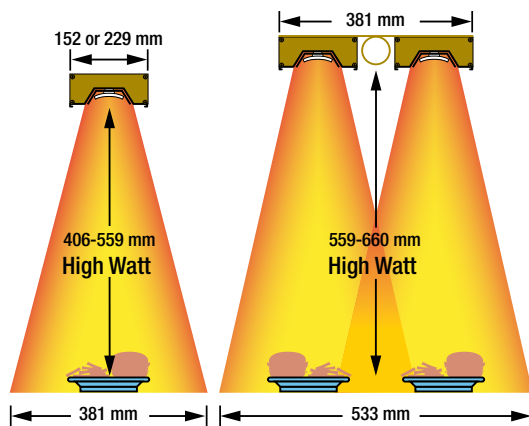


ULTRA-GLO®

Singles and Duals: (UGAH, UGAHL, UGAH-D, UGAHL-D) – May not be installed in combustible surroundings. Non-combustibles: 25 mm above, 432 mm from a surface below and 76 mm from a back wall.

Dual Mounting: Do not mount warmers side by side (dual mounting) with less than a 76 mm space between units.

Infra-Black® Heating Element (Recommended range above target)

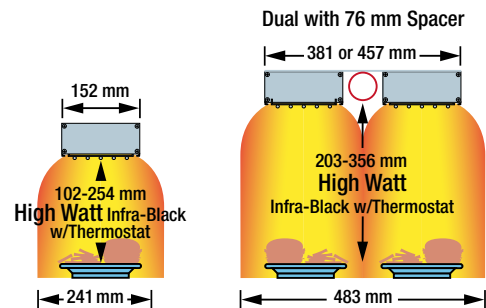

GLO-RAY® INFRA-BLACK®

(GRAIH, GRAIH-D) –

May not be installed in combustible surroundings. Non-combustibles: 25 mm above and 102 mm below. Must be installed in a pass-through area. Units with remote switches may be installed 76 mm from a non-combustible back wall and flush to an overself. Maximum 254 mm setback from the front of an overself.

Remote Control Enclosures: When used, no more than one RMB per strip heater and no more than one strip heater per RMB.

DEPTH OF HEAT PATTERN AT RECOMMENDED ELEMENT HEIGHT

* Recommended single unit application without base heat, based on ideal conditions. Individual applications may vary, consult factory.

Fry Stations



Portable Foodwarmers

Opt for the versatility of Hatco's GLOMAX®, Glo-Ray® and Ultra-Glo® Portable Foodwarmers. With heat from above, below or both, these foodwarmers offer design flexibility without sacrificing food product quality. Ideal for use next to fry stations, drive-through windows and service areas that require frequent and easy access.

- Portable – ready to plug in and use
- Versatile – available in many sizes, styles and heat sources to fit your needs
- Flexible – both top and bottom heat available
- Available with incandescent bulbs containing special protective coating to guard against food contamination
- Toggle switch is standard; infinite switch optional on GRFF series
- All base heat units (GR-B, GRFFB and UGFFB) have a preset automatic thermostat to maintain consistent temperatures
- GMFFL, GRFF, GRFFL, UGFF, UGFFL provide top heat only
- Ceramic heating elements provide more distance between the heat source and the holding pan (UGFF series only)



GR-B Heated Base with accessory sheet pan

GRFFB with optional infinite switch and accessory food pans



GMFFL in standard Designer Black and accessory food pan



GLOMAX® PORTABLE FOODWARMER WITH METAL SHEATHED ELEMENTS

Model	Dimensions (W x D x H)	Voltage (Single Phase)	Watts	Approx. Ship Weight	List Price
GMFFL	329 x 644 x 445 mm	230	610	7 kg	₹32004

All Metal Sheathed Models Feature:

Model Shipped with: 1829 mm cord and plug, base front sign holder, and clear plastic insert for sign holder.

Cord Location: Back, upper middle.

GLO-RAY® PORTABLE FOODWARMERS WITH METAL SHEATHED ELEMENTS

Model	Dimensions (W x D x H)	Voltage (Single Phase)	Watts	Approx. Ship Weight	List Price
GR-B	324 x 559 x 57 mm	220	210	7 kg	₹ 62160
GRFF	314 x 610 x 400 mm	220	500	7 kg	61404
GRFFL	314 x 610 x 400 mm	220	600	7 kg	78708
GRFFB [☞]	324 x 610 x 406-508 mm	220	710	13 kg	100464
GRFFBL [☞]	324 x 610 x 406-508 mm	220	810	14 kg	115332

☞ Standard clearance is 356 mm. Specify 306 or 406 mm if required.

All Metal Sheathed Models Feature:

Models Shipped with: 1829 mm cord and plug.

Cord Location: GR-B, GRFFB, GRFFBL: Back, lower middle.

GRFF, GRFFL: Back, upper middle.

OPTIONS AND ACCESSORIES – PAGE 67

ULTRA-GLO® PORTABLE FOODWARMERS WITH CERAMIC ELEMENTS

Model	Dimensions (W x D x H)	Voltage (Single Phase)	Watts	Approx. Ship Weight	List Price
UGFF	314 x 565 x 479 mm	220	630	7 kg	₹ 76692
UGFFL	314 x 565 x 479 mm	220	730	8 kg	94416
UGFFB	324 x 572 x 559 mm	220	840	12 kg	115080
UGFFBL	324 x 572 x 559 mm	220	940	13 kg	133224

All Ceramic Portable Models Feature:

Models Shipped with: 1829 mm cord and plug.

Cord Location: UGFF, UGFFL: Back, upper middle.

UGFFB, UGFFBL: Back, lower middle.

OPTIONS AND ACCESSORIES – PAGE 67

GR = Glo-Ray
GM = GLOMAX
UG = Ultra-Glo
French Fry

x x F F B L

L = Incandescent Light
No Character = No Light
B = Base Heat
No Character = No Base Heat



UGFFB with accessory food pan (perforated pan not available)

OPTIONS (available at time of purchase only) (excludes GMFFL)

Designer Colors (one color per unit, heated base is not painted, excludes GR-B models)

Non-standard colors are non-returnable – Clear Anodized standard –

RED	Warm Red	₹13776
BLACK	Black	13776
GRAY	Gray Granite	13776
WHITE	White Granite	13776
NAVY	Navy Blue	13776
GREEN	Hunter Green	13776
COPPER	Antique Copper	13776

Gloss Finishes (one color per unit, heated base is not painted, excludes GR-B models)

Non-standard colors are non-returnable –

RRED	Radiant Red	₹19068
GGOLD	Gleaming Gold	19068
GGRAY	Glossy Gray	19068
BBLUE	Brilliant Blue	19068
BBLACK	Bold Black	19068

Clearance – from bottom of Glo-Ray to top of heated surface (GRFFB, GRFFBL only) – 356 mm standard

305 mm	No Charge
406 mm	No Charge
SIGN HOLD	Sign Holder for GRFFL Model with Back Toggle only (requires 229 W x 140 H x 2 D mm sign, which is not included and adds 76 mm to height of unit) ₹4284
INF	Infinite Control 4284 (not available on models GR-B, GMFFL, UGFF, UGFFL, UGFFB or UGFFBL)

ACCESSORIES (available for purchase at any time)

5PLTBOX	Five-Pleat Hardcoated French Fry Box Ribbon – 489 W x 235 D x 51 H mm	₹21000
8PLTBAG	Eight-Pleat Hardcoated French Fry Bag Ribbon – 489 W x 235 D x 51 H mm	21000
Chef LED 230V adjustable bulb – bulbs must be rotated down – excludes any model without existing bulbs –		
CLED-3000-230	Similar to warm Halogen light	each ₹11676
CLED-4000-230	Similar to cool Fluorescent light	

FRY RIBBONS – PAGE 69

FOOD PANS AND TRIVETS – PAGE 155

COLORS AND FINISHES – INSIDE BACK COVER



CLED-3000 and -4000
Accessory

Glo-Ray® Fry Stations

Hatco offers convenient Glo-Ray® Fry Stations that can be placed where they are most needed – next to a fryer! Glo-Ray heat technology offers the ability to keep fried foods at optimum temperatures, ready to serve, without cooking or drying them out.

- Various hardcoated fry ribbons stage boxed or bagged products for quick-service areas
- Thermostatically-controlled heated base maintains uniform holding temperatures from below (GRFHS series)
- Portable models including pass-through style (GRFHS series)
- Ceramic elements and slotted holding bin prevent soggy product (GRFHS series)
- Accessory hardcoated fry ribbons absorb more radiant heat than stainless steel and can be up to 8° to 11°C hotter (GRFHS series)
- Sectional divider permits holding of multiple products simultaneously (GRFHS series)
- Built-in top heat source features a swing-away post mount (GRFSC, GRFS series)
- Fry Station Warmers (GRFSC, GRFS series) feature a built-in top heat source and a swing-away post mount
- A variety of clearances are offered (GRFS series)
- GRFS series has power toggle switch, cord and plug, plus optional infinite control

GRFHS-21 with optional right-hand cutout for fry basket and accessory fry ribbon (left-hand cutout also available)



GRFHS-16



GRFHS-PTT21


GRFSC-18
Swing-away
post mount

PORTABLE FRY HOLDING STATIONS

Model	Bulbs	Dimensions W x D x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
GRFHS-16 [↔]	2	416 x 583 x 576 mm	220	1057	24 kg	₹309792
GRFHS-21 [↔]	2	543 x 721 x 576 mm	220	1218	29 kg	341460
GRFHS-26 [↔]	2	670 x 594 x 562 mm	220	1243	30 kg	349608
GRFHS-PT26 [♣]	2	747 x 577 x 625 mm	220	1233	29 kg	349608
GRFHS-PT26 [♣]	2	747 x 577 x 678 mm	220	1233	29 kg	362460
GRFHS-PTT21 [↔]	2	630 x 965 x 572 mm	220	1486	46 kg	355488

[↔] Add 43 mm to width if ordering Scoop Holder.

[♣] Includes a built-in 152 mm deep heated food holding base (102 mm is standard on all other models).

[♠] Scoop Holder standard.

All Fry Holding Station Models Feature:

Models Shipped with: One slotted holding bin and one sectional divider.

Cord Location: GRFHS-16, -21, -26, -PT26: Back side, lower right corner.

GRFHS-PTT21: Lower right-hand side.

FRY STATION WARMERS

Model	Bulbs	Dimensions W x D x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
GRFSC-18 [♣]	—	152 x 457 x 489-572 mm	220	630	5 kg	₹66612
GRFSL-18 [♣]	2	229 x 457 x 489-572 mm	220	730	6 kg	80052
GRFSCR-18 [♣]	—	152 x 457 x 489-572 mm	220	630	5 kg	66696
GRFSLR-18 [♣]	2	229 x 457 x 489-572 mm	220	730	6 kg	80052
GRFS-24 [♣]	—	152 x 610 x 318-394 mm	220	500	5 kg	54264
GRFSL-24 [♣]	2	229 x 610 x 318-394 mm	220	600	6 kg	68628
GRFSR-24 [♣]	—	152 x 610 x 318-394 mm	220	500	5 kg	54264
GRFSLR-24 [♣]	2	229 x 610 x 318-394 mm	220	600	6 kg	68628

[♣] Specify clearance of 305, 425, 457 (standard) or 508 mm when ordering.

[♠] Fry Station Warmer without cord and plug. Supply wires through mounting post.

[♣] Specify clearance of 254, 279, 305 or 330 mm (standard) when ordering.


All Fry Station Warmer Models Feature:

Toggle Switch Location: Ceramic Heating Element Models: Back of unit.

Metal Sheathed Heating Element Models: Front of unit.



Cord Location GRFS-24 and GRFSL-24: Back, upper middle.


GRFSC-18 and GRFSL-18: Back, right-hand side.




GRFS, GRFSL, GRFSC,
GRFSL with swing-away
post mount and cord
with plug

OPTIONS AND ACCESSORIES – PAGE 69

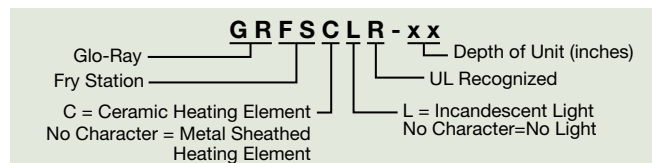

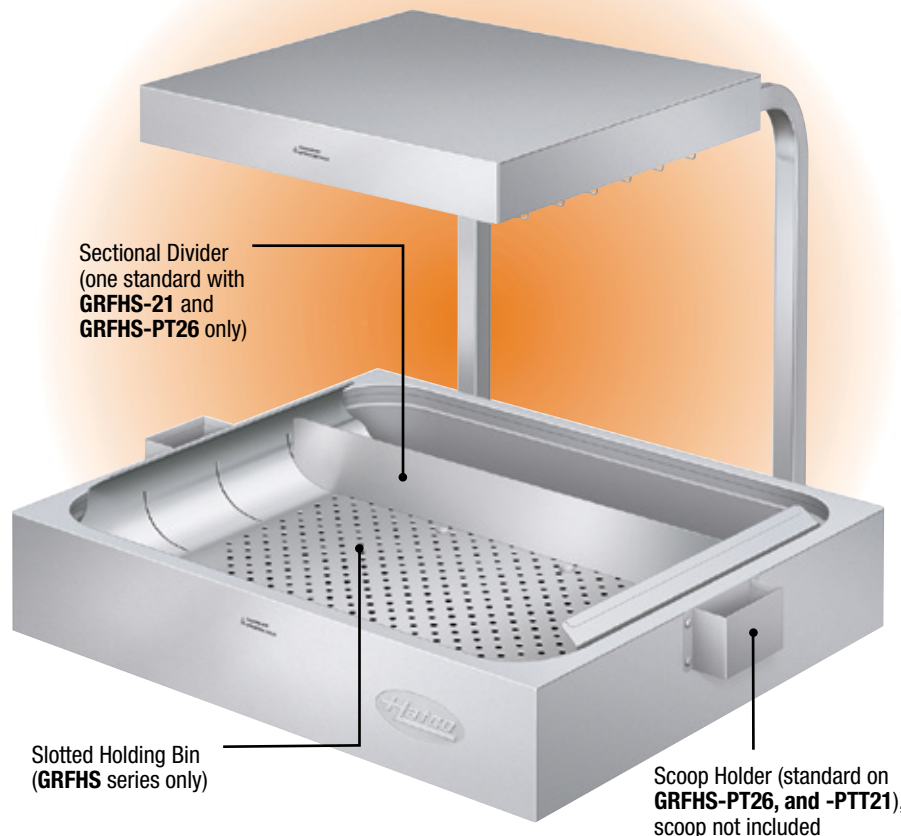

FHS4BOX



FHS5BAG



FHS5BOX



FHS6BAG



FHS6BB



FHS7BAG



PTT16-10BAG

Fry Stations

OPTIONS (available at time of purchase only)

FHS-CUT	Right- or Left-Hand Cutout for Fry Basket (must specify side at time of order) Adds 43 mm to width of unit (GRFHS-16, -21, -26 models only)	No Charge
INF	Infinite Control (metal sheathed GRFS models only)	₹4284

ACCESSORIES (available for purchase at any time)

FHS4BOX	Four-Pleat Hardcoated Fry Box Ribbon (GRFHS-16 & -26) – 273 W x 127 D x 44 H mm	₹ 8064
FHS5BAG	Five-Pleat Hardcoated Fry Bag Ribbon (GRFHS-16 & -26) – 286 W x 127 D x 48 H mm	8064
FHS5BOX	Five-Pleat Hardcoated Fry Box Ribbon (GRFHS-21) – 445 W x 127 D x 48 H mm	13104
FHS6BAG	Six-Pleat Hardcoated Fry Bag Ribbon (GRFHS-21, -PT26, & -PTT21) – 349 W x 127 D x 51 H mm	8820
FHS6BB	Six-Pleat Hardcoated Fry Box/Bag Ribbon (GRFHS-21, -PT26, & -PTT21) – 438 W x 127 D x 44 H	13104
FHS7BAG	Seven-Pleat Hardcoated Fry Bag Ribbon (GRFHS-21) – 454 W x 127 D x 48 H mm	13104
PTT16-10BAG	Ten-Pleat Hardcoated Hashbrown Ribbon – (GRFHS-PT26 & -PTT21) – 381 W x 98 D x 44 H mm	12348
5BH	127 mm Side-by-Side Bag Holder (GRFHS-21)	5376
FHS-SH	Scoop Holder (adds 32 mm to width of unit) – one standard on GRFHS-PT26, -PTT21 models	5376
FHSDIV1	Sectional Dividers – 407 W x 83 H mm (GRFHS-16, -26 models)	3192


Chef LED 230V adjustable bulb – bulbs must be rotated down –

CLED-3000-230 Similar to warm Halogen light **CLED-4000-230** Similar to cool Fluorescent light each 11676

FOOD PANS AND TRIVETS – PAGE 155



CLED-3000 and -4000
Accessory



FHS-SH

Carving Stations



Decorative Carving Stations

An eye-catching solution for carving and serving, the Hatco Decorative Carving Station features a stylish Decorative Lamp and is available in multiple configurations, including post mount, counter mount, and freestanding models with an integrated heated simulated stone base. Designed to deliver both visual appeal and reliable performance, these stations are ideal for chefserved presentations in restaurants, hotels, country clubs, casinos, and catered events.

- Available as freestanding (DCSB2 models) with a round or rectangular heated simulated stone base, post mount (DCS400-1 models), or counter mount (DCS400-1CM models)
- Patented telescoping heated Decorative Lamp(s) has a 30° shade pivot
- DCSB2 models include a thermostatically controlled heated base and matching cutting board, both made of foodsafe materials

- DCSB2 models feature a removable sneeze guard
- DCS400-1 models include a 40 lb. weighted base for stability
- DCS400-1CM models are designed to be mounted to a countertop
- Models with simulated stone are Swanstone®

DCS400-1CM
with optional Plated finish
Antique Bronze post & shade and optional Ice simulated stone trim ring



DCSB2-R24-1
with standard
Plated finish
Bright Nickel
post & shade and
standard Ash Gray
simulated stone
heated base



DCSB2-3624-2
with optional Plated finish
Bright Copper post & shade and
optional Birch simulated stone
heated base

DCS400-1
with standard
Plated finish
Bright Nickel
post & shade
and standard
Ash Gray
simulated stone
post base



DECORATIVE CARVING STATIONS

Model	No. of Lamps	Width	Heated Base Surface Area	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
DCS400-1	1	203 mm	—	220-240	210-250	15 kg	₹152880
DCS400-1CM	1	156 mm	—	220-240	210-250	9 kg	149856
DCSB2-R24-1	1	660 mm	610 mm diameter	230	580	34 kg	400596
DCSB2-2420-1	1	610 mm	610 W x 508 D mm	230	730	38 kg	476112
DCSB2-3624-2	2	914 mm	914 W x 610 D mm	230	1259	60 kg	626304

All Decorative Carving Station Models Feature:

Models Ship with: DCS400-1, -1CM: One clear coated bulb. DCS400-1 includes black base.

DCSB2-R24-1, -2420-1: One clear coated bulb, base heat, glass sneeze guard and cutting board.

DCSB2-3624-2: Two clear coated bulbs, base heat, glass sneeze guard and cutting board.

Telescoping Clearance: DCS400-1, -1CM: (bottom of shade to counter) 356 - 711 mm.

DCSB2-R24-1, -2420-1, -3624-2: (bottom of shade to top of cutting board) 356 - 660 mm.

Cord Location: DCS400-1: Base of unit, server side center. DCS400-1CM: Under counter.

DCSB2-R24-1, -2420-1, -3624-2: Base of unit, server side on left.

OPTIONS (available at time of purchase only)

Shade and post(s) in Plated finish, no additional charge –

Non-standard colors are non-returnable – Bright Nickel Standard –

BBRASS	Bright Brass	No Charge
BCOPPER	Bright Copper	No Charge
ABRASS	Antique Brass	No Charge
ABRONZE	Antique Bronze	No Charge

Base and Cutting Board in simulated stone, (except DCS400-1, -1CM),

no additional charge – Non-standard colors are non-returnable –

Ash Gray Standard –

SS-BIRCH	Birch	No Charge
SS-ICE	Ice	No Charge

Trim Ring (DCS400-1CM only) in simulated stone, no additional charge –

Non-standard colors are non-returnable – Ash Gray Standard –

SS-BIRCH	Birch	No Charge
SS-ICE	Ice	No Charge

Post Base (DCS400-1 only) in simulated stone, no additional charge –

Non-standard colors are non-returnable – Ash Gray Standard –

SS-BIRCH	Birch	No Charge
SS-ICE	Ice	No Charge

COLORS AND FINISHES - INSIDE BACK COVER



Close-up of Trim Ring
in standard Ash Gray (Unit
shown in optional Plated
finish Antique Bronze)

DCSB2xxx-xx-xx-xCM

Decorative Carving Station	No Character = Freestanding
B2 = Heated Base	CM = Countertop Mount
No Character = No Base Heat	
Shade Style Number	Quantity Overhead Heat Lamps
Width of Heated Base (inches)	Depth of Heated Base (inches) (Diameter for Round Heated Base)
(R = Round Heated Base)	

Glo-Ray® Carving Stations

An excellent addition to extend food holding times during serving periods is the Glo-Ray® Carving Station. Create a complete serving station for buffets by adding it to Hatco's Flav-R-Savor® Holding Cabinet.

- Overhead ceramic heating elements project high intensity radiant heat over entire target area
- Adjustable clearance of 445 to 570 mm
- Portable – includes a 1829 mm cord and plug
- Shatter-resistant incandescent lights illuminate holding area
- Drip pan and cutting board available
- GRCSCLH has base heat



GRCSCL-24 with accessory left-hand sneeze guard, drip pan and cutting board



GRCSCLH-24 with accessory left-hand sneeze guard, drip pan and cutting board



GRCSCLH-24 controls

CARVING STATIONS WITH CERAMIC ELEMENTS

Model	Dimensions W* x D x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
GRCSCL-24	660 x 711 x 572-724 mm	220	1137	25 kg	₹344736
GRCSCLH-24	660 x 711 x 572-724 mm	220	1438	25 kg	389004

* Width includes accessory left-hand sneeze guard.

All Carving Station Models Feature:

Models Shipped with: Right-hand sneeze guard.


Cord Location: Back side on base.

ACCESSORIES (available for purchase at any time)

CSCLB/PACC	Left-Hand Sneeze Guard Kit (1 kg)	₹25956
CSCL-PAN	Stainless Steel Custom Drip Pan 508 x 679 x 25 mm (4 kg)	26796
CSCL-BOARD	NSF Approved Cutting Board – 457 x 610 x 44 mm (9 kg)	25284
Chef LED 230V adjustable bulb – bulbs must be rotated down –		each ₹11676
CLED-3000-230	Similar to warm Halogen light	
CLED-4000-230	Similar to cool Fluorescent light	



CSCLB/PACC




CSCL-PAN



CSCL-BOARD



CLED-3000 and -4000
Accessory

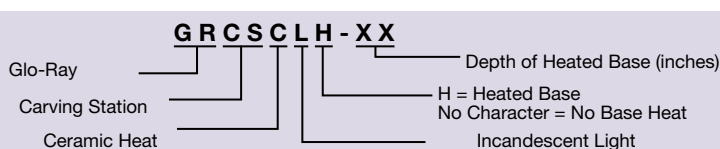

Portables



Glo-Ray® Portable Round Heated Shelves

The contemporary-styled Round Heated Shelf keeps hot food at serving temperatures. Ideal when used for wrapped product or for use behind a sneeze guard with unwrapped food like pizza, biscuits, muffins and cookies.

- Unit is designed for countertop or built-in use – see cutout dimensions below
- Uniform heat distribution with blanket-type element
- Thermostatically-controlled heated base
- Available in three sizes to hold standard 381, 432 or 483 mm diameter pans
- Lighted power switch with cord and plug attached
- Optional stainless steel trim



GRSR-17 with optional Navy Blue *Designer* color and accessory food pan



GRSR-19 with optional Hunter Green *Designer* color and accessory pizza pan

PORTABLE ROUND HEATED SHELVES

Model®	Dimensions Dia. x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
GRSR-15	425 x 98 mm	220	210	8 kg	₹ 92064
GRSR-17	476 x 98 mm	220	273	9 kg	96852
GRSR-19	527 x 98 mm	220	336	10 kg	102564

® When no color is specified, unit will be black.

All Round Heated Shelf Models Feature:

Maximum Pan Size: GRSR-15 = 381 mm diameter

GRSR-17 = 432 mm diameter

GRSR-19 = 483 mm diameter

Cord Location: Underneath.

PORTABLE ROUND HEATED SHELVES COUNTERTOP CUTOUT DIMENSIONS (For Built-In Applications)


Model	Minimum Diameter	Maximum Diameter	Below Counter
GRSR-15	410 mm	413 mm	137 mm
GRSR-17	460 mm	464 mm	137 mm
GRSR-19	511 mm	514 mm	137 mm

OPTIONS (available at time of purchase only)

SS SIDE	Stainless Steel Side	No Charge
Designer colors – Non-standard colors are non-returnable – Black Standard –		
RED	Warm Red	No Charge
GRAY	Gray Granite	No Charge
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge

FOOD PANS AND TRIVETS – PAGE 155

COLORS AND FINISHES – INSIDE BACK COVER



Glo-Ray® Portable Round Heated Simulated Stone Shelves

Hatco's Glo-Ray® Portable Heated Simulated Stone Shelves are made of foodsafe materials and come in three simulated stone colors. These unique warmers will safely hold food hot while blending in with your décor and are ideal for buffet lines or as hors d'oeuvre displays.

- Shelves are made of approved foodsafe materials
- Features a lighted rocker switch, cord & plug and thermostatically-controlled heat base to help hold your food hot and delicious
- Optional 76 or 127 mm Risers available in stainless steel (standard) or *Designer* colors
- Models with simulated stone are Swanstone®

GRSSR-18 with standard Ash Gray simulated stone heated base and optional 127 mm riser in optional *Designer* Warm Red



GRSSR-16 with standard Ash Gray simulated stone heated base and optional 76 mm riser in optional *Designer* Gray Granite

GRSSR20-DL77516 with optional Ice simulated stone heated base and standard *Designer* Black Decorative Lamp



GRSSR-20 with standard Ash Gray simulated stone heated base

PORTABLE ROUND HEATED SIMULATED STONE SHELVES

Model	Dimensions Dia. x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
GRSSR-16	406 x 67 mm	220	190	6 kg	₹116340
GRSSR-18	457 x 67 mm	220	265	7 kg	124068
GRSSR-20	508 x 67 mm	220	330	8 kg	131796

All Round Heated Simulated Stone Shelf Models Feature:

Temperature Range: 38°-93°C.

Cord Location: Back side on base.

PORTABLE ROUND HEATED SIMULATED STONE SHELF WITH DECORATIVE LAMP

Model	Dimensions W x D x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
GRSSR20-DL77516	508 x 572 x 914 mm	220-230	550-600	15 kg	₹184632

All Round Heated Simulated Stone Shelf Models with Decorative Lamp Feature:



Bulb: One, 250 Watt clear bulb, uncoated.

Temperature Range: 38°-93°C.

Cord Location: Back side on base.

Lamp Distance: 415 mm space from bottom of shade to base.

OPTIONS AND ACCESSORIES – PAGE 76

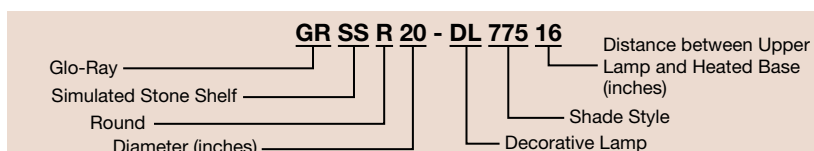



Two **GRSSR20-DL77516** units with standard Ash Gray simulated stone heated base and Designer Black Decorative Lamp

OPTIONS *(available at time of purchase only)*

Designer color Base (and Lamp for GRSSRxx-DL77516 models) – Non-Standard colors are non-returnable – Black Standard –

RED	Warm Red	No Charge
GRAY	Gray Granite	No Charge
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge

Simulated stone colors – Non-standard colors are non-returnable – Ash Gray Standard –

SS-BIRCH	Birch	No Charge
SS-ICE	Ice	No Charge

76 mm Risers – Available in Designer colors and Stainless Steel (not available on the GRSSR20-DL77516) –

Non-standard colors are non-returnable –

3RISER16	GRSSR-16	₹5880
3RISER18	GRSSR-18	5880
3RISER20	GRSSR-20	5880

127 mm Risers – Available in Designer colors and Stainless Steel (not available on the GRSSR20-DL77516) –

Non-standard colors are non-returnable –

5RISER16	GRSSR-16	₹7560
5RISER18	GRSSR-18	7560
5RISER20	GRSSR-20	7560

ACCESSORIES *(available for purchase at any time)*

WHITE-CTD-240	250 Watt, 240V, Clear Bulb, Coated (GRSSR20-DL77516 accommodates one bulb)	₹6972
----------------------	--	--------------

COLORS AND FINISHES – INSIDE BACK COVER

Glo-Ray® Portable Rectangular Heated Simulated Stone Shelves

Match the heat zone to your countertops with Hatco's Glo-Ray® Portable Rectangular Heated Simulated Stone Shelves. The portable foodsafe shelves are ideal for buffet lines or as hors d'oeuvre displays and will safely hold food hot while blending in with your décor.

- Hatco Heated Simulated Stone Shelves are made of approved foodsafe materials
- Features a lighted rocker switch, cord & plug and thermostatically-controlled heated base to help hold your food hot and delicious
- Models with simulated stone are Swanstone® and Dekton®



GRSS-3618 in optional Birch simulated stone (view of base)



GRSS-3618 in optional Rem simulated stone

PORTABLE RECTANGULAR HEATED SIMULATED STONE SHELVES

Model	Dimensions W x D x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
GRSS-2418	606 x 454 x 66 mm	220	534	13 kg	₹173208
GRSS-3018	759 x 454 x 66 mm	220	655	14 kg	181272
GRSS-3618	911 x 454 x 66 mm	220	782	16 kg	189000
GRSS-4818 [‡]	1216 x 454 x 157 mm	220	1068	21 kg	204960
GRSS-6018 [‡]	1521 x 454 x 157 mm	220	1310	26 kg	267288
GRSS-7218 [‡]	1826 x 454 x 157 mm	220	1564	31 kg	282492

[‡] Height includes standard 102 mm legs.

All Glo-Ray Portable Rectangular Heated Simulated Stone Shelf Models Feature:
Cord Location: center of side with switch.

OPTIONS (available at time of purchase only)

Simulated stone color – Non-standard colors are non-returnable – Ash Gray Standard –

SS-BIRCH	Birch	No Charge
SS-ICE	Ice	No Charge

Dekton® Stone Colors – All Dekton surfaces are non-returnable –

GRSS-2418 – Rectangular Heated Shelves –

DOMOOS	Domoos	₹60564
REM	Rem	60564
SOKE	Soke	60564

GRSS-3018 – Rectangular Heated Shelves –

DOMOOS	Domoos	₹ 70728
REM	Rem	70728
SOKE	Soke	70728

GRSS-3618 – Rectangular Heated Shelves –

DOMOOS	Domoos	₹ 87444
REM	Rem	87444
SOKE	Soke	87444

GRSS-4818 – Rectangular Heated Shelves –

DOMOOS	Domoos	₹ 95592
REM	Rem	95592
SOKE	Soke	95592

GRSS-6018 – Rectangular Heated Shelves –

DOMOOS	Domoos	₹ 115164
REM	Rem	115164
SOKE	Soke	115164

GRSS-7218 – Rectangular Heated Shelves –

DOMOOS	Domoos	₹ 134820
REM	Rem	134820
SOKE	Soke	134820


COLORS AND FINISHES – INSIDE BACK COVER

Dekton stone surfaces that are available for these models:


Domoos




Rem



Soke



Note: Due to the natural texture, patterns may vary.



Portable Rectangular Heated Base Glass Shelves

The Hatco Heated Base Glass Shelf has a heated ceramic glass surface to create uniform heat across the entire surface and is made of approved foodsafe material. Adjustable thermostatic controls allow surface temperature ranging from 38° to 90°C to be easily controlled.

- Lighted On/Off rocker switch
- Equipped with a trim mounting ring that is available in stainless steel (standard), White or *Designer Black*
- All units come with a 1829 mm cord and plug


HBG-2418


HBG-FS-24 Black angled Food Stop (detail view) with **HBG-TRIM-BLK** optional *Designer* Black trim ring



HBG-2418 in Standard Black Glass and Stainless Steel trim ring



HBG-2418 with optional White Glass, Frame and Trim Ring

PORTABLE RECTANGULAR HEATED BASE GLASS SHELVES

Model	Dimensions W x D x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
HBG-2418	619 x 467 x 64 mm	220-230	420-459	14 kg	₹230328
HBG-3018	772 x 467 x 64 mm	220-230	525-574	15 kg	240912
HBG-3618 †	924 x 467 x 156 mm	220-230	630-689	17 kg	251328
HBG-4818 ‡	1219 x 467 x 156 mm	220-230	840-918	19 kg	272328
HBG-6018 ‡	1534 x 467 x 156 mm	220-230	1050-1148	28 kg	293244
HBG-7218 ‡	1838 x 467 x 156 mm	220-230	1260-1378	31 kg	314160

† Height includes standard 102 mm legs.

‡ Units 1219 mm and larger are constructed of two equal sized pieces of glass which create a seam.

All Portable Heated Base Glass Shelf Models Feature:

Cord Location: Center of side with switch.

OPTIONS (available at time of purchase only)

Ceramic Glass Color – Black standard

HBG-GLASS-WHT White

No Charge

Angled Food Stop keeps product on the heat zone – Choose size/color

610 mm	HBG-FS-24	<i>Designer Black</i>	HBG-FSW-24	White	each ₹12600
672 mm	HBG-FS-30	<i>Designer Black</i>	HBG-FSW-30	White	each 15036
914 mm	HBG-FS-36	<i>Designer Black</i>	HBG-FSW-36	White	each 17472
1219 mm	HBG-FS-48	<i>Designer Black</i>	HBG-FSW-48	White	each 20160
1524 mm	HBG-FS-60	<i>Designer Black</i>	HBG-FSW-60	White	each 22848
1829 mm	HBG-FS-72	<i>Designer Black</i>	HBG-FSW-72	White	each 25704

Trim Ring color – Stainless Steel standard

HBG-TRIM-BLK Black

HBG-TRIM-WHT White


₹4116

Frame (base) color – Black standard – Non-standard colors are non-returnable –

HBG-FRAME-WHT White

No Charge

COLORS AND FINISHES – INSIDE BACK COVER



Portable Heated
Base Glass
Modular Shelf

Hatco's ceramic glass creates uniform heat across the entire top surface. The new design uses a modular system, so units can be placed side-by-side. This allows great flexibility in buffet areas. Each unit's glass surface is the size of a 1/1 GN food pan.

- Electronic temperature control with five settings for 55°, 65°, 75°, 85° and 95°C
- The portable, modular system design offers great flexibility
- Simple design for easy cleaning and maintenance
- Durable stainless steel housing



A series of HGSM-4060



HGSM-4060

PORTABLE HEATED BASE GLASS MODULAR SHELF					
Model	Dimensions W x D x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
HGSM-4060	400 x 600 x 58 mm	230	300	8 kg	₹47124

All Portable Heated Base Glass Modular Shelf Models Feature:
Cord Location: Left back of unit.



Glo-Ray® Portable Heated Shelves

Whether you need a heated workspace or extra base heat in a pass-through or buffet area, Hatco's full line of Glo-Ray® Heated Shelf options can help you. Using a blanket heating element for an even temperature, the thermostatically-controlled base safely extends the holding time of your food.

Flexibility, style and quality mark these workhorses of the buffet. Available in a variety of depths to meet your specific needs.

- Uniform heat distribution with blanket-type element
- Built-in adjustable thermostat controls surface temperature
- Extruded aluminum base with stainless steel top – optional Hardcoat Aluminum surface
- Optional 102 mm legs (standard on 914 mm and wider models)
- Optional slant leg kit and pan rail
- Model widths from 457 to 1829 mm
- Model depths: 152, 197, 248, 305, 349, 394, 400, 445, 495, 546, 597, 648 mm

continued on next page...



GRS-30-I in optional *Designer* color with accessory food pans shown below a GRAH-36 Strip Heater in optional *Designer* color with infinite switch and accessory C-leg stands (cord and plug for units not shown)

PORTABLE HEATED SHELVES

continued on next page...


Model	Dimensions W x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
495 mm depth I (standard) – accommodates 305 x 508 mm steam table pans					
GRS-18-I	457 x 57 mm	220	229	7 kg	₹ 89712
GRS-24-I	610 x 57 mm	220	320	9 kg	97944
GRS-30-I	762 x 57 mm	220	412	11 kg	105420
GRS-36-I	914 x 133 mm	220	503	13 kg	112644
GRS-42-I	1067 x 133 mm	220	549	15 kg	127092
GRS-48-I	1219 x 133 mm	220	640	16 kg	132384
GRS-54-I	1372 x 133 mm	220	732	19 kg	142464
GRS-60-I	1524 x 133 mm	220	823	20 kg	147588
GRS-66-I	1676 x 133 mm	220	915	23 kg	153216
GRS-72-I	1829 x 133 mm	220	1006	25 kg	165816
152 mm depth A					
GRS-18-A	457 x 57 mm	220	91	5 kg	₹ 67200
GRS-24-A	610 x 57 mm	220	114	5 kg	69384
GRS-30-A	762 x 57 mm	220	137	6 kg	72240
GRS-36-A	914 x 133 mm	220	160	7 kg	74676
GRS-42-A	1067 x 133 mm	220	205	9 kg	82488
GRS-48-A	1219 x 133 mm	220	228	9 kg	84840
GRS-54-A	1372 x 133 mm	220	251	10 kg	86940
GRS-60-A	1524 x 133 mm	220	274	11 kg	88788
GRS-66-A	1676 x 133 mm	220	297	12 kg	95256
GRS-72-A	1829 x 133 mm	220	320	13 kg	96684
197 mm depth B					
GRS-18-B	457 x 57 mm	220	91	5 kg	₹ 69468
GRS-24-B	610 x 57 mm	220	114	5 kg	72240
GRS-30-B	762 x 57 mm	220	137	6 kg	75936
GRS-36-B	914 x 133 mm	220	160	7 kg	79212
GRS-42-B	1067 x 133 mm	220	205	9 kg	86940
GRS-48-B	1219 x 133 mm	220	228	9 kg	90972
GRS-54-B	1372 x 133 mm	220	251	10 kg	92652
GRS-60-B	1524 x 133 mm	220	274	11 kg	97104
GRS-66-B	1676 x 133 mm	220	297	12 kg	98532
GRS-72-B	1829 x 133 mm	220	320	13 kg	103068
248 mm depth C					
GRS-18-C	457 x 57 mm	220	114	5 kg	₹ 92652
GRS-24-C	610 x 57 mm	220	160	5 kg	75936
GRS-30-C	762 x 57 mm	220	206	6 kg	79968
GRS-36-C	914 x 133 mm	220	252	7 kg	83664
GRS-42-C	1067 x 133 mm	220	274	9 kg	92652
GRS-48-C	1219 x 133 mm	220	320	9 kg	97104
GRS-54-C	1372 x 133 mm	220	366	10 kg	99204
GRS-60-C	1524 x 133 mm	220	412	11 kg	104916
GRS-66-C	1676 x 133 mm	220	458	12 kg	108108
GRS-72-C	1829 x 133 mm	220	504	13 kg	111636
305 mm depth D					
GRS-18-D	457 x 57 mm	220	183	5 kg	₹ 74676
GRS-24-D	610 x 57 mm	220	229	6 kg	79968
GRS-30-D	762 x 57 mm	220	274	8 kg	84840
GRS-36-D	914 x 133 mm	220	320	9 kg	88956
GRS-42-D	1067 x 133 mm	220	412	10 kg	98784
GRS-48-D	1219 x 133 mm	220	457	12 kg	104076
GRS-54-D	1372 x 133 mm	220	503	13 kg	108276
GRS-60-D	1524 x 133 mm	220	548	15 kg	112812
GRS-66-D	1676 x 133 mm	220	594	16 kg	117516
GRS-72-D	1829 x 133 mm	220	640	17 kg	122052
349 mm depth E					
GRS-18-E	457 x 57 mm	220	183	6 kg	₹ 77700
GRS-24-E	610 x 57 mm	220	229	7 kg	83580
GRS-30-E	762 x 57 mm	220	274	9 kg	88116
GRS-36-E	914 x 133 mm	220	320	10 kg	93828
GRS-42-E	1067 x 133 mm	220	412	11 kg	104076
GRS-48-E	1219 x 133 mm	220	457	13 kg	109452
GRS-54-E	1372 x 133 mm	220	503	14 kg	114912
GRS-60-E	1524 x 133 mm	220	548	15 kg	119952
GRS-66-E	1676 x 133 mm	220	594	17 kg	124404
GRS-72-E	1829 x 133 mm	220	640	18 kg	130536

All Portable Heated Shelves Feature:

Pan Capacity (305 x 508 mm): GRS-18-I, -24-I = 1-pan
GRS-30-I, -36-I = 2-pan
GRS-42-I, -48-I = 3-pan
GRS-54-I, -60-I = 4-pan
GRS-66-I, -72-I = 5-pan

Cord Location: Center of side with controls.

OPTIONS AND ACCESSORIES – PAGE 82



Glo-Ray® Portable Heated Shelves

continued...



GRS-30-I in optional Designer color with accessory pan rail and food pans


PORTABLE HEATED SHELVES continued from previous page

Model	Dimensions W x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price	Model	Dimensions W x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
394 mm depth						546 mm depth					
GRS-18-F	457 x 57 mm	220	183	6 kg	₹ 81228	GRS-18-J	457 x 57 mm	220	274	9 kg	₹ 97188
GRS-24-F	610 x 57 mm	220	229	8 kg	86016	GRS-24-J	610 x 57 mm	220	343	12 kg	102396
GRS-30-F	762 x 57 mm	220	274	10 kg	91980	GRS-30-J	762 x 57 mm	220	412	14 kg	110292
GRS-36-F	914 x 133 mm	220	320	11 kg	97104	GRS-36-J	914 x 133 mm	220	480	15 kg	117936
GRS-42-F	1067 x 133 mm	220	412	13 kg	108528	GRS-42-J	1067 x 133 mm	220	618	16 kg	133056
GRS-48-F	1219 x 133 mm	220	457	15 kg	114156	GRS-48-J	1219 x 133 mm	220	686	17 kg	140112
GRS-54-F	1372 x 133 mm	220	503	17 kg	120960	GRS-54-J	1372 x 133 mm	220	755	20 kg	149436
GRS-60-F	1524 x 133 mm	220	548	18 kg	126588	GRS-60-J	1524 x 133 mm	220	823	22 kg	156660
GRS-66-F	1676 x 133 mm	220	594	19 kg	131376	GRS-66-J	1676 x 133 mm	220	892	24 kg	164892
GRS-72-F	1829 x 133 mm	220	640	20 kg	139104	GRS-72-J	1829 x 133 mm	220	961	26 kg	175392
400 mm depth						597 mm depth					
GRS-18-G	457 x 57 mm	220	206	6 kg	₹ 82572	GRS-18-K	457 x 57 mm	220	297	9 kg	₹101808
GRS-24-G	610 x 57 mm	220	274	8 kg	89124	GRS-24-K	610 x 57 mm	220	389	12 kg	107268
GRS-30-G	762 x 57 mm	220	343	10 kg	95256	GRS-30-K	762 x 57 mm	220	480	14 kg	115416
GRS-36-G	914 x 133 mm	220	412	11 kg	101136	GRS-36-K	914 x 133 mm	220	572	15 kg	124152
GRS-42-G	1067 x 133 mm	220	480	13 kg	113904	GRS-42-K	1067 x 133 mm	220	686	16 kg	139104
GRS-48-G	1219 x 133 mm	220	549	15 kg	120204	GRS-48-K	1219 x 133 mm	220	778	17 kg	148008
GRS-54-G	1372 x 133 mm	220	618	17 kg	126924	GRS-54-K	1372 x 133 mm	220	869	20 kg	156576
GRS-60-G	1524 x 133 mm	220	686	18 kg	133392	GRS-60-K	1524 x 133 mm	220	961	22 kg	166320
GRS-66-G	1676 x 133 mm	220	755	19 kg	134484	GRS-66-K	1676 x 133 mm	220	1052	24 kg	175980
GRS-72-G	1829 x 133 mm	220	823	20 kg	145152	GRS-72-K	1829 x 133 mm	220	1144	26 kg	184212
445 mm depth						648 mm depth					
GRS-18-H	457 x 57 mm	220	206	7 kg	₹ 85680	GRS-18-L	457 x 57 mm	220	320	9 kg	₹106596
GRS-24-H	610 x 57 mm	220	274	9 kg	93408	GRS-24-L	610 x 57 mm	220	435	12 kg	111636
GRS-30-H	762 x 57 mm	220	343	11 kg	99792	GRS-30-L	762 x 57 mm	220	549	15 kg	120540
GRS-36-H	914 x 133 mm	220	412	12 kg	108276	GRS-36-L	914 x 133 mm	220	663	17 kg	130368
GRS-42-H	1067 x 133 mm	220	480	14 kg	120120	GRS-42-L	1067 x 133 mm	220	755	20 kg	146076
GRS-48-H	1219 x 133 mm	220	549	16 kg	127764	GRS-48-L	1219 x 133 mm	220	869	23 kg	155988
GRS-54-H	1372 x 133 mm	220	618	18 kg	134820	GRS-54-L	1372 x 133 mm	220	984	25 kg	165732
GRS-60-H	1524 x 133 mm	220	686	20 kg	141792	GRS-60-L	1524 x 133 mm	220	1098	27 kg	175140
GRS-66-H	1676 x 133 mm	220	755	21 kg	143892	GRS-66-L	1676 x 133 mm	220	1212	29 kg	187656
GRS-72-H	1829 x 133 mm	220	823	23 kg	155904	GRS-72-L	1829 x 133 mm	220	1327	31 kg	194628

All Portable Heated Shelf Models Feature:

Cord Location: Center of side with controls.

OPTIONS AND ACCESSORIES – PAGE 82





THRUSHelf Wire Rack
Mounting Kit safely attaches GRS
Heated Shelf units to wire racks
(GRS models only)

OPTIONS (available at time of purchase only)

Designer colors (top surface not painted) – Non-standard colors are non-returnable – Clear Anodized Standard –

RED	Warm Red	₹16884
BLACK	Black	16884
GRAY	Gray Granite	16884
WHITE	White Granite	16884
NAVY	Navy Blue	16884
GREEN	Hunter Green	16884
COPPER	Antique Copper	16884

Hardcoat Aluminum Surface in lieu of stainless steel on standard 495 mm deep GRS models only – (please consult factory for pricing of other depths)

HC 18-42	GRS-18 through GRS-42	₹19824
HC 48-72	GRS-48 through GRS-72	33600
GRS-RECTH	Thermostat Guard	No Charge

ACCESSORIES (available for purchase at any time)



GRS-LEGS	102 mm Adjustable Legs (standard on units GRS-36 and larger)	₹5544
GRS-SLANT	Slant Leg Kit for models 305 mm deep or deeper	2688

Chrome Pan Rail for 495 mm deep GRS models –

2 RAIL	2-pan	₹17472
3 RAIL	3-pan	18816
4 RAIL	4-pan	35112
5 RAIL	5-pan	36372
THRUSHelf	Bolt and fender washer leg accessory kit for attaching one GRS unit to a wire rack shelf	₹1260

FOOD PANS AND TRIVETS – PAGE 155

COLORS AND FINISHES – INSIDE BACK COVER



Glo-Ray® Mini-Merchandisers

Hatco's convenient Mini-Merchandisers create impulse sales by placing fresh product in front of customers. Using a limited amount of valuable counterspace, these flexible warmers come in a variety of shapes, sizes and colors to hold food samples, hors d'oeuvres and packaged product.

- Ideal for delis, supermarkets, convenience stores, kiosks or concession stands where counterspace is limited
- Sturdy acrylic sneeze guard safeguards food serving areas
- Lighted rocker switch for easy On/Off
- Shatter-resistant incandescent lights enhance product displays while safeguarding food from bulb breakage
- Thermostatically-controlled heated base to extend holding times of most foods
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Food stop and 102 mm food bins standard (GRHW-1SG only)



GRHW-1SG

GRHW-2P with
102 mm legs and
accessory food pans

MINI-MERCHANDISERS

Model	Description	Dimensions W x D x H Includes sneeze guard	Base Dimensions W x D	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
GRHW-1P	Hors d'oeuvres warmer, 2 bulbs	565 x 414 x 451 mm	533 x 349 mm	220	782	16 kg	₹184800
GRHW-2P	Hors d'oeuvres warmer, 4 bulbs	1099 x 414 x 527 mm	1067 x 349 mm	220	1560	31 kg	244440
GRHW-1SG	Single horizontal shelf, 2 bulbs	565 x 414 x 451 mm	533 x 349 mm	220	782	17 kg	220668

All Mini-Merchandiser Models Feature:

Included with Merchandiser: Thermostatically-controlled base, 191 mm sneeze guard, display lights, 25 mm rubber legs (except GRHW-2P has 102 mm legs), five 102 mm bins (GRHW-1SG only) and 1829 mm cord and plug.

Cord Location: Base end plate, same side as switch.

OPTIONS (available at time of purchase only)

Designer colors – Non-standard colors are non-returnable – Clear Anodized Aluminum Standard –

RED	Warm Red	₹42504
BLACK	Black	42504
GRAY	Gray Granite	42504
WHITE	White Granite	42504
NAVY	Navy Blue	42504
GREEN	Hunter Green	42504
COPPER	Antique Copper	42504
PANEL	Plexi-Glass side panels	20160


ACCESSORIES (available for purchase at any time)

Chef LED 230V adjustable bulb – CE options for input voltages above 200V – bulbs must be rotated down –

CLED-3000-230	Similar to warm Halogen light	CLED-4000-230	Similar to cool Fluorescent light	₹11676
4"LEGS	102 mm Adjustable Legs (standard on GRHW-2P)			₹5544

FOOD PANS AND TRIVETS – PAGE 155

COLORS AND FINISHES – INSIDE BACK COVER

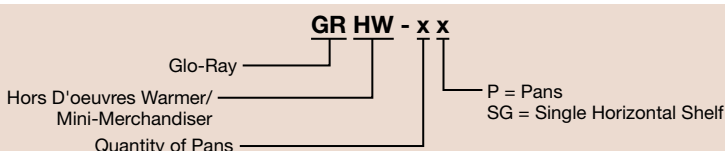CLED-3000 and -4000
Accessory

Glo-Ray® Buffet Warmers

Hold hot food at optimum serving temperatures in buffet lines or in temporary serving areas with Hatco Glo-Ray® Buffet Warmers. Choose from either standard or *Designer* style models in many widths to fit your operation.

- Available with *Designer* color insets (GR2BW only) and the choice of an entire unit in color as well
- Thermostatically-controlled heated base of 27°-93°C extends holding times of most foods
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Sturdy plexi-glass sneeze guard
- Shatter-resistant incandescent lights enhance product displays while safeguarding food from bulb breakage
- Available in a variety of widths from 635-1988 mm



GRBW-30 with optional *Designer* color and accessory food pans



GR2BW-30 with optional *Designer* Red inset panels and accessory food pans



GR2BW-30 in optional *Designer* color with plexi-glass side enclosures and accessory food pans

BUFFET WARMERS

Model	No. Of Light Bulbs	Dimensions W x D x H Includes sneeze guard	Maximum Pan Capacity 305 x 508 mm pan	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
GRBW-24	2	638 x 572 x 451 mm	1	220	920	21 kg	₹197064
GRBW-30	2	791 x 572 x 451 mm	2	220	1172	24 kg	217728
GRBW-36	3	943 x 572 x 527 mm	2	220	1454	26 kg	238392
GRBW-42	3	1095 x 572 x 527 mm	3	220	1648	31 kg	259056
GRBW-48	4	1248 x 572 x 527 mm	3	220	1940	35 kg	279720
GRBW-54	4	1400 x 572 x 527 mm	4	220	2182	37 kg	300384
GRBW-60	5	1553 x 572 x 527 mm	4	220	2474	41 kg	321048
GRBW-66	5	1705 x 572 x 527 mm	5	220	2726	44 kg	341712
GRBW-72	5	1857 x 572 x 527 mm	5	220	2983	49 kg	362376

All Buffet Warmer Models Feature:

GRBW Base Dimensions: 638-1857 W x 495 D mm.

Cord Location: Base end plate, same side as switch.

DESIGNER BUFFET WARMERS

Model*	No. Of Light Bulbs	Dimensions W x D x H Includes sneeze guard	Maximum Pan Capacity 305 x 508 mm pan	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
GR2BW-24	2	768 x 686 x 483 mm	1	220	950	34 kg	₹349104
GR2BW-30	2	921 x 686 x 483 mm	2	220	1210	39 kg	381696
GR2BW-36	2	1073 x 686 x 483 mm	2	220	1450	44 kg	414288
GR2BW-42	4	1226 x 686 x 559 mm	3	220	1750	50 kg	457548
GR2BW-48	4	1378 x 686 x 559 mm	3	220	2000	57 kg	500808
GR2BW-54	4	1530 x 686 x 559 mm	4	220	2250	59 kg	552468
GR2BW-60	6	1683 x 686 x 559 mm	4	220	2600	70 kg	604128
GR2BW-66	6	1835 x 686 x 559 mm	5	220	2860	77 kg	646464
GR2BW-72	6	1988 x 686 x 559 mm	5	220	3125	84 kg	688800

* When no color is specified, color inset panels and corner caps will be black.

All Designer Buffet Warmer Models Feature:

Usable Heated Shelf Space: Width of unit minus 165 x 552 D mm.


Cord Location: Center of bottom on control side.

OPTIONS AND ACCESSORIES – PAGE 85

FOOD PANS AND TRIVETS – PAGE 155

BUFFET WARMER MAXIMUM PAN CAPACITIES

Model	Pan Capacity
GRBW-24, GR2BW-24:	1 full size pan
GRBW-30, -36, GR2BW-30, -36:	2 full size pans
GRBW-42, -48, GR2BW-42, -48:	3 full size pans
GRBW-54, -60, GR2BW-54, -60:	4 full size pans
GRBW-66, -72, GR2BW-66, -72:	5 full size pans





OPTIONS (available at time of purchase only)

Designer Colors – Clear Anodized Aluminum Standard –

Non-standard colors are non-returnable –

₹42504

RED	Warm Red	BLACK	Black	GRAY	Gray Granite	COPPER	Antique Copper
WHITE	White Granite	NAVY	Navy Blue	GREEN	Hunter Green		

Designer Inset Panel colors, GR2BW models – Black Standard –

Non-standard colors are non-returnable –

No Charge

RED	Warm Red	GRAY	Gray Granite	GREEN	Hunter Green	COPPER	Antique Copper
WHITE	White Granite	NAVY	Navy Blue				

Designer Corner Caps, GR2BW models – Black Standard –

Non-standard colors are non-returnable –

No Charge

DKGRAY	Dark Gray
---------------	-----------

Acrylic Front and two Side Enclosures in lieu of Sneeze Guards
(available for GRBW-24, -30, -36, -42, & -48 models only)

FRTENCL-24, -30	-24, -30 models	₹38052
FRTENCL-36, -42, -48	-36, -42, -48 models	43344
SIDE-ENCL	Two Acrylic Side Enclosures (GRBW models only)	25872
SIDE-ENCL2	Two Acrylic Side Enclosure (GR2BW models only)	25872

Hardcoat Aluminum Surface, GRBW models –




HC 24-42	GRBW-24 through GRBW-42	₹13524
HC 48-72	GRBW-48 through GRBW-72	27048
INF	Infinite Control for Top Heat Only (GRBW-24 through -60 and GR2BW-24 through -60 models only)	4284
9.375BP	238 mm Sneeze Guard in lieu of standard 191 mm (GRBW models only)	add per 305 mm per side 1176
14BP	356 mm Sneeze Guard in lieu of standard 191 mm	add per 305 mm per side 2268

ACCESSORIES (available for purchase at any time)

GRBW-LEGS	102 mm Adjustable Legs for GRBW-24 model (standard on GRBW-42 or larger)	₹5544
2SD-LEGS	102 mm Designer Legs for GR2BW-24 model (standard on GR2BW-30 or larger)	10080
Pan Rail for GRBW models (not for use with Acrylic Front Enclosure)		
2 RAIL	2-pan	₹17472
3 RAIL	3-pan	18816
4 RAIL	4-pan	35112
5 RAIL	5-pan	36372
Chef LED 230V adjustable bulb – CE options for input voltages above 200V – bulbs must be rotated down –		
CLED-3000-230	Similar to warm Halogen light	₹11676
CLED-4000-230	Similar to cool Fluorescent light	

FOOD PANS AND TRIVETS – PAGE 155

COLORS AND FINISHES – INSIDE BACK COVER

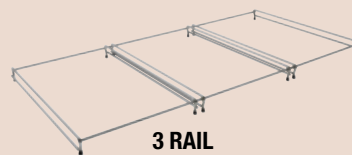

Built-Ins



Built-In Flush Mount Ceramic Glass Heated Shelves

Give your operation a seamless look with the Built-In Flush Mount Ceramic Glass Heated Shelves. The bracket mounting hardware gives a true flush mount appearance that will safely hold food hot while blending in with your decor. It is a must for buffet lines in cafeterias, restaurants and more!

- All models have a Ceramic Glass surface and are bottom mount, flush with the countertop
- Standard Black or optional white Ceramic Glass surface
- Blanket-type element with thermostatically-controlled heated base results in uniform heat to extend food holding times
- Insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature.
- Standard control includes thermostat, lighted rocker switch and mounting brackets
- 914 mm Conduit is standard – Option: with ITC Control Boxes only : 1829 and 3048 mm lengths are available



HSBF-GL-4818 in standard Black Glass



HSBF-GL-4818 in optional White Glass

BUILT-IN FLUSH - CERAMIC GLASS

Model ^M	Overall Shelf Dimensions (includes brackets) W x D x H	Heated Shelf Space W x D	Cutout Size (with 10 mm corner radii) W x D	Watts/Amps 220V	List Price
HSBF-GL-2418	687 x 537 x 139 mm	607 x 457 mm	616 x 467 mm	420 / 1.9	₹250824
HSBF-GL-3018	839 x 537 x 139 mm	759 x 457 mm	768 x 467 mm	525 / 2.4	261408
HSBF-GL-3618	992 x 537 x 139 mm	912 x 457 mm	921 x 467 mm	630 / 2.9	272580
HSBF-GL-4818	1297 x 537 x 139 mm	1217 x 457 mm	1226 x 467 mm	840 / 3.8	298704

^M Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 93°C. Hatco is not responsible for counter damage caused by heat from the warmer.

All Heated Shelves Built-In Flush-Ceramic Glass feature:

Control Box: Thermostat Control with Lighted Rocker Switch and 914 mm conduit.

Cord Location: Cord is attached to Control Box.

Cord and Plug: 1829 mm cord and plug.

OPTIONS (available at time of purchase only)

Ceramic Glass Color – Black standard –

HSBF-GLASS-WHT	White	No Charge
Designer Color for Flush Mount Control Bezel – Stainless Steel standard – Non-standard colors are non-returnable		
RED	Warm Red	₹3948
BLACK	Black	3948
GRAY	Gray Granite	3948
WHITE	White Granite	3948
NAVY	Navy Blue	3948
GREEN	Hunter Green	3948
COPPER	Antique Copper	3948

HSBF-FLUSH-ITC Stainless steel Flush Mount Recessed Electronic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 134 D mm) ₹16968

HSBF-SMFLUSH-ITC Flush Mount Electronic Control Box with lighted On/Off rocker switch (215 W x 102 H x 97 mm D) ₹16968

HSBF-FLUSH-TSTAT Stainless steel Flush Mount Recessed Thermostatic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 115 mm D) No Charge

HSBF-SMFLUSH-TSTAT Flush Mount Thermostatic Control Box with lighted On/Off rocker switch (215 W x 94 H x 100 mm D) No Charge

COND-6 1829 mm Conduit (914 mm standard) – Flush Mount and Small Flush Mount ITC Control Boxes only ₹3864

COND-10 3048 mm Conduit (914 mm standard) – Flush Mount and Small Flush Mount ITC Control Boxes only 7476

COLORS AND FINISHES – INSIDE BACK COVER



HSBF-FLUSH-ITC



HSBF-FLUSH-TSTAT




HSBF-SMFLUSH-ITC



HSBF-SMFLUSH-TSTAT

OPTIONAL CONTROL BOX CUTOUT DIMENSIONS

Model	Width	Height	Depth
HSBF-FLUSH-ITC	149 mm	162 mm	121 mm
HSBF-FLUSH-TSTAT	149 mm	162 mm	102 mm
HSBF-SMFLUSH-ITC	171 mm	95 mm	92 mm
HSBF-SMFLUSH-TSTAT	171 mm	87 mm	86 mm



Built-In Flush Mount Hardcoat Aluminum Heated Shelves

Give your operation a seamless look with the Heated Shelves Built-In Flush-Hardcoat Aluminum. The bracket mounting hardware gives a true flush mount appearance that will safely hold food hot while blending in with your decor. It is a must for buffet lines in cafeterias, restaurants and more!

- All models have a Hardcoat Aluminum surface and are bottom mount, flush with the countertop
- Blanket-type element with thermostatically-controlled heated base results in uniform heat to extend food holding times.
- Insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature
- Standard control includes thermostat, lighted rocker switch and mounting brackets
- 914 mm Conduit is standard – Option: with ITC Control Boxes only, 1829 and 3048 mm lengths are available



HSBF-HC-4818

BUILT-IN FLUSH MOUNT HARDCOAT ALUMINUM HEATED SHELVES

Model ^M	Overall Shelf Dim. (includes brackets) W x D x H	Heated Shelf Space W x D	Cutout Size (with 10 mm corner radii) W x D	Watts/ Amps 220V	List Price
HSBF-HC-2418	690 x 537 x 135 mm	610 x 457 mm	619 x 467 mm	420 / 1.9	₹154644
HSBF-HC-2424	690 x 690 x 135 mm	610 x 610 mm	619 x 619 mm	622 / 2.8	155232
HSBF-HC-2430	690 x 842 x 135 mm	610 x 762 mm	619 x 772 mm	722 / 3.3	168588
HSBF-HC-3018	842 x 537 x 135 mm	762 x 457 mm	772 x 467 mm	525 / 2.4	164724
HSBF-HC-3024	842 x 690 x 135 mm	762 x 610 mm	772 x 619 mm	746 / 3.4	165396
HSBF-HC-3030	842 x 842 x 135 mm	762 x 762 mm	772 x 772 mm	869 / 4.0	183540
HSBF-HC-3618	994 x 537 x 135 mm	914 x 457 mm	924 x 467 mm	630 / 2.9	175140
HSBF-HC-3624	994 x 690 x 135 mm	914 x 610 mm	924 x 619 mm	870 / 4.0	175896
HSBF-HC-3630	994 x 842 x 135 mm	914 x 762 mm	924 x 772 mm	933 / 4.2	204372
HSBF-HC-4218	1147 x 537 x 135 mm	1067 x 457 mm	1076 x 467 mm	680 / 3.1	183792
HSBF-HC-4224	1147 x 690 x 135 mm	1067 x 610 mm	1076 x 619 mm	997 / 4.5	184716
HSBF-HC-4230	1147 x 842 x 135 mm	1067 x 762 mm	1076 x 772 mm	1162 / 5.3	224448
HSBF-HC-4818	1299 x 537 x 135 mm	1219 x 457 mm	1229 x 467 mm	840 / 3.8	193620
HSBF-HC-4824	1299 x 690 x 135 mm	1219 x 610 mm	1229 x 619 mm	1121 / 5.1	194544
HSBF-HC-4830	1299 x 842 x 135 mm	1219 x 762 mm	1229 x 772 mm	1201 / 5.5	241836

^M Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 93°C. Hatco is not responsible for counter damage caused by heat from the warmer.

All Built-In Flush Mount Hardcoat Aluminum Heated Shelf Models Feature:

Control Box: Thermostat Control with Lighted Rocker Switch and 914 mm conduit.

Cord Location: Cord is attached to Control Box.

Cord and Plug: 1829 mm cord and plug.

OPTIONS (available at time of purchase only)

Designer Color for Flush Mount Control Bezel – Stainless Steel standard – Non-standard colors are non-returnable

RED	Warm Red	₹3948
BLACK	Black	3948
GRAY	Gray Granite	3948
WHITE	White Granite	3948
NAVY	Navy Blue	3948
GREEN	Hunter Green	3948
COPPER	Antique Copper	3948

HSBF-FLUSH-ITC Stainless steel Flush Mount Recessed Electronic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 134 D mm) ₹16968

HSBF-SMFLUSH-ITC Flush Mount Electronic Control Box with lighted On/Off rocker switch (215 W x 102 H x 97 mm D) ₹16968

HSBF-FLUSH-TSTAT Stainless steel Flush Mount Recessed Thermostatic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 115 mm D) No Charge

HSBF-SMFLUSH-TSTAT Flush Mount Thermostatic Control Box with lighted On/Off rocker switch (215 W x 94 H x 100 mm D) No Charge

COND-6 1829 mm Conduit (914 mm standard) – Flush Mount and Small Flush Mount ITC Control Boxes only ₹3864

COND-10 3048 mm Conduit (914 mm standard) – Flush Mount and Small Flush Mount ITC Control Boxes only 7476

COLORS AND FINISHES – INSIDE BACK COVER



HSBF-FLUSH-ITC



HSBF-FLUSH-TSTAT




HSBF-SMFLUSH-ITC



HSBF-SMFLUSH-TSTAT

OPTIONAL CONTROL BOX CUTOUT DIMENSIONS

Model	Width	Height	Depth
HSBF-FLUSH-ITC	149 mm	162 mm	121 mm
HSBF-FLUSH-TSTAT	149 mm	162 mm	102 mm
HSBF-SMFLUSH-ITC	171 mm	95 mm	92 mm
HSBF-SMFLUSH-TSTAT	171 mm	87 mm	86 mm



Built-In Flush Mount Simulated Stone Heated Shelves

Give your operation a seamless look with the Built-In Flush Mount Simulated Stone Heated Shelves. The bracket mounting hardware gives a true flush mount appearance that will safely hold food hot while blending in with your decor. It is a must for buffet lines in cafeterias, restaurants and more!

- All models are bottom mount, flush with the countertop
- Models with simulated stone are Swanstone®
- Blanket-type element with thermostatically-controlled heated base results in uniform heat to extend food holding times
- Insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature.
- Standard control includes thermostat, lighted rocker switch and mounting brackets
- 914 mm Conduit is standard – Option: with ITC Control Boxes only, 1829 and 3048 mm lengths are available



HSBF-SS-4818
in standard Ash Gray
simulated stone



HSBF-SS-4818
in optional Ice
simulated stone

HSBF-SS-4818
in optional Birch
simulated stone



BUILT-IN FLUSH MOUNT SIMULATED STONE HEATED SHELVES

Model™	Overall Shelf Dimensions (includes brackets) W x D x H	Heated Shelf Space W x D	Cutout Size (with 10 mm corner radii) W x D	Watts/Amps	List Price
HSBF-SS-2418	686 x 533 x 142 mm	610 x 457 mm	619 x 467 mm	220V 534 / 2.4	₹185052
HSBF-SS-3018	838 x 533 x 142 mm	762 x 457 mm	772 x 467 mm	655 / 3.0	192612
HSBF-SS-3618	990 x 533 x 142 mm	914 x 457 mm	924 x 467 mm	782 / 3.6	200760
HSBF-SS-4818	1295 x 533 x 142 mm	1219 x 457 mm	1229 x 467 mm	1068 / 4.9	227556

™ Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 93°C. Hatco is not responsible for counter damage caused by heat from the warmer.

All Built-In Flush Mount Simulated Stone Heated Shelf Models Feature:

Control Box: Thermostat Control with Lighted Rocker Switch and 914 mm conduit.

Cord Location: Cord is attached to Control Box.

Cord and Plug: 1829 mm cord and plug.

OPTIONS (available at time of purchase only)

Simulated stone colors – Non-standard colors are non-returnable – Ash Gray standard –

SS-BIRCH	Birch	No Charge
SS-ICE	Ice	No Charge

Designer Color for Flush Mount Control Bezel – Stainless Steel standard – Non-standard colors are non-returnable

RED	Warm Red	₹3948
BLACK	Black	3948
GRAY	Gray Granite	3948
WHITE	White Granite	3948
NAVY	Navy Blue	3948
GREEN	Hunter Green	3948
COPPER	Antique Copper	3948

HSBF-FLUSH-ITC	Stainless steel Flush Mount Recessed Electronic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 134 D mm)	₹16968
-----------------------	---	--------

HSBF-SMFLUSH-ITC	Flush Mount Electronic Control Box with lighted On/Off rocker switch (215 W x 102 H x 97 mm D)	₹16968
-------------------------	--	--------

HSBF-FLUSH-TSTAT	Stainless steel Flush Mount Recessed Thermostatic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 115 mm D)	No Charge
-------------------------	---	-----------

HSBF-SMFLUSH-TSTAT	Flush Mount Thermostatic Control Box with lighted On/Off rocker switch (215 W x 94 H x 100 mm D)	No Charge
---------------------------	--	-----------

COND-6	1829 mm Conduit (914 mm standard) – Flush Mount and Small Flush Mount ITC Control Boxes only	₹3864
---------------	--	-------

COND-10	3048 mm Conduit (914 mm standard) – Flush Mount and Small Flush Mount ITC Control Boxes only	7476
----------------	--	------

COLORS AND FINISHES – INSIDE BACK COVER



HSBF-FLUSH-ITC



HSBF-FLUSH-TSTAT




HSBF-SMFLUSH-ITC



HSBF-SMFLUSH-TSTAT

OPTIONAL CONTROL BOX CUTOUT DIMENSIONS

Model	Width	Height	Depth
HSBF-FLUSH-ITC	149 mm	162 mm	121 mm
HSBF-FLUSH-TSTAT	149 mm	162 mm	102 mm
HSBF-SMFLUSH-ITC	171 mm	95 mm	92 mm
HSBF-SMFLUSH-TSTAT	171 mm	87 mm	86 mm



Remote Cold Built-In Simulated Stone Shelves

These sturdy, foodsafe shelves are a must for buffet lines in cafeterias, restaurants and much more!

The Remote Cold Built-In Simulated Stone Shelves have the added benefit of allowing fabricators the freedom to design.

- Patented thermal break reduces condensation and temperature transfer
- Models are bottom mount units
- Models with simulated stone are Swanstone®
- Units match the Glo-Ray® Built-In Rectangular Heated Simulated Stone Shelves (GRSSB) for a fully integrated look
- Control box comes standard with 1219 mm lead wire
- Condensing unit features easy serviceability with sight glass, service valves, dryer/filter and receiver (CSSR model only)
- CSSBR models have an unattached Condensing unit and Control Box; CSSBX models have unattached Control Box only



CSSBR-4818 in standard Ash Gray simulated stone (unattached Condenser and Control Box included)



CSSBX-4818 in optional Birch simulated stone (unattached Control Box included)

COLD BUILT-IN SIMULATED STONE SHELVES with REMOTE CONDENSER/CONTROL BOX

Model	Overall Shelf Dim. (includes brackets) W x D	Usable Space W x D	Approx. Ship Weight	List Price
CSSBR-2418	686 x 533 mm	610 x 457 mm	40 kg	₹649488
CSSBR-3018	838 x 533 mm	762 x 457 mm	46 kg	656796
CSSBR-3618	991 x 533 mm	914 x 457 mm	47 kg	679224
CSSBR-4818	1295 x 533 mm	1219 x 457 mm	59 kg	777840

All Cold Built-In Simulated Stone Shelf Models with Remote Condenser/Control Box Feature:

Voltage: 220, 230 or 240. **Models Shipped with:** Shelf assembly with temperature probe, control box and condensing unit (shipped loose), TXV valve (unattached).

COLD BUILT-IN SIMULATED STONE SHELVES WITHOUT CONDENSER

Model	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Watts 220V,	Approx. Ship Weight	List Price
CSSBX-2418	686 x 533 mm	607 x 457 mm	17	40 kg	₹524664
CSSBX-3018	838 x 533 mm	762 x 457 mm	17	45 kg	531972
CSSBX-3618	991 x 533 mm	914 x 457 mm	17	45 kg	554400
CSSBX-4818	1295 x 533 mm	1219 x 457 mm	17	57 kg	653016

All Cold Built-In Simulated Stone Shelf Models with Unattached Control Box Only Feature:

Voltage: 220. **Models Shipped with:** Shelf assembly with temperature probe, solenoid valve (attached to shelf), control panel (shipped loose) and TXV valve (unattached).

OPTIONS (available at time of purchase only)


Simulated stone colors – Non-standard colors are non-returnable – Ash Gray Standard –

SS-BIRCH	Birch	No Charge
SS-ICE	Ice	No Charge

COLORS AND FINISHES – INSIDE BACK COVER

COUNTERTOP CUTOUT DIMENSIONS

Model	Width with 10 mm radii	Height with 10 mm radii
CSSB(R)(X)-2418	619 mm	467 mm
CSSB(R)(X)-3018	772 mm	467 mm
CSSB(R)(X)-3618	924 mm	467 mm
CSSB(R)(X)-4818	1229 mm	467 mm
Model	Width	Height
Control Box (208 W x 165 H mm)	189 mm	143 mm

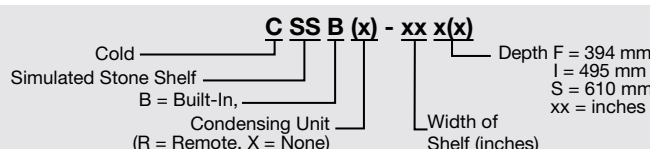

Remote Cold Built-In Flush Top Simulated Stone Shelves

These sturdy, foodsafe shelves are a must for buffet lines in cafeterias, restaurants and much more!

The Remote Cold Built-In Flush Top Simulated Stone Shelves have the added benefit of allowing fabricators the freedom to design.

- Patented thermal break reduces condensation and temperature transfer
- Models are bottom mount units
- Models with simulated stone are Swanstone®
- Control box comes standard with 1219 mm lead wire

- Condensing unit features easy serviceability with sight glass, service valves, dryer/filter and receiver - (CSSBFR models only)
- CSSBFR models have an unattached Condensing unit and Control Box; CSSBFX models have unattached Control Box only



CSSBFR-48-S in optional Ice simulated stone (unattached Condenser and Control Box included)



CSSBFX-48-S in optional Ice simulated stone (unattached Condenser and Control Box included)

COLD BUILT-IN FLUSH TOP SIMULATED STONE SHELVES WITH REMOTE CONDENSER/CONTROL BOX

Model	Overall Shelf Dim. (includes brackets) W x D	Usable Space W x D	Approx. Ship Weight	List Price
CSSBFR-24-F	686 x 470 mm	610 x 394 mm	56 kg	₹648312
CSSBFR-24-I	686 x 572 mm	610 x 495 mm	56 kg	651252
CSSBFR-24-S	686 x 686 mm	610 x 610 mm	69 kg	673932
CSSBFR-36-F	991 x 470 mm	914 x 394 mm	69 kg	675948
CSSBFR-36-I	991 x 572 mm	914 x 495 mm	69 kg	678972
CSSBFR-36-S	991 x 686 mm	914 x 610 mm	71 kg	808584
CSSBFR-48-F	1295 x 470 mm	1219 x 394 mm	71 kg	774648
CSSBFR-48-I	1295 x 572 mm	1219 x 495 mm	71 kg	777756
CSSBFR-48-S	1295 x 686 mm	1219 x 610 mm	76 kg	921396

All Models feature:

Voltage: 220. Models Shipped with: Shelf assembly with temperature probe, control box and condensing unit (shipped loose), TXV valve (unattached).

COLD SIMULATED STONE SHELVES BUILT-IN FLUSH TOP WITHOUT CONDENSER

Model	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Watts 220V	Approx. Ship Weight	List Price
CSSBFX-24-F	686 x 470 mm	610 x 394 mm	17	36 kg	₹523488
CSSBFX-24-I	686 x 572 mm	610 x 495 mm	17	36 kg	526428
CSSBFX-24-S	686 x 686 mm	610 x 610 mm	17	41 kg	549108
CSSBFX-36-F	991 x 470 mm	914 x 394 mm	17	44 kg	551124
CSSBFX-36-I	991 x 572 mm	914 x 495 mm	17	50 kg	554148
CSSBFX-36-S	991 x 686 mm	914 x 610 mm	17	54 kg	683760
CSSBFX-48-F	1295 x 470 mm	1219 x 394 mm	17	54 kg	649824
CSSBFX-48-I	1295 x 572 mm	1219 x 495 mm	17	59 kg	652932
CSSBFX-48-S	1295 x 686 mm	1219 x 610 mm	17	66 kg	796572

All Models feature:

Voltage: 220. Models Shipped with: Shelf assembly with temperature probe, solenoid valve (attached to shelf), control panel (shipped loose) TXV valve (unattached).

OPTIONS (available at time of purchase only)

Simulated stone colors – Non-standard colors are non-returnable – Ash Gray Standard –


SS-BIRCH	Birch	No Charge
SS-ICE	Ice	No Charge

COLORS AND FINISHES – INSIDE BACK COVER

COUNTERTOP CUTOUT DIMENSIONS

Model	Width with 10 mm radii	Height with 10 mm radii
CSSBF(R)(X)-24-F	619 mm	403 mm
CSSBF(R)(X)-24-I	619 mm	505 mm
CSSBF(R)(X)-24-S	619 mm	619 mm
CSSBF(R)(X)-36-F	924 mm	403 mm
CSSBF(R)(X)-36-I	924 mm	505 mm
CSSBF(R)(X)-36-S	924 mm	619 mm
CSSBF(R)(X)-48-F	1229 mm	403 mm
CSSBF(R)(X)-48-I	1229 mm	505 mm
CSSBF(R)(X)-48-S	1229 mm	619 mm
Model	Width	Height
Control Box (208 W x 165 H mm)	189 mm	143 mm

ecoization®
CSSBFR models only



Cold Built-In Flush Top Shelves

These shelves are designed to keep your pre-chilled beverages, hors d'oeuvres, side dishes, buffet items and more in the perfect chill zone.


They have the benefit of allowing fabricators the freedom to design.

- Patented thermal break reduces

condensation and temperature transfer

- All models are top mounted with an Hardcoat Aluminum surface
- Units match the Glo-Ray® Built-In Rectangular Heated Shelves with Flush Top (GRSBF) for a fully integrated look
- Control comes standard with a 1219 mm lead wire
- CSBFR models have unattached Condensing unit and Control Box, CSBFX models have unattached Control Box only

- CSBFR condensing unit features easy serviceability with sight glass, service valves, dryer/filter and receiver
- Units have benefit of allowing fabricators the freedom to design

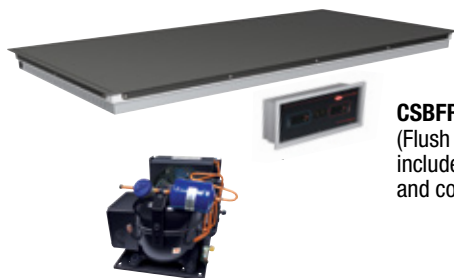

CSBFR-48-S
(Flush Top) All models include remote condenser and control box



CSBFX-48-S
(Flush Top) All models include control box only

COLD BUILT-IN FLUSH TOP SHELVES WITH REMOTE CONDENSER/CONTROL BOX (Hardcoat Aluminum)

Model	Overall Shelf Dimensions W x D	Usable Shelf Space W x D	Approx. Ship Weight	List Price
CSBFR-24-F	648 x 432 mm	610 x 394 mm	47 kg	₹637560
CSBFR-24-I	648 x 533 mm	610 x 495 mm	58 kg	₹639912
CSBFR-24-S	648 x 648 mm	610 x 610 mm	58 kg	₹649404
CSBFR-36-F	953 x 432 mm	914 x 394 mm	39 kg	₹651504
CSBFR-36-I	953 x 533 mm	914 x 495 mm	37 kg	₹654444
CSBFR-36-S	953 x 648 mm	914 x 610 mm	64 kg	₹753816
CSBFR-48-F	1257 x 432 mm	1219 x 394 mm	67 kg	₹737100
CSBFR-48-I	1257 x 533 mm	1219 x 495 mm	67 kg	₹740208
CSBFR-48-S	1257 x 648 mm	1219 x 610 mm	76 kg	₹823788

All Cold Built-In Flush Top Shelf Models with Remote Condenser/Control Box Feature:

Voltage: 220. Models Shipped with: Shelf assembly with temperature probe, control box and condensing unit (shipped loose), TXV valve (unattached).

COLD BUILT-IN FLUSH TOP SHELVES WITHOUT CONDENSER (Hardcoat Aluminum)

Model	Overall Shelf Dimensions W x D	Usable Shelf Space W x D	Watts	Approx. Ship Weight	List Price
CSBFX-24-F	648 x 432 mm	610 x 394 mm	17	29 kg	₹497112
CSBFX-24-I	648 x 533 mm	610 x 495 mm	17	33 kg	₹499464
CSBFX-24-S	648 x 648 mm	610 x 610 mm	17	36 kg	₹508956
CSBFX-36-F	953 x 432 mm	914 x 394 mm	17	35 kg	₹511056
CSBFX-36-I	953 x 533 mm	914 x 495 mm	17	41 kg	₹513996
CSBFX-36-S	953 x 648 mm	914 x 610 mm	17	54 kg	₹613368
CSBFX-48-F	1257 x 432 mm	1219 x 394 mm	17	53 kg	₹596652
CSBFX-48-I	1257 x 533 mm	1219 x 495 mm	17	60 kg	₹599760
CSBFX-48-S	1257 x 648 mm	1219 x 610 mm	17	66 kg	₹683340


All Cold Built-In Flush Top Shelf Models with Unattached Control Box Only Feature:

Voltage: 220. Models Shipped with: Shelf assembly with temperature probe, solenoid valve (attached to shelf), control panel (shipped loose) and TXV valve (unattached).

COUNTERTOP CUTOUT DIMENSIONS

Model	Width		Height	
	Minimum	Maximum	Minimum	Maximum
CSBF(R)(X)-24-F	625 mm	635 mm	409 mm	419 mm
CSBF(R)(X)-24-I	625 mm	635 mm	511 mm	521 mm
CSBF(R)(X)-24-S	625 mm	635 mm	625 mm	635 mm
CSBF(R)(X)-36-F	930 mm	940 mm	409 mm	419 mm
CSBF(R)(X)-36-I	930 mm	940 mm	511 mm	521 mm
CSBF(R)(X)-36-S	930 mm	940 mm	625 mm	635 mm
CSBF(R)(X)-48-F	1234 mm	1245 mm	409 mm	419 mm
CSBF(R)(X)-48-I	1234 mm	1245 mm	511 mm	521 mm
CSBF(R)(X)-48-S	1234 mm	1245 mm	625 mm	635 mm
Control Box (208 W x 165 H mm)	189 mm		143 mm	

ecozation
CSBFR models only




Cold Undermount Shelves

These Anodized Aluminum shelves mount directly against the underside of a granite, quartz, stainless steel or appropriate simulated stone countertop (no cutout required). Cooling transfers through the countertop to the top surface, without puncturing, for a true, seamless look.

They have the benefit of allowing fabricators the freedom to design.

- Mount under appropriate countertop material for a seamless look
- Approved materials include granite and quartz up to 30 mm, Swanstone® as provided by Hatco and certain stainless steel or aluminum surfaces approved by Hatco. Please contact the factory for applications with other material.*
- All models feature an Anodized Aluminum surface
- Control Box comes standard with a 1219 mm lead wire
- CSUR models have unattached Condensing unit and Control Box, CSUX models have unattached Control Box only
- CSUR condensing unit features easy serviceability with sight glass, service valves, dryer/filter and receiver
- Units have benefit of allowing fabricators the freedom to design.

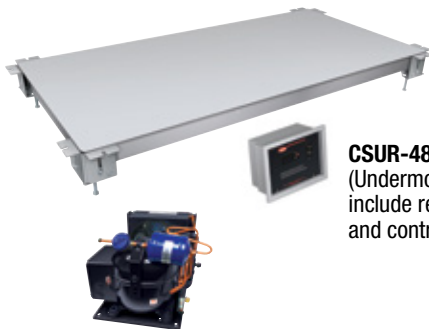

CSUR-48-S
(Undermount) All models include remote condenser and control box only



CSUX-48-S
(Undermount) All models include control box only

COLD UNDERMOUNT SHELVES WITH REMOTE CONDENSER/CONTROL BOX

Model #	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Approx. Ship Weight	List Price
CSUR-24-F	694 x 478 mm	610 x 394 mm	50 kg	₹581952
CSUR-24-I	694 x 579 mm	610 x 495 mm	44 kg	584808
CSUR-24-S	694 x 694 mm	610 x 610 mm	54 kg	591192
CSUR-36-F	998 x 478 mm	914 x 394 mm	54 kg	580944
CSUR-36-I	998 x 579 mm	914 x 495 mm	54 kg	582036
CSUR-36-S	998 x 694 mm	914 x 610 mm	65 kg	669228
CSUR-48-F	1303 x 478 mm	1219 x 394 mm	69 kg	651252
CSUR-48-I	1303 x 579 mm	1219 x 495 mm	65 kg	654192
CSUR-48-S	1303 x 694 mm	1219 x 610 mm	69 kg	716940



All models include thermal mastic caulk and a single use applicator

All Cold Undermount Shelf Models with Remote Condenser/Control Box Feature:

Voltage: 220. **Models Shipped with:** Shelf assembly with temperature probe, control box and condensing unit (shipped loose), TXV valve (unattached), thermal mastic caulk and single use applicator.

- Make structural modifications or add bracing underneath the countertop to ensure countertop will support the weight of the unit and its contents. For mounting bolt and substrate cutout dimensions, please refer to the Installation section in the Operating Manual which found on the Hatco website, www.hatcocorp.com.

COLD UNDERMOUNT SHELVES WITHOUT CONDENSER


Model #	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Watts	Approx. Ship Weight	List Price
CSUX-24-F	694 x 478 mm	610 x 394 mm	17	34 kg	₹457128
CSUX-24-I	694 x 579 mm	610 x 495 mm	17	34 kg	459984
CSUX-24-S	694 x 694 mm	610 x 610 mm	17	38 kg	466368
CSUX-36-F	998 x 478 mm	914 x 394 mm	17	41 kg	456120
CSUX-36-I	998 x 579 mm	914 x 495 mm	17	44 kg	457212
CSUX-36-S	998 x 694 mm	914 x 610 mm	17	45 kg	544404
CSUX-48-F	1303 x 478 mm	1219 x 394 mm	17	46 kg	526428
CSUX-48-I	1303 x 579 mm	1219 x 495 mm	17	51 kg	529368
CSUX-48-S	1303 x 694 mm	1219 x 610 mm	17	56 kg	592116

All Cold Undermount Shelf Models with Unattached Control Box Only Feature:

Voltage: 220. **Models Shipped with:** Shelf assembly with temperature probe, solenoid valve (attached to shelf), control panel (shipped loose) and TXV valve (unattached).

- Make structural modifications or add bracing underneath the countertop to ensure countertop will support the weight of the unit and its contents. For mounting bolt and substrate cutout dimensions, please refer to the Installation section in the Operating Manual, which found on the Hatco website, www.hatcocorp.com.

ECOIZATION
CSUR models only

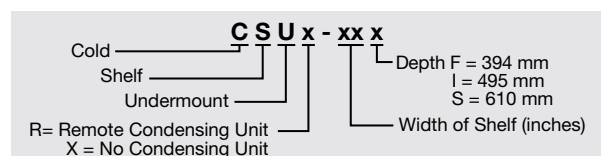

Remote Hot/Cold Built-In Simulated Stone Shelves

Give your operation ultimate flexibility with these patented Remote Hot/Cold Built-In Simulated Stone Shelves. They easily transition between a heated to cold and cold to heated shelf!

They also have the added benefit of allowing fabricators the freedom to design.

- Patented thermal break reduces condensation and temperature transfer
- Shelves change modes from hot to cold or vice versa in as little as 30 minutes, allowing quick change or different dayparts
- All models are bottom mount, flush with the countertop
- Models with simulated stone are Swanstone® or Dekton®
- Control box comes standard with 1219 mm lead wire

- Units match the GRSSB Glo-Ray® Built-In Rectangular Heated Simulated Stone Shelves for a fully integrated look
- Condensing unit features easy serviceability with sight glass, service valves, dryer/filter and receiver (HCSSBR model only)
- HCSSBR models have an unattached Condensing unit and Control Box; HCSSBX models have an unattached Control Box only

HCSSBR-4818
in optional Soke simulated stone



HOT/COLD BUILT-IN SIMULATED STONE SHELVES WITH REMOTE CONDENSER/CONTROL BOX

Model	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Approx. Ship Weight	List Price
HCSSBR-2418	686 x 533 mm	610 x 457 mm	61 kg	₹764736
HCSSBR-3018	838 x 533 mm	762 x 457 mm	69 kg	773052
HCSSBR-3618	991 x 533 mm	914 x 457 mm	73 kg	788088
HCSSBR-4818	1295 x 533 mm	1219 x 457 mm	85 kg	874272

All Hot/Cold Built-In Simulated Stone Shelf Models with Remote Condenser/Control Box Feature:

Voltage: 220. Models Shipped with: Shelf assembly with temperature probes, control box and condensing unit (shipped loose), TXV valve (unattached).

HOT/COLD BUILT-IN SIMULATED STONE SHELVES WITHOUT CONDENSER

Model	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Hot Side Watts 220V,	Approx. Ship Weight	List Price
HCSSBX-2418	686 x 533 mm	610 x 457 mm	371	45 kg	₹639912
HCSSBX-3018	838 x 533 mm	762 x 457 mm	467	48 kg	648228
HCSSBX-3618	991 x 533 mm	914 x 457 mm	558	54 kg	663264
HCSSBX-4818	1295 x 533 mm	1219 x 457 mm	746	64 kg	749448

All Hot/Cold Built-In Simulated Stone Shelf Models with Unattached Control Panel Only Feature:

Voltage: 220. Models Shipped with: Shelf assembly with temperature probes, solenoid valve (attached to shelf), control panel (shipped loose) and TXV valve (unattached).

HCSSBX-4818
with optional black glass-ceramic top surface

COUNTERTOP CUTOUT DIMENSIONS

Model	Width with 10 mm radii	Height with 10 mm radii
HCSSB(R)(X)-2418	619 mm	467 mm
HCSSB(R)(X)-3018	772 mm	467 mm
HCSSB(R)(X)-3618	924 mm	467 mm
HCSSB(R)(X)-4818	1229 mm	467 mm
Model	Width	Height
Control Box	333 mm	143 mm

OPTIONS (available at time of purchase only)

Simulated stone colors – Non-standard colors are non-returnable

– Ash Gray Standard –

SS-BIRCH	Birch	No Charge
SS-ICE	Ice	No Charge

Glass Ceramic colors – All Glass Ceramic colors are non-returnable –

BLACKGLASS	Black Glass-Ceramic Top	No Charge
WHITEGLASS	White Glass-Ceramic Top	No Charge

Dekton Stone Colors – All Dekton surfaces are non-returnable –

For HCSSBR-2418 and HCSSBX-2418 models –

DOMOOS	Domoos	₹68208
REM	Rem	68208
SOKE	Soke	68208

For HCSSBR-3018 and HCSSBX-3018 models –

DOMOOS	Domoos	₹95760
REM	Rem	95760
SOKE	Soke	95760

For HCSSBR-3618 and HCSSBX-3618 models –

DOMOOS	Domoos	₹110376
REM	Rem	110376
SOKE	Soke	110376

For HCSSBR-4818 and HCSSBX-4818 models –

DOMOOS	Domoos	₹115332
REM	Rem	115332
SOKE	Soke	115332

COLORS AND FINISHES – INSIDE BACK COVER


Dekton stone surfaces that are available for these models:

Domoos Rem Soke



Note: Due to the natural texture, patterns may vary.

ECOIZATION®
HCSSBR models only



Remote Hot/Cold Built-In Flush Top Simulated Stone Shelves

Give your operation ultimate flexibility with these patented Remote Hot/Cold Built-In Flush Top Simulated Stone Shelves. They easily transition between a heated to cold and cold to heated shelf!

They also have the added benefit of allowing fabricators the freedom to design.

- Patented thermal break reduces condensation and temperature transfer
- Shelves change modes from hot to cold or vice versa in as little as 30 minutes, allowing quick change or different dayparts
- All models are bottom mount, flush with the countertop
- Models with simulated stone are Swanstone®

- Control box comes standard with 1219 mm lead wire
- Condensing unit features easy serviceability with sight glass, service valves, dryer/filter and receiver (HCSSBFR model only)
- HCSSBFR models have an unattached Condensing unit and Control Box; HCSSBFX models have an unattached Control Box only



HCSSBFR-48-S in optional ice simulated stone (unattached Condenser and Control Box included)



HCSSBFX-4818 in standard Ash Gray simulated stone (unattached Control Box included)

HOT/COLD BUILT-IN FLUSH TOP SIMULATED STONE SHELVES WITH REMOTE CONDENSER/CONTROL BOX

Model	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Approx. Ship Weight	List Price
HCSSBFR-24-F	686 x 470 mm	610 x 394 mm	54 kg	₹ 759528
HCSSBFR-24-I	686 x 572 mm	610 x 495 mm	54 kg	764736
HCSSBFR-24-S	686 x 686 mm	610 x 610 mm	49 kg	772296
HCSSBFR-36-F	991 x 470 mm	914 x 394 mm	73 kg	784980
HCSSBFR-36-I	991 x 572 mm	914 x 495 mm	76 kg	788088
HCSSBFR-36-S	991 x 686 mm	914 x 610 mm	84 kg	886956
HCSSBFR-48-F	1295 x 470 mm	1219 x 394 mm	85 kg	814044
HCSSBFR-48-I	1295 x 572 mm	1219 x 495 mm	89 kg	879480
HCSSBFR-48-S	1295 x 686 mm	1219 x 610 mm	99 kg	1069992

All Hot/Cold Built-In Flush Top Simulated Stone Shelf Models with Remote Condenser/Control Box Feature:

Voltage: 220. Models Shipped with: Shelf assembly with temperature probes, control box and condensing unit (shipped loose), TXV valve (unattached).

HOT/COLD BUILT-IN FLUSH TOP SIMULATED STONE SHELVES WITHOUT CONDENSER

Model	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Hot Side Watts 220V	Approx. Ship Weight	List Price
HCSSBFX-24-F	686 x 470 mm	610 x 394 mm	325	42 kg	₹ 634704
HCSSBFX-24-I	686 x 572 mm	610 x 495 mm	407	44 kg	639912
HCSSBFX-24-S	686 x 686 mm	610 x 610 mm	503	48 kg	647472
HCSSBFX-36-F	991 x 470 mm	914 x 394 mm	485	52 kg	660156
HCSSBFX-36-I	991 x 572 mm	914 x 495 mm	613	56 kg	663264
HCSSBFX-36-S	991 x 686 mm	914 x 610 mm	755	62 kg	762132
HCSSBFX-48-F	1295 x 470 mm	1219 x 394 mm	650	59 kg	689220
HCSSBFX-48-I	1295 x 572 mm	1219 x 495 mm	814	68 kg	754656
HCSSBFX-48-S	1295 x 686 mm	1219 x 610 mm	1006	76 kg	945168

All Hot/Cold Built-In Flush Top Simulated Stone Shelf Models with Unattached Control Panel Only Feature:

Voltage: 220. Models Shipped with: Shelf assembly with temperature probe, solenoid valve (attached to shelf), control panel (shipped loose) TXV valve (unattached).

OPTIONS (available at time of purchase only)

Simulated stone colors – Non-standard colors are non-returnable – Ash Gray Standard –


SS-BIRCH	Birch	No Charge
SS-ICE	Ice	No Charge

COLORS AND FINISHES – INSIDE BACK COVER

COUNTERTOP CUTOUT DIMENSIONS


Model	Width with 10 mm radii	Height with 10 mm radii
HCSSBF(R)(X)-24-F	619 mm	403 mm
HCSSBF(R)(X)-24-I	619 mm	505 mm
HCSSBF(R)(X)-24-S	619 mm	619 mm
HCSSBF(R)(X)-36-F	924 mm	403 mm
HCSSBF(R)(X)-36-I	924 mm	505 mm
HCSSBF(R)(X)-36-S	924 mm	619 mm
HCSSBF(R)(X)-48-F	1226 mm	403 mm
HCSSBF(R)(X)-48-I	1226 mm	505 mm
HCSSBF(R)(X)-48-S	1226 mm	619 mm
Model	Width	Height
Control Box (354 W x 168 H mm)	333 mm	143 mm

ECOIZATION
HCSSBFR models only



Hot/Cold Built-In Flush Top Shelves

Give your operation ultimate flexibility with Hatco's innovative, patented Hot/Cold Shelves Built-In Flush Top. In our signature Hardcoat Aluminum, they easily transition between a heated to cold and cold to heated shelf!

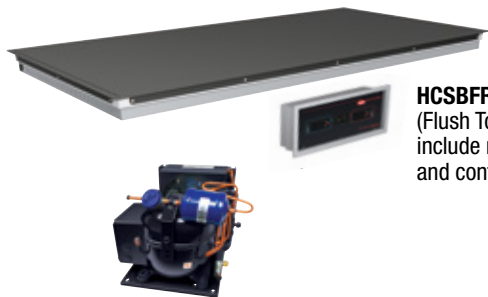

HCSBFR-48-S
(Flush Top) All models include remote condenser and control box



HCSBFX-48-S
(Flush Top) All models include control box only

- Patented thermal break reduces condensation and temperature transfer on adjacent surfaces
- Shelves change modes from hot to cold or vice versa in as little as 30 minutes, allowing quick change for different dayparts
- All models are top mounted with an Hardcoat Aluminum surface
- Units match the Glo-Ray® Built-In Rectangular Heated Shelves with Flush Top (GRSBF) for a fully integrated look
- Control comes standard with a 1219 mm lead wire
- HCSBFR models have unattached Condensing unit and Control Box, HCSBFX models have unattached Control Box only
- HCSBFR condensing unit features easy serviceability with sight glass, service valves, dryer/filter and receiver
- Units have the benefit of allowing fabricators the freedom to design

HOT/COLD BUILT-IN FLUSH TOP SIMULATED STONE SHELVES WITH REMOTE CONDENSER/CONTROL BOX (Hardcoat Aluminum)

Model	Overall Shelf Dimensions W x D	Usable Shelf Space W x D	Approx. Ship Weight	List Price
HCSBFR-24-F	648 x 432 mm	610 x 394 mm	49 kg	₹750792
HCSBFR-24-I	648 x 533 mm	610 x 495 mm	58 kg	769188
HCSBFR-24-S	648 x 648 mm	610 x 610 mm	64 kg	787668
HCSBFR-36-F	953 x 432 mm	914 x 394 mm	71 kg	790944
HCSBFR-36-I	953 x 533 mm	914 x 495 mm	73 kg	800436
HCSBFR-36-S	953 x 648 mm	914 x 610 mm	71 kg	877968
HCSBFR-48-F	1257 x 432 mm	1219 x 394 mm	66 kg	871248
HCSBFR-48-I	1257 x 533 mm	1219 x 495 mm	60 kg	899304
HCSBFR-48-S	1257 x 648 mm	1219 x 610 mm	116 kg	985404

All Hot/Cold Built-In Flush Top Shelf Models with Remote Condenser/Control Box Feature:

Voltage: 220. Models Shipped with: Shelf assembly with temperature probes, control box and condensing unit (shipped loose), TXV valve (unattached).

HOT/COLD BUILT-IN FLUSH TOP SIMULATED STONE SHELVES WITHOUT CONDENSER (Hardcoat Aluminum)

Model	Overall Dimensions W x D	Usable Shelf Space W x D	Hot Side Watts 220V	Approx. Ship Weight	List Price
HCSBFX-24-F	648 x 432 mm	610 x 394 mm	325	34 kg	₹610344
HCSBFX-24-I	648 x 533 mm	610 x 495 mm	407	39 kg	628740
HCSBFX-24-S	648 x 648 mm	610 x 610 mm	503	44 kg	647220
HCSBFX-36-F	953 x 432 mm	914 x 394 mm	485	48 kg	650496
HCSBFX-36-I	953 x 533 mm	914 x 495 mm	613	52 kg	659988
HCSBFX-36-S	953 x 648 mm	914 x 610 mm	755	53 kg	737520
HCSBFX-48-F	1257 x 432 mm	1219 x 394 mm	650	60 kg	730800
HCSBFX-48-I	1257 x 533 mm	1219 x 495 mm	814	58 kg	758856
HCSBFX-48-S	1257 x 648 mm	1219 x 610 mm	1006	63 kg	844956


All Hot/Cold Built-In Flush Top Shelf Models with Unattached Control Panel Only Feature:

Voltage: 220. Models Shipped with: Shelf assembly with temperature probes, solenoid valve (attached to shelf), control panel (shipped loose) and TXV valve (unattached).

COUNTERTOP CUTOUT DIMENSIONS

Model	Width		Height	
	Min.	Max.	Min.	Max.
HCSBF(R)(X)-24-F	625 mm	635 mm	409 mm	419 mm
HCSBF(R)(X)-24-I	625 mm	635 mm	511 mm	521 mm
HCSBF(R)(X)-24-S	625 mm	635 mm	625 mm	635 mm
HCSBF(R)(X)-36-F	930 mm	940 mm	409 mm	419 mm
HCSBF(R)(X)-36-I	930 mm	940 mm	511 mm	521 mm
HCSBF(R)(X)-36-S	930 mm	940 mm	625 mm	635 mm
HCSBF(R)(X)-48-F	1234 mm	1245 mm	409 mm	419 mm
HCSBF(R)(X)-48-I	1234 mm	1245 mm	511 mm	521 mm
HCSBF(R)(X)-48-S	1234 mm	1245 mm	625 mm	635 mm
Control Box (354 W x 168 H mm)	333 mm		143 mm	

ecozation
HCSBFR models only



Glo-Ray® Built-In Rectangular Heated Simulated Stone Shelves

Match the heat zone to your countertops with Hatco's Glo-Ray® Built-In Rectangular Simulated Stone Shelves. The built-in foodsafe shelves are ideal for buffet lines or hors d'oeuvre displays. These unique warmers will safely hold food hot while blending in with your décor.

- Shelves are made of approved foodsafe materials
- Features a lighted rocker switch and thermostatically-controlled heated base
- Includes remote control box with 915 mm conduit and 1829 mm cord and plug
- Models with simulated stone are Swanstone®



GRSSB-3618 in optional Ice simulated stone, built into an Ice simulated stone countertop

Be sure to check out our Hot/Cold and Cold only Built-In Shelves for a seamless look

BUILT-IN RECTANGULAR HEATED SIMULATED STONE SHELVES

Model ^M	Dimensions W x D x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
GRSSB-2418	651 x 498 x 58 mm	220	534	14 kg	₹186732
GRSSB-3018	803 x 498 x 58 mm	220	655	20 kg	194292
GRSSB-3618	955 x 498 x 58 mm	220	782	22 kg	202440
GRSSB-4818	1261 x 498 x 58 mm	220	1068	23 kg	229236
GRSSB-6018	1565 x 498 x 58 mm	220	1310	25 kg	300300
GRSSB-7218	1869 x 498 x 58 mm	220	1564	32 kg	312732

^M Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 93°C. Hatco is not responsible for counter damage caused by heat from the warmer.

All Built-In Rectangular Heated Simulated Stone Shelf Models Feature:

Cord Location: Cord is attached to Control Box.



Standard Control Box

OPTIONS (available at time of purchase only)

Designer Color Bezel (Flush Mount Control Box Bezel for GRSSB models only) – Stainless Steel Standard – Non-standard colors are non-returnable –

RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper	₹4200
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green			

Simulated stone colors – Non-standard colors are non-returnable – Ash Gray Standard –

SS-BIRCH	Birch	SS-ICE	Ice	No Charge
-----------------	-------	---------------	-----	-----------

GRSSB-FLUSH-ITC	Stainless steel Flush Mount Recessed Electronic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 134 D mm)	16968
------------------------	---	-------

GRSSB-FLUSH-TSTAT	Stainless steel Flush Mount Recessed Thermostatic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 115 mm D)	No Charge
--------------------------	---	-----------

COND-6	1829 mm Conduit (914 mm standard) – used with Flush Mount ITC Control Boxes only	\$3864
---------------	--	--------

COND-10	3048 mm Conduit (914 mm standard) – used with Flush Mount ITC Control Boxes only	7476
----------------	--	------

GRSSB-90DEGREE	90° Conduit Connector for main unit	No Charge
-----------------------	-------------------------------------	-----------

GRSSB-REC	Built-in Heated Simulated Stone Shelf with Recessed Top	No Charge
------------------	---	-----------



GRSSB-FLUSH-TSTAT



GRSSB-FLUSH-ITC


COLORS AND FINISHES – INSIDE BACK COVER

BUILT-IN RECTANGULAR HEATED SIMULATED STONE SHELVES CUTOUT DIMENSIONS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
GRSSB-2418	625 mm	632 mm	473 mm	480 mm
GRSSB-3018	778 mm	784 mm	473 mm	480 mm
GRSSB-3618	930 mm	937 mm	473 mm	480 mm
GRSSB-4818	1235 mm	1241 mm	473 mm	480 mm
GRSSB-6018	1540 mm	1546 mm	473 mm	480 mm
GRSSB-7218	1845 mm	1851 mm	473 mm	480 mm

OPTIONAL CONTROL BOX CUTOUT DIMENSIONS

Model	Width	Height	Depth
GRSSB-FLUSH-ITC	149 mm	162 mm	121 mm
GRSSB-FLUSH-TSTAT	149 mm	162 mm	102 mm



Built-In Rectangular Heated Base Glass Shelves

Hatco Heated Base Glass Shelves have a heated ceramic glass top to create uniform heat across the entire surface and are made of approved foodsafe materials. Adjustable thermostatic controls allow surface temperature to be easily controlled.

- Shelves are made of approved foodsafe materials
- Equipped with an attached stainless steel trim mounting ring (optional *Designer Black* or *White* available)
- Lighted On/Off rocker switch
- Includes remote control box with 915 mm conduit and 1829 mm cord and plug

HBGB-3618 with optional White Glass



HBGBH-2418

HBGB-2418 with optional *Designer Black* Trim Ring



BUILT-IN RECTANGULAR HEATED BASE GLASS SHELVES

Model ^M	Dimensions (W x D x H)	Voltage (Single Phase)	Watts	Approx. Ship Weight	List Price
HBGB-2418	651 x 498 x 55 mm	220-230	420-459	15 kg	₹250824
HBGB-3018	803 x 498 x 55 mm	220-230	525-574	17 kg	261408
HBGB-3618	955 x 498 x 55 mm	220-230	630-689	18 kg	272580
HBGB-4818 ≈	1260 x 498 x 55 mm	220-230	840-918	23 kg	298704
HBGB-6018 ≈	1565 x 498 x 55 mm	220-230	1050-1148	29 kg	320208
HBGB-7218 ≈	1870 x 498 x 55 mm	220-230	1260-1378	34 kg	341628

^M Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 93°C. Hatco is not responsible for counter damage caused by heat from the warmer.

≈ Units 1219 mm and greater are constructed of two equal size pieces of glass which create a seam.

All Built-In Rectangular Heated Base Glass Shelf Models Feature:

Temperature Range: 38°-93°C.

Conduit: 915 mm.

Cord location: Cord with plug is attached to Control Box.

BUILT-IN RECTANGULAR HIGH-WATT HEATED BASE GLASS SHELVES

Model ^M	Dimensions (W x D x H)	Voltage (Single Phase)	Watts	Approx. Ship Weight	List Price
HBGBH-2418	651 x 498 x 67 mm	230	634	13 kg	₹257964
HBGBH-3018	803 x 498 x 67 mm	230	809	15 kg	267624
HBGBH-3618	956 x 498 x 67 mm	230	984	17 kg	277704
HBGBH-4818 ≈	1261 x 498 x 67 mm	230	1268	21 kg	302316
HBGBH-6018 ≈	1565 x 498 x 67 mm	230	1618	25 kg	321720
HBGBH-7218 ≈	1870 x 498 x 67 mm	230	1968	29 kg	341796

^M Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 125°C. Hatco is not responsible for counter damage caused by heat from the warmer.

≈ Units 1219 mm and greater are constructed of two equal size pieces of glass which create a seam.

All Built-In Rectangular Heated Base Glass High-Watt Shelf Models Feature:


Cord location: Cord is attached to Control Box.

Conduit: 1829 mm



Standard HBGBH Flush Mount recessed Electronic Control Box with lighted On/Off rocker switch and angled recessed controls (HBGBH models only)

OPTIONS AND ACCESSORIES – PAGE 99





HBGB-2418 mounted into a Swanstone® counter top

OPTIONS (available at time of purchase only)

Ceramic Glass Color – Black Standard – Non-standard colors are non-returnable –

HBGB-GLASS-WHT White (HBGB models only)

No Charge

Designer Color Bezel (Flush Mount Control Box, Bezel only) – Stainless Steel Standard – Non-standard colors are non-returnable –

HBGB-BESEL-BLACK Black

₹4200

HBGB-BESEL-WHITE White (HBGB models only)

4200

Trim Ring Color – Stainless Steel Standard – Non-standard colors are non-returnable –

HBGB-TRIM-BLK Designer Black

3948

HBGB-TRIM-WHITE White (HBGB models only)

3948

HBGBH-NO-TRIM Unit without Trim Ring – HBGBH models only

No Charge

HBGB-FLUSH-ITC Stainless steel Flush Mount Recessed Electronic Control Box with lighted On/Off rocker switch and angled recessed controls – HBGB models only (standard on HBGBH models) (162 W x 198 H x 134 D mm)

₹16968

HBGB-FLUSH-TSTAT Stainless steel Flush Mount Recessed Thermostatic Control Box with lighted On/Off rocker switch and angled recessed controls – HBGB models only (162 W x 198 H x 115 mm D)

No Charge

COND-6 1829 mm Conduit (914 mm standard) – used with Flush Mount ITC Control Boxes only – HBGB only (standard on HBGBH models)

₹3864

COND-10 3048 mm Conduit in lieu of standard conduit – used with Flush Mount ITC Control Boxes only

7476

HBGB-REC Built-In Heated Base Glass Shelf with Recessed Top – HBGB models only

No Charge



HBGB-FLUSH-ITC



HBGB-FLUSH-TSTAT

HEATED AND HIGH-WATT HEATED BASE GLASS SHELF COUNTERTOP CUTOUT DIMENSIONS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
HBGB, HBGBH-2418	625 mm	632 mm	473 mm	480 mm
HBGB, HBGBH-3018	778 mm	784 mm	473 mm	480 mm
HBGB, HBGBH-3618	930 mm	937 mm	473 mm	480 mm
HBGB, HBGBH-4818	1235 mm	1241 mm	473 mm	480 mm
HBGB, HBGBH-6018	1540 mm	1546 mm	473 mm	480 mm
HBGB, HBGBH-7218	1845 mm	1851 mm	473 mm	480 mm

CONTROL BOX CUTOUT DIMENSIONS

Model	Width	Height	Depth
HBGB (GRSB)-FLUSH-ITC	149 mm	162 mm	121 mm
HBGB (GRSB)-FLUSH-TSTAT	149 mm	162 mm	102 mm
HBGBH Standard Box			

Glo-Ray® Built-In Rectangular Recessed Top Heated Shelves

Let Hatco add heat to your serving surface with the Glo-Ray® Built-In Rectangular Recessed Top Heated Shelf. This 13 mm recessed top foodwarmer has a Hardcoat Aluminum top and blanket-type element for uniform heat to extend your food holding time.

- Uniform heat distribution with Hardcoat Aluminum top and blanket-type element
- 914 mm flexible conduit channels power lines from the shelf to a control box
- Standard controller includes, infinite switch, lighted rocker switch and mounting brackets
- Thermostatically-controlled heated base
- For use in countertops up to 32 mm thick



Standard Control Box



GRSB-24-I

NOTE: For any size GRSB, the next larger size GRAH Strip Heater will fit over the top. For example, a GRSB-30 will require a GRAH-36. The GRAH will have a tight fit to the frame of the base.

BUILT-IN RECTANGULAR HEATED SHELVES WITH RECESSED TOP

Model ^M	Dimensions	Cut-Out Dimensions		220V Watts	Approx. Ship Weight	List Price
	W x D x H	Min.-Max. Width	Min.-Max. Depth			
GRSB-24-F	648 x 432 x 73 mm	622-629 mm	406-413 mm	384	11 kg	₹156324
GRSB-24-I	648 x 533 x 73 mm	622-629 mm	508-514 mm	550	13 kg	156912
GRSB-30-F	800 x 432 x 73 mm	775-781 mm	406-413 mm	722	11 kg	166404
GRSB-30-I	800 x 533 x 73 mm	775-781 mm	508-514 mm	462	13 kg	167076
GRSB-36-F	953 x 432 x 73 mm	927-933 mm	406-413 mm	655	13 kg	176820
GRSB-36-I	953 x 533 x 73 mm	927-933 mm	508-514 mm	916	14 kg	177576
GRSB-36-O	953 x 800 x 73 mm	927-933 mm	775-781 mm	540	17 kg	206052
GRSB-42-F	1105 x 432 x 73 mm	1080-1086 mm	406-413 mm	780	14 kg	185472
GRSB-42-I	1105 x 533 x 73 mm	1080-1086 mm	508-514 mm	1110	17 kg	186396
GRSB-48-F	1257 x 432 x 73 mm	1232-1238 mm	406-413 mm	627	15 kg	195300
GRSB-48-I	1257 x 533 x 73 mm	1232-1238 mm	508-514 mm	885	18 kg	196224
GRSB-48-O	1257 x 800 x 73 mm	1232-1238 mm	775-781 mm	1236	31 kg	243516
GRSB-54-I	1410 x 533 x 73 mm	1384-1391 mm	508-514 mm	705	18 kg	205884
GRSB-60-F	1562 x 432 x 73 mm	1537-1543 mm	406-413 mm	1000	18 kg	215292
GRSB-60-I	1562 x 533 x 73 mm	1537-1543 mm	508-514 mm	1430	20 kg	216216
GRSB-60-O	1562 x 800 x 73 mm	1537-1543 mm	775-781 mm	1110	29 kg	282744
GRSB-66-I	1715 x 533 x 73 mm	1689-1695 mm	508-514 mm	870	24 kg	224196
GRSB-72-F	1867 x 432 x 73 mm	1842-1848 mm	406-413 mm	1034	20 kg	232512
GRSB-72-I	1867 x 533 x 73 mm	1842-1848 mm	508-514 mm	1440	23 kg	233520
GRSB-72-O	1867 x 800 x 73 mm	1842-1848 mm	775-781 mm	2070	31 kg	322308


^M Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 93°C. Hatco is not responsible for counter damage caused by heat from the warmer.

All Built-In Rectangular Heated Shelf Models with Recessed Top Feature:

Usable Heated Shelf Space: Width of unit minus 38 mm x depth of unit minus 38 mm.

Cord location: Cord is attached to Control Box.

OPTIONS AND ACCESSORIES – PAGE 101





OPTIONS (available at time of purchase only)

Designer Color Bezel (Flush Mount Control Box, Bezel only) – Stainless Steel Standard –

Non-standard colors are non-returnable –

RED	Warm Red	₹3948
BLACK	Black	3948
GRAY	Gray Granite	3948
WHITE	White Granite	3948
NAVY	Navy Blue	3948
GREEN	Hunter Green	3948
COPPER	Antique Copper	3948

GRSB-FLUSH-ITC	Stainless steel Flush Mount Recessed Electronic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 134 D mm)	₹16800
----------------	---	--------

GRSB-FLUSH-TSTAT	Stainless steel Flush Mount Recessed Thermostatic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 115 mm D)	No Charge
------------------	---	-----------

ACCESSOIRES (available for purchase at any time)

Stainless Steel Channel Dividers for GRSB models –

Required to keep Rods in place – includes front and back Dividers –

GRSB-CD-24	For GRSB-24 models	₹ 5040
GRSB-CD-30	For GRSB-30 models	6636
GRSB-CD-36	For GRSB-36 models	8400
GRSB-CD-42	For GRSB-42 models	9828
GRSB-CD-48	For GRSB-48 models	11676
GRSB-CD-54	For GRSB-54 models	13356
GRSB-CD-60	For GRSB-60 models	14952
GRSB-CD-66	For GRSB-66 models	16716
GRSB-CD-72	For GRSB-72 models	18396

Stainless steel Rods – sold individually –

GRSB-DIV-F	For F depth units	each ₹2268
GRSB-DIV-I	For I depth units	each 2436
GRSB-DIV-O	For O depth units	each 2856

FOOD PANS AND TRIVETS – PAGE 155


COLORS AND FINISHES – INSIDE BACK COVER



GRSB-FLUSH-ITC



GRSB-FLUSH-TSTAT

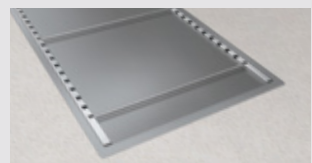

GRSB-72-I with Channel Dividers (vertical, with notches) and Rods (horizontal)

CONTROL BOX CUTOUT DIMENSIONS

Model	Width	Height	Depth
GRSB-FLUSH-ITC	149 mm	162 mm	121 mm
GRSB-FLUSH-TSTAT	149 mm	162 mm	102 mm



Glo-Ray® Built-In Rectangular Flush Top Heated Shelves

Let Hatco add heat to your serving surface with the Glo-Ray® Built-in Heated Shelf. This flush surface foodwarmer has a Hardcoat Aluminum top and blanket-type element for uniform heat to extend your food holding time.

- Uniform heat distribution with Hardcoat Aluminum top and blanket-type element
- 914 mm flexible conduit channels power lines from the shelf to a control box
- Standard controller includes, infinite switch, lighted rocker switch and mounting brackets
- Thermostatically-controlled heated base
- Model widths from: 648 to 1867 mm
- Optional stainless steel surface
- For use in countertops up to 32 mm thick

Standard Control Box



Be sure to check out our Hot/Cold and Cold only Built-In Shelves for a seamless look

NOTE: For any size GRSBF, the next larger size GRAH Strip Heater will fit over the top. For example, a GRSBF-30 will require a GRAH-36. The GRAH will have a tight fit to the frame of the base.

GRSBF-60-0 built into a simulated stone countertop with accessory food pans shown below a GR2AL-96D Strip Heater in *Designer* color with optional sneeze guards

BUILT-IN RECTANGULAR HEATED SHELVES WITH FLUSH TOP

Model ^M	Dimensions W x D x H	Min. -Max. Width	Min. -Max. Depth	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
GRSBF-24-F	648 x 432 x 57 mm	622-629 mm	406-413 mm	220	384	13 kg	₹156324
GRSBF-24-I	648 x 533 x 57 mm	622-629 mm	508-514 mm	220	550	12 kg	156912
GRSBF-24-S	648 x 648 x 57 mm	622-629 mm	622-629 mm	220	640	15 kg	166152
GRSBF-30-F	800 x 432 x 57 mm	775-781 mm	406-413 mm	220	462	11 kg	166404
GRSBF-30-I	800 x 533 x 57 mm	775-781 mm	508-514 mm	220	665	14 kg	167076
GRSBF-30-S	800 x 648 x 57 mm	775-781 mm	622-629 mm	220	755	15 kg	179844
GRSBF-36-F	953 x 432 x 57 mm	927-933 mm	406-413 mm	220	540	15 kg	176820
GRSBF-36-I	953 x 533 x 57 mm	927-933 mm	508-514 mm	220	780	14 kg	177576
GRSBF-36-S	953 x 648 x 57 mm	927-933 mm	622-629 mm	220	870	16 kg	200004
GRSBF-36-O	953 x 800 x 57 mm	927-933 mm	775-781 mm	220	1110	17 kg	206052
GRSBF-42-F	1105 x 432 x 57 mm	1080-1086 mm	406-413 mm	220	627	17 kg	185472
GRSBF-42-I	1105 x 533 x 57 mm	1080-1086 mm	508-514 mm	220	885	15 kg	186396
GRSBF-42-S	1105 x 648 x 57 mm	1080-1086 mm	622-629 mm	220	1006	18 kg	218904
GRSBF-48-F	1257 x 432 x 57 mm	1232-1238 mm	406-413 mm	220	705	16 kg	195300
GRSBF-48-I	1257 x 533 x 57 mm	1232-1238 mm	508-514 mm	220	1000	18 kg	196224
GRSBF-48-S	1257 x 648 x 57 mm	1232-1238 mm	622-629 mm	220	1121	19 kg	235368
GRSBF-48-O	1257 x 800 x 57 mm	1232-1238 mm	775-781 mm	220	1430	22 kg	243516
GRSBF-60-F	1562 x 432 x 57 mm	1537-1543 mm	406-413 mm	220	870	19 kg	215292
GRSBF-60-I	1562 x 533 x 57 mm	1537-1543 mm	508-514 mm	220	1220	22 kg	216216
GRSBF-60-S	1562 x 648 x 57 mm	1537-1543 mm	622-629 mm	220	1372	25 kg	275100
GRSBF-60-O	1562 x 800 x 57 mm	1537-1543 mm	775-781 mm	220	1750	29 kg	282744
GRSBF-72-F	1867 x 432 x 57 mm	1842-1848 mm	406-413 mm	220	1034	20 kg	232512
GRSBF-72-I	1867 x 533 x 57 mm	1842-1848 mm	508-514 mm	220	1440	24 kg	233520
GRSBF-72-S	1867 x 648 x 57 mm	1842-1848 mm	622-629 mm	220	1602	27 kg	309708
GRSBF-72-O	1867 x 800 x 57 mm	1842-1848 mm	775-781 mm	220	1894	31 kg	322308


^M Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 93°C. Hatco is not responsible for counter damage caused by heat from the warmer.

All Built-In Rectangular Heated Shelf Models with Flush Top Feature:

Usable Heated Shelf Space: Width of unit minus 38 mm x depth of unit minus 38 mm.

Cord location: Cord is attached to Control Box.

OPTIONS AND ACCESSORIES – PAGE 103

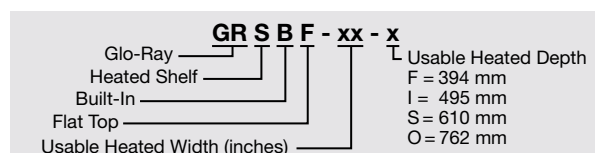



OPTIONS *(available at time of purchase only)*

Designer Color Bezel (Flush Mount Control Box, Bezel only) – Stainless Steel Standard – Non-standard colors are non-returnable –

RED	Warm Red	₹3948
BLACK	Black	3948
GRAY	Gray Granite	3948
WHITE	White Granite	3948
NAVY	Navy Blue	3948
GREEN	Hunter Green	3948
COPPER	Antique Copper	3948
GRSBF-SS	Stainless Steel Surface in lieu of Hardcoat Aluminum (GRSBF models only)	No Charge
GRSBF-FLUSH-ITC	Stainless steel Flush Mount Recessed Electronic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 134 D mm)	₹16800
GRSBF-FLUSH-TSTAT	Stainless steel Flush Mount Recessed Thermostatic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 115 mm D)	No Charge

FOOD PANS AND TRIVETS – PAGE 155
COLORS AND FINISHES – INSIDE BACK COVER



GRSBF-FLUSH-ITC



GRSBF-FLUSH-TSTAT

CONTROL BOX CUTOUT DIMENSIONS

Model	Width	Height	Depth
GRSBF-FLUSH-ITC	149 mm	162 mm	121 mm
GRSBF-FLUSH-TSTAT	149 mm	162 mm	102 mm

Drawer Warmers



DRAWERMAX® Drawer Warmers

Hatco's Heated DRAWERMAX® is built to excel in a tough kitchen environment. Hold everything from meat to vegetables to rolls in the Hatco Heated DRAWERMAX. Built for tough kitchen duty with rugged construction and heavy-duty hardware, these warmers keep a variety of foods hot and fresh until served.

- Units come in Freestanding or Built-in
- Independent temperature control and ON/OFF power switch on each drawer
- Heavy-duty construction with durable drawer frame and slides
- Includes 1 full-size stainless steel 150 mm food pan for each drawer
- Adjustable vents control moisture on each drawer
- Angled chrome handle deflects cart traffic
- Easy to clean, black powdercoated exterior (Freestanding units only)

HDM-2



HDM-3N



DRAWERMAX® DRAWER WARMERS - FREESTANDING AND BUILT-IN

Model	Dimensions [‡] (W x D x H)	Voltage Single Phase 50/60 Hz	Watts	Amps	Approx. Ship Weight Includes weight of pans	List Price
Freestanding						
HDM-1	749 x 576 x 279 mm	220-240	450-535	2.0-2.2	44 kg	₹101220
HDM-2	749 x 576 x 513 mm	220-240	900-1071	4.1-4.5	76 kg	180096
HDM-3	749 x 576 x 748 mm	220-240	1350-1606	6.1-6.7	105 kg	242004
Freestanding - Narrow						
HDM-1N	530 x 686 x 279 mm	220-240	450-535	2.0-2.2	44 kg	₹109200
HDM-2N	530 x 686 x 513 mm	220-240	900-1071	4.1-4.5	76 kg	179172
HDM-3N	530 x 686 x 748 mm	220-240	1350-1606	6.1-6.7	105 kg	284424
Built-In						
HDM-1B	743 x 568 x 277 mm	220-240	450-535	2.0-2.2	40 kg	₹ 97272
HDM-2B	743 x 568 x 512 mm	220-240	900-1071	4.1-4.5	72 kg	176316
HDM-3B	743 x 568 x 747 mm	220-240	1350-1606	6.1-6.7	101 kg	242676
Built-In - Narrow						
HDM-1BN	523 x 679 x 276 mm	220-240	450-535	2.0-2.2	40 kg	₹100548
HDM-2BN	523 x 679 x 511 mm	220-240	900-1071	4.1-4.5	72 kg	172032
HDM-3BN	523 x 679 x 746 mm	220-240	1350-1606	6.1-6.7	101 kg	248556

‡ Add 102 mm to Height for units with standard 102 mm plastic legs, add 152 mm for units with 152 mm legs. Add 35 mm to Depth for drawer handle.

All Drawer Warmer Models Feature:

Cord Location: Back of unit, lower left corner.

OPTIONS (available at time of purchase only)

Stainless Steel unit color – Designer Black Standard – Non-standard colors are non-returnable

SS1	One Drawer Freestanding models only	₹ 4872
SS2	Two Drawer Freestanding models only	7812
SS3	Three Drawer Freestanding models only	11760


Control Options – Therm Control Standard

ITC No Charge

ACCESSORIES (available for purchase at any time)

HDM-TRIVET	Custom Trivet (445 x 242 x 13 mm) raises food product 13 mm off bottom of full size pan	₹ 5544
HDM-CASTER-3	76 mm diameter Locking Casters – all swivel, all lock – adds 102 mm to height of unit (HDM-1, -2, -3 models only)	22512
HDM-SPILL	Water/Spillage Pan – one per drawer	25368
HDM-SPLASH	Splash Baffle – one per drawer	5040
HDM-6" PAN	Stainless Steel Food Pan – one per drawer	4704

FOOD PANS AND TRIVETS – PAGE 155



Heated Drawer Warmers with Top Control

Hatco Drawer Warmers ensure optimal holding of a variety of products at safe temperatures, while minimizing moisture loss and texture change. Our unique blanket element design promotes uniform temperatures throughout the cavity. Each drawer features adjustable sliding vents. Touchscreen controller controls temperature and time for each drawer individually.

- Top-of-the-unit touchscreen controller is positioned at an angle for greater visibility
- Controller provides individual temperature control and hold timer for each drawer with visual and audio alerts
- Robust stainless steel construction inside and out
- Drawer frame is constructed of heavy duty, 12 gauge stainless steel and drawers slide on durable nylon rollers
- Easy-to-clean seamless interior core
- Snap out side panels make this unit easy to clean and service
- Drawer frame can accommodate varying pan configurations, including 1/1 GN, 1/3 GN, up to 152 mm deep, with or without lids
- Pans lift straight up, eliminating the need to tilt pan for removal
- USB port for easy software updates
- Unit comes standard with 102 mm plastic legs

HDWTC-2
shown with Accessory
51 mm casters (102 mm
plastic legs are standard)



HEATED DRAWER WARMERS WITH TOP CONTROL

Model	Dimensions** W x D x H	Voltage	Watts	Aprox. Ship Weight	List Price
HDWTC-1	622 x 653 x 296 mm	220 - 240	323 - 384	55 kg	₹390768
HDWTC-2	622 x 653 x 509 mm	220 - 240	645 - 766	81 kg	564732
HDWTC-3	622 x 653 x 722 mm	220 - 240	966 - 1148	99 kg	741300

** Add 35 mm to depth for drawer handles. Height does not include standard 102 mm plastic legs.

All Heated Drawer Warmer Models With Top Control Feature:

Models Shipped with: One 152 mm deep food pan per drawer, 102 mm plastic legs, 1829 mm cord and plug.

Cord Location: Top, back-left side, recessed to protect plug.


OPTIONS (available at time of purchase only)

OS-PAN	Oversized Drawer Frame and Pan (508 x 381 x 127 mm) in lieu of Standard Drawer with Pan	per drawer	₹13608
---------------	---	------------	--------

ACCESSORIES (available for purchase at any time)

HDW-TRIVET	Custom Trivet (445 x 242 x 13 mm) raises food product 13 mm off bottom of full size pan	₹ 5880
HDW 6" LEG	152 mm adjustable stainless steel Legs	18648
HDW-CASTER-2	51 mm diameter Casters – all swivel, 2 lock – adds 64 mm to height of unit	22764
HDW-CASTER-3	76 mm diameter Locking Casters – all swivel, all lock – adds 108 mm to height of unit	22764
HDW-CASTER-5	127 mm diameter Locking Casters – all swivel, all lock – adds 159 mm to height of unit	27300

FOOD PANS AND TRIVETS – PAGE 155



Convected Drawer Warmer

This Hatco unit is designed to keep a variety of food products hot and flavor-fresh until served. With a single non-humidified cavity and a single electronic temperature control, this unit provides even, dry heat for food products that do not require humidity. With insulated top, sides and back, these Drawer Warmers provide excellent energy efficiency.

- Digital electronic controller for easy programming
- Low velocity convected air system provides even temperature throughout the cabinet
- Tough, solid chrome handles are angled to avoid contact from passing carts
- Narrow width fits most kitchen footprints
- Heavy-duty drawer slides with nylon rollers
- Includes three full-size pans
- Provides even, dry heat for food products that do not require humidity.
- Anti-tip bracket and hardware or deck mount legs included



CDW-3N

Drawer Warmers

CONVECTED DRAWER WARMER					
Model	Dimensions** W x D x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
CDW-3N	421 x 698 x 762 mm	230	933	81 kg	₹508620


** Add 35 mm for drawer handle. Add 64 mm to height for standard 51 mm casters

All Convected Drawer Warmer Models Feature:

Models Shipped with: One 152 mm deep food pan per drawer, low profile 51 mm casters, 1829 mm cord and plug.

Cord Location: Back of unit, top right corner.

FOOD PANS AND TRIVETS – PAGE 155



Drawer Warmers

Hold everything from meat to vegetables to rolls in Hatco Drawer Warmers. Built for tough kitchen duty with rugged construction and heavy-duty hardware, these warmers keep a variety of foods hot and fresh until served.

- HDW -1,-2,-3 models come in standard and narrow widths, HDW-4 comes in standard width only
- 1-, 2-, 3- or 4-drawer freestanding or 1-, 2- or 3 split drawer models
- Completely insulated individual cavities provide maximum energy efficiency (excludes HDW-1R2,-2R2)
- Each drawer has a recessed individual thermostatic control, temperature monitor, vent slides and power switch
- 12-gauge stainless steel heavy-duty drawer slides with nylon rollers
- Standard width Drawer Warmer pans lift straight out of drawer (HDW-1N, -2N, -3N and HDW-1R2, -1.5R2, -2R2 models require tipping the pan to install)

Optional touchscreen control



Drawer Temperature



Temperature Adjustment



Drawer Timer



HDW-2 with optional touchscreen control and Accessory 152 mm stainless steel legs



HDW-1.5R2 with optional touchscreen control



HDW-2R2



HDW-2N



HDW-1R2

FREESTANDING DRAWER WARMERS

Model	Dimensions	Voltage	Watts	Approx.	List Price	
	W x D ↔ x H			Ship Weight	With pans	Without pans
	Height excludes legs/casters	Single Phase		Includes weight of pans		
Standard						
HDW-1	749 x 575 x 279 mm	220	450	44 kg	₹258888	₹254688
HDW-2	749 x 575 x 537 mm	220	900	76 kg	437136	428736
HDW-3	749 x 575 x 794 mm	220	1350	105 kg	615888	603288
HDW-4	749 x 575 x 1051 mm	220	1800	135 kg	811860	795060
Narrow						
HDW-1N	530 x 686 x 279 mm	220	450	44 kg	₹258888	₹254688
HDW-2N	530 x 686 x 537 mm	220	900	76 kg	437136	428736
HDW-3N	530 x 686 x 794 mm	220	1350	105 kg	615888	603288

↔ Add 35 mm to depth for drawer handle.

All Freestanding Drawer Warmer Models Feature:

HDW-1, -2, and -3 and all Narrow models shipped with: 102 mm plastic legs, 1829 mm cord and plug.

HDW-4 Shipped with: 152 mm stainless steel legs, 1829 mm cord and plug.

Models w/Pans Shipped with: One 152 mm deep food pan per drawer.

Cord Location: Back of unit, lower left corner.

SPLIT DRAWER WARMERS

Model	Dimensions W x D ↔ x H	Voltage Single Phase	Watts	Approx. Ship Weight Includes weight of pans	List Price	
	Height excludes legs/casters				With pans	Without pans
HDW-1R2	733 x 419 x 378 mm	230	634	41 kg	₹373044	₹368844
HDW-1.5R2	733 x 419 x 494 mm	230	909	53 kg	529704	523404
HDW-2R2	733 x 419 x 610 mm	230	1185	61 kg	581448	573048

↔ Add 35 mm to depth for drawer handle.

All Split Drawer Warmers Models Feature:

Cord Location: Back of unit, lower left corner.

Pan Capacity: 527W x 324D x 64H mm.



HDW-1R2 Shipped with: Two 527 x 324 x 64 mm food pans, four 102 mm legs, 1829 mm cord and plug.

HDW-1.5R2 Shipped with: Three 527 x 324 x 64 mm food pans, four 102 mm legs, 1829 mm cord and plug.

HDW-2R2 Shipped with: Four 527 x 324 x 64 mm food pans, four 102 mm legs, 1829 mm cord and plug.

OPTIONS AND ACCESSORIES – PAGE 110

FOOD PANS AND TRIVETS – PAGE 155

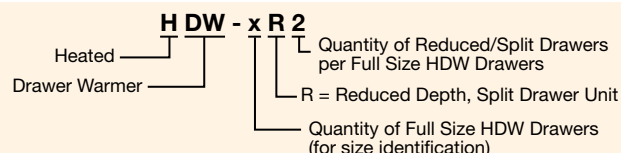

Drawer Warmers

Hold everything from meat to vegetables to rolls in Hatco Drawer Warmers. Built for tough kitchen duty with rugged construction and heavy-duty hardware, these warmers keep a variety of foods hot and fresh until served.

- Standard and narrow widths
- 1-, 2- or 3-drawer built-in models
- Completely insulated individual cavities provide maximum energy efficiency
- Each drawer has a recessed individual thermostatic control, temperature monitor, vent slides and power switch
- 12-gauge stainless steel heavy-duty drawer slides with nylon rollers
- Standard width Drawer Warmer pans lift straight out of drawer (HDW-1BN, -2BN and -3BN models require tipping the pan to install)

Optional touchscreen control



Drawer Temperature



Temperature Adjustment



Drawer Timer

HDW-3B



HDW-2B



BUILT-IN DRAWER WARMERS

Model	Dimensions	Voltage	Watts	Approx. Ship Weight	List Price	
	W x D↔ x H				With pans (standard)	Without pans
	Height excludes front mounting flange	Single Phase		Includes weight of pans		
Standard						
HDW-1B	715 x 568 x 248 mm	220	450	40 kg	₹249228	₹245028
HDW-2B	715 x 568 x 506 mm	220	900	72 kg	418908	410508
HDW-3B	715 x 568 x 763 mm	220	1350	106 kg	588420	575820
Narrow						
HDW-1BN	494 x 679 x 248 mm	220	450	40 kg	₹249228	₹245028
HDW-2BN	494 x 679 x 506 mm	220	900	72 kg	418908	410508
HDW-3BN	494 x 679 x 763 mm	220	1350	106 kg	588420	575820

↔ Add 35 mm to depth for drawer handle.

All Built-In Drawer Warmer Models Feature:

Models Shipped with: Conduit.

Models w/Pans Shipped with: One 152 mm deep food pan per drawer.


OPTIONS AND ACCESSORIES – PAGE 110

FOOD PANS AND TRIVETS – PAGE 155

BUILT-IN DRAWER WARMER CUT-OUT REQUIREMENTS

Model	"W" Dimension	"D" Dimension [▲]	"H" Dimension
HDW-1B	720 mm	610 mm	257 mm
HDW-2B	720 mm	610 mm	514 mm
HDW-3B	720 mm	610 mm	771 mm
HDW-1BN	500 mm	720 mm	257 mm
HDW-2BN	500 mm	720 mm	514 mm
HDW-3BN	500 mm	720 mm	771 mm

[▲] Depth dimension includes 38 mm for conduit connector.



OPTIONS (available at time of purchase only)

Designer Drawer Front Colors per Drawer – Non-standard colors are non-returnable –

RED	Warm Red	₹6720
BLACK	Black	6720
GRAY	Gray Granite	6720
WHITE	White Granite	6720
NAVY	Navy Blue	6720
GREEN	Hunter Green	6720
COPPER	Antique Copper	6720
HDW-TTC	Temperature Control Timer – 6-channel control touchscreen display	₹59808
RD-NOVENT	No Drawer Vents (HWD-1R2, -1.5R2, -2R2 only)	No Charge
OS-PAN	Oversized Drawer Frame and Pan (508 x 381 x 127 mm) in lieu of Standard Drawer with Pan (standard width models only)	per drawer 13608
BIS DRAWER	Biscuit Pan Drawer (accommodates two 457 x 330 mm Half-Size Sheet Pans – not included) in lieu of standard Drawer with Pan (standard width models only)	per drawer No Charge
HDW-CHIP	Chip Guard	4452

ACCESSORIES (available for purchase at any time)

HDW 6" LEG	152 mm Adjustable Stainless Steel Legs (standard on HDW-4)	₹18648
HDW-CASTER-2	51 mm diameter Casters – all swivel, 2 lock – adds 57 mm to height of unit (HDW-1, -2, -3 models only)	22764
HDW-CASTER-3	76 mm diameter Locking Casters – all swivel, all lock – adds 108 mm to height of unit (HDW-1, -2, -3 models only)	22764
HDW-CASTER-5	127 mm diameter Locking Casters – all swivel, all lock – adds 159 mm to height of unit	27300
HDW-TRIVET	Custom Trivet (445 x 242 x 13 mm) raises food product 13 mm off bottom of full size pan	5880
HDW-SPILL	Water/Spillage Pan – one per drawer (excludes BIS Drawer and OS-Pan Options)	25872
HDW-SPLASH	Splash Baffle – one per drawer (excludes BIS Drawer and OS-Pan Options)	5460
ST PAN 2	Stainless Steel Food Pan – 527 x 324 x 64 mm	7812
HDW 6" PAN	Stainless Steel Food Pan – 527 x 324 x 152 mm	10668

FOOD PANS AND TRIVETS – PAGE 155




HDW-TTC Option
Shown: Temperature adjustment and timer touchscreen control




BIS DRAWER Option
Biscuit Pan Drawer (pans not included)




HDW 6" LEG accessory



HDW-SPLASH accessory




Prevents chips from reaching the element
D. Heat Shield (included)
E. Heating Element (included)
F. Chip Guard **HDW-CHIP** Option (standard width shown)



Additional Humidity
A. Stainless Steel Food Pan (included)
B. Splash Baffle
HDW-SPLASH Accessory
C. Water/Spillage Pan (add 6 mm of water)
HDW-SPILL Accessory



CASTERS accessory
HDW-CASTER-2 All swivel, 2 lock
HDW-CASTER-3 All swivel, all lock
HDW-CASTER-5 All swivel, all lock



HDW-TRIVET accessory

Heated Merchandisers



Glo-Ray® Merchandising Warmers

Designed with both a slanted and horizontal shelf, Glo-Ray® Merchandising Warmers offer the convenience of customer self-serve with the efficiency of preparing product in advance, and holding for peak serving periods.

- Warmer includes a slant and horizontal shelf for merchandising a variety of products like popcorn on the top shelf and nachos, boxed pizza or wrapped food on the bottom
- Standard Indicating Temperature Control (ITC) enhances accuracy and provides digital readout of temperatures
- Thermostatically-controlled hardcoated heated base to extend holding times
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Product divider rods and 102 mm legs included
- Shatter-resistant incandescent lights illuminate the holding areas and emphasize the product



GRSDS/H-36D with slant and horizontal shelf and optional 381 mm clearance top shelf



GRSDS/H-41D with slant and horizontal shelf

SLANT/HORIZONTAL DISPLAY WARMERS – DUAL SHELVES – TOP AND BASE HEAT

Model	No. of Bulbs, Divider Rods Per Shelf	Dimensions W x D x H	Voltage Single Phase	Watts	Amps	Approx. Ship Weight	List Price
GRSDS/H-36D	4, 7	914 x 616 x 851 mm	220	1669	7.6	72 kg	₹675528
GRSDS/H-41D	6, 8	1041 x 616 x 851 mm	220	1951	8.9	83 kg	722568

All Slant/Horizontal Shelf Display Warmer Models Feature:

Cord Location: 1829 mm. Control side at right base corner.

Front opening dimension, Top: 305 H mm.°

Bottom: 264 H mm.

OPTIONS (available at time of purchase only)

**Designer Colors – Non-standard colors are non-returnable –
Stainless Steel Standard – Glossy Gray standard –**


RED	Warm Red	₹42504
BLACK	Black	42504
GRAY	Gray Granite	42504
WHITE	White Granite	42504
NAVY	Navy Blue	42504
GREEN	Hunter Green	42504
COPPER	Antique Copper	42504
15SPACE	381 mm clearance for top shelf in lieu of standard 305 mm	₹12348

COLORS AND FINISHES – INSIDE BACK COVER

ACCESSORIES (available for purchase at any time)

GRSDS-DIV	Additional Stainless Steel Divider Rods (bottom shelf only)	each	₹2520
GRSDH-DIV	Additional Stainless Steel Divider Rods (top shelf only)	each	2520

GRSDS/H - x x D



Glo-Ray® Merchandising Warmers

Designed specifically for showcasing wrapped or boxed product, Hatco Glo-Ray® Merchandising Warmers hold hot food safely at proper serving temperatures. These warmers offer the convenience of self-serve and the efficiency of kitchen-to-server, holding product in advance for peak serving periods.

- Available in single- or two-tier models
- Horizontal or slant shelves
- Product divider rods sort food displays
- Thermostatically-controlled hardcoated heated base, with a temperature range of 85°- 93°C, to extend holding times

- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Shatter-resistant incandescent lights illuminate the holding areas and emphasize the product



GRSDH-30
Horizontal single shelf



GRSDS-24D
Dual slant shelf
with optional
sign holders
(signs not
included)

HORIZONTAL DISPLAY WARMERS

Model	No. of Bulbs, Divider Rods	Dimensions (W x D x H) Height includes legs	Voltage Single Phase	Usable Heated Shelf Space (W x D)	Watts	Approx. Ship Weight	List Price
Single Shelf							
GRSDH-24	2, 5	610 x 495 x 303 mm	220	577 x 419 mm	724	22 kg	₹285852
GRSDH-30	2, 6	762 x 495 x 303 mm	220	730 x 419 mm	890	25 kg	311388
GRSDH-36	2, 7	914 x 495 x 303 mm	220	882 x 419 mm	1074	30 kg	337008
GRSDH-41	3, 8	1041 x 495 x 379 mm	220	1009 x 419 mm	1228	34 kg	366744
GRSDH-52	4, 10	1321 x 495 x 379 mm	220	1289 x 419 mm	1604	39 kg	427560
GRSDH-60	5, 12	1524 x 495 x 379 mm	220	1492 x 419 mm	1830	60 kg	481236
Dual Shelf							
GRSDH-24D	4, 10	610 x 495 x 303 mm	220	577 x 419 mm	1448	40 kg	₹498792
GRSDH-30D	4, 12	762 x 495 x 643 mm	220	730 x 419 mm	1780	45 kg	517272
GRSDH-36D	4, 14	914 x 495 x 643 mm	220	882 x 419 mm	2148	54 kg	547428
GRSDH-41D	6, 16	1041 x 495 x 643 mm	220	1009 x 419 mm	2456	62 kg	581448
GRSDH-52D*	8, 20	1321 x 495 x 643 mm	220	1289 x 419 mm	3208	78 kg	669396
GRSDH-60D*	10, 24	1524 x 495 x 643 mm	220	1492 x 419 mm	3660	89 kg	737520

* Cord without plug.

All Horizontal Single and Dual Shelf Display Warmer Models Feature:

Cord Location: 1829 mm. Left rear corner toward server side.

SLANT DISPLAY WARMERS


Model	No. of Bulbs, Divider Rods	Dimensions (W x D x H) Height includes legs	Voltage Single Phase	Usable Heated Shelf Space (W x D)	Watts	Approx. Ship Weight	List Price
Single Shelf							
GRSDS-24	2, 5	610 x 616 x 469 mm	220	572 x 533 mm	629	36 kg	₹343140
GRSDS-30	2, 6	762 x 616 x 469 mm	220	724 x 533 mm	730	36 kg	367668
GRSDS-36	2, 7	914 x 616 x 545 mm	220	876 x 533 mm	864	42 kg	395808
GRSDS-41	3, 8	1041 x 616 x 545 mm	220	1003 x 533 mm	1003	44 kg	424536
GRSDS-52	4, 10	1321 x 616 x 545 mm	220	1283 x 533 mm	1275	50 kg	486696
GRSDS-60	5, 12	1524 x 616 x 545 mm	220	1486 x 533 mm	1665	76 kg	525504
Dual Shelf							
GRSDS-24D	4, 10	610 x 616 x 820 mm	220	572 x 533 mm	1260	52 kg	₹534492
GRSDS-30D	4, 12	762 x 616 x 820 mm	220	724 x 533 mm	1419	64 kg	566916
GRSDS-36D	4, 14	914 x 616 x 820 mm	220	876 x 533 mm	1669	73 kg	603708
GRSDS-41D	6, 16	1041 x 616 x 820 mm	220	1003 x 533 mm	1951	82 kg	648900
GRSDS-52D	8, 20	1321 x 616 x 820 mm	220	1283 x 533 mm	2483	98 kg	753228
GRSDS-60D*	10, 24	1524 x 616 x 820 mm	220	1486 x 533 mm	3240	108 kg	799848

* Cord without plug.

All Slant Single and Dual Shelf Display Warmer Models Feature:

Cord Location: 1829 mm. Control side at right base corner.

OPTIONS AND ACCESSORIES – PAGE 114

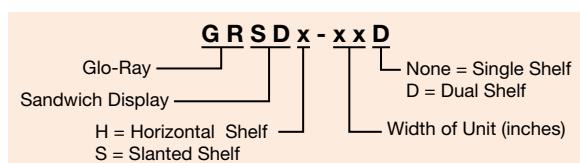



Two GRSDH-36D with dual horizontal shelves

OPTIONS (available at time of purchase only)

ITC-S	Indicating Temperature Control (LED) for single shelf	₹30996
ITC-D	Indicating Temperature Control (LED) for dual shelf	53424
SSEND	Stainless Steel End Panels in lieu of Glass End Panels	per shelf 4284

127 mm Sneeze Guard on Customer side (GRSDS one side GRSDH two sides) –

GRSD24BP	610 mm wide models	per shelf ₹14112
GRSD30BP	762 mm wide models	per shelf 16800
GRSD36BP	914 mm wide models	per shelf 19656
GRSD41BP	1041 mm wide models	per shelf 22512
GRSD52BP	1321 mm wide models	per shelf 25620
GRSD60BP	1524 mm wide models	per shelf 36204
GRSDFLIPLOCK1	Flip-Up Door Locking Plate for GRSDS-xx, -xxD models -24 to -41	per shelf ₹1848
GRSDFLIPLOCK2	Flip-Up Door Locking Plate for GRSDS-xx, -xxD models -52 to -60	per shelf 4200

Display Sign Holder (Signs not included) Color matches unit color – Top or Intermediate shelf –

GRSD-SIGN24	610 mm width. Requires 575 W x 100 H x 2 D mm Sign	each ₹12936
GRSD-SIGN30	762 mm width. Requires 727 W x 100 H x 2 D mm Sign	each 13440
GRSD-SIGN36	914 mm width. Requires 879 W x 100 H x 2 D mm Sign	each 14028
GRSD-SIGN41	1041 mm width. Requires 1006 W x 100 H x 2 D mm Sign	each 14616
GRSD-SIGN52	1321 mm width. Requires 1286 W x 100 H x 2 D mm Sign	each 15792
GRSD-SIGN60	1524 mm width. Requires 1489 W x 100 H x 2 D mm Sign	each 17220

Plexi-Glass Flip-up Doors on one side for GRSDS models

– Not compatible with optional Sneeze Guards or Display Sign Holders in same opening –

SDS24FLIP	610 mm wide models	per shelf ₹25704
SDS30FLIP	762 mm wide models	per shelf 25704
SDS36FLIP	914 mm wide models	per shelf 25704
SDS41FLIP	1041 mm wide models	per shelf 25704

Plexi-Glass Flip-Up Doors on one side for GRSDH models

– Not compatible with optional Sneeze Guards or Display Sign Holders in same opening –

GRSDH24FLIP	610 mm wide models	per shelf ₹25704
GRSDH30FLIP	762 mm wide models	per shelf 25704
GRSDH36FLIP	914 mm wide models	per shelf 25704
GRSDH41FLIP	1041 mm wide models	per shelf 25704

ACCESSORIES (available for purchase at any time)

4"LEGS	102 mm Adjustable Legs (standard on units GRSDH-41 and larger, GRSDS-36 and larger and all duals)	Set of 4 ₹5544
Chef LED Bulbs – 230V adjustable bulb – bulbs must be rotated down –		
CLED-3000-230	Chef LED Bulb (similar to warm Halogen light)	each ₹11676
CLED-4000-230	Chef LED Bulb (similar to cool Fluorescent light)	each 11676
GRSDH-DIV	Additional Stainless Steel Divider Rods – Horizontal model	each ₹2520
GRSDS-DIV	Additional Stainless Steel Divider Rods – Slant model	each 2520


COLORS AND FINISHES – INSIDE BACK COVER

OPTIONS

(available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Glossy Gray Standard –

RED	Warm Red	₹42504
BLACK	Black	42504
GRAY	Gray Granite	42504
WHITE	White Granite	42504
NAVY	Navy Blue	42504
GREEN	Hunter Green	42504
COPPER	Antique Copper	42504



SDS24FLIP
Accessory.
Shown with
brackets for
retrofit



**CLED-3000
and -4000**
Accessory

Glo-Ray® Designer Merchandising Warmers

Boost impulse sales by showcasing your hot foods in the Hatco Glo-Ray® Designer Merchandising Warmers. Designed specifically for displaying wrapped or boxed product, these warmers hold hot food safely at proper serving temperatures.

- Constructed of aluminum and stainless steel with tempered glass side panels
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Available in single- or two-tier models
- Horizontal or slant shelves
- Product divider rods sort food displays
- Thermostatically-controlled hardcoated heated base extends holding times
- Shatter-resistant incandescent lights illuminate the holding areas and emphasize the product

GR2SDH-30
with optional
Designer color
inset panels



GR2SDS-30D
in optional
Designer Black



DESIGNER HORIZONTAL DISPLAY WARMERS

Model®	Bulbs	Divider Rods per Shelf	Dimensions W x D x H (Height includes legs)	Voltage Single Phase	Usable Heated Shelf Space (W x D)	Watts	Approx. Ship Weight	List Price
Single Shelf								
GR2SDH-24	2	5	768 x 686 x 459 mm	220	603 x 559 mm	800	40 kg	₹378588
GR2SDH-30	2	6	921 x 686 x 459 mm	220	759 x 559 mm	1000	55 kg	407316
GR2SDH-36	2	7	1073 x 686 x 459 mm	220	911 x 559 mm	1200	59 kg	436800
GR2SDH-42	4	8	1226 x 686 x 459 mm	220	1064 x 559 mm	1450	63 kg	484092
GR2SDH-48	4	9	1378 x 686 x 459 mm	220	1216 x 559 mm	1650	73 kg	531720
GR2SDH-54	4	10	1530 x 686 x 459 mm	220	1368 x 559 mm	1850	78 kg	580272
GR2SDH-60	6	12	1683 x 686 x 459 mm	220	1521 x 559 mm	2150	85 kg	624624
Dual Shelf								
GR2SDH-24D	4	5	768 x 686 x 737 mm	220	603 x 559 mm	1600	57 kg	₹624288
GR2SDH-30D	4	6	921 x 686 x 737 mm	220	759 x 559 mm	2000	72 kg	660240
GR2SDH-36D	4	7	1073 x 686 x 737 mm	220	911 x 559 mm	2400	93 kg	694176
GR2SDH-42D	8	8	1226 x 686 x 737 mm	220	1064 x 559 mm	2900	102 kg	759864
GR2SDH-48D	8	9	1378 x 686 x 737 mm	220	1216 x 559 mm	3300	115 kg	824628
GR2SDH-54D*	8	10	1530 x 686 x 737 mm	220	1368 x 559 mm	3700	124 kg	891408
GR2SDH-60D*	12	12	1683 x 686 x 737 mm	220	1521 x 559 mm	4300	149 kg	954744

All Designer Horizontal Single and Dual Shelf Display Warmer Models Feature:

Cord Location: Back center of base on control side.

DESIGNER SLANT DISPLAY WARMERS

Model®	Bulbs	Divider Rods per Shelf	Dimensions W x D x H (Height includes legs)	Voltage Single Phase	Usable Heated Shelf Space (W x D)	Watts	Approx. Ship Weight	List Price
Single Shelf								
GR2SDS-24	2	5	768 x 680 x 579 mm	220	603 x 559 mm	800	47 kg	₹408660
GR2SDS-30	2	6	921 x 680 x 579 mm	220	759 x 559 mm	1000	50 kg	431172
GR2SDS-36	2	7	1073 x 680 x 579 mm	220	911 x 559 mm	1200	62 kg	468720
GR2SDS-42	4	8	1226 x 680 x 579 mm	220	1064 x 559 mm	1450	70 kg	515844
GR2SDS-48	4	9	1378 x 680 x 579 mm	220	1216 x 559 mm	1650	74 kg	562212
GR2SDS-54	4	10	1530 x 680 x 579 mm	220	1368 x 559 mm	1850	83 kg	609588
GR2SDS-60	6	12	1683 x 680 x 579 mm	220	1521 x 559 mm	2150	92 kg	652848
Dual Shelf								
GR2SDS-24D	4	5	768 x 680 x 860 mm	220	603 x 559 mm	1600	74 kg	₹635460
GR2SDS-30D	4	6	921 x 680 x 860 mm	220	759 x 559 mm	2000	84 kg	680064
GR2SDS-36D	4	7	1073 x 680 x 860 mm	220	911 x 559 mm	2400	91 kg	722736
GR2SDS-42D	8	8	1226 x 680 x 860 mm	220	1064 x 559 mm	2900	99 kg	789600
GR2SDS-48D	8	9	1378 x 680 x 860 mm	220	1216 x 559 mm	3300	116 kg	854196
GR2SDS-54D*	8	10	1530 x 680 x 860 mm	220	1368 x 559 mm	3700	120 kg	920556
GR2SDS-60D*	12	12	1683 x 680 x 860 mm	220	1521 x 559 mm	4300	135 kg	983892

* When no color is specified, color inset panels and corner caps will be Black.

† Cord without plug.

All Designer Slant Single and Dual Shelf Display Warmer Models Feature:

Cord Location: Back center of base on control side.

OPTIONS AND ACCESSORIES AND MODEL DESIGNATION – PAGE 116



GR2SDS-24D
with optional
Designer color
inset panels

OPTIONS (available at time of purchase only)

127 mm Sneeze Guard (Customer side only on Slant models) –

GR2SD24BP	765 mm wide models	per shelf	₹11424
GR2SD30BP	918 mm wide models	per shelf	14280
GR2SD36BP	1070 mm wide models	per shelf	17136
GR2SD42BP	1222 mm wide models	per shelf	19992
GR2SD48BP	1375 mm wide models	per shelf	22848
GR2SD54BP	1527 mm wide models	per shelf	25704
GR2SD60BP	1680 mm wide models	per shelf	28560

Plexi-Glass Flip-Up Doors (on Control or Customer side) –

2SDS24FLIP	765 mm wide models	per shelf	₹19152
2SDS30FLIP	918 mm wide models	per shelf	21924
2SDS36FLIP	1070 mm wide models	per shelf	24948
2SDS42FLIP	1222 mm wide models	per shelf	28308

Plexi-Glass Split Flip-Up Doors (on Control or Customer side) –

2SDS48FLIP	1375 mm wide models	per shelf	₹33180
2SDS54FLIP	1527 mm wide models	per shelf	38556
2SDS60FLIP	1680 mm wide models	per shelf	44268

2SDHFRITGLS

Front Glass in lieu of Channel Dividers and Divider Rods.
Cannot have Sneeze Guards or Flip-Up Doors
(GR2SDH series, single models only)

₹10416

2SDHFRITGLS-D

Front Glass in lieu of Channel Dividers and Divider Rods.
Cannot have Sneeze Guards or Flip-Up Doors
(GR2SDH series, dual models only)

20916

SS-ITC

Indicating Temperature Control (LED) single shelf (adds 48 mm to Horizontal model depth and 45 mm to Slant model depth)

30996

DS-ITC

Indicating Temperature Control (LED) Dual shelf (adds 48 mm to Horizontal model depth and 45 mm to Slant model depth)

53424

ACCESSORIES (available for purchase at any time)

2SD-DIV	Additional Stainless Steel Divider Rods	each	₹2520
Chef LED Bulbs – 230V adjustable bulb – bulbs must be rotated down –			
CLED-3000-230	Chef LED Bulb (similar to a halogen warm)	each	₹11676
CLED-4000-230	Chef LED Bulb (similar to a fluorescent cool light)	each	11676

COLORS AND FINISHES – INSIDE BACK COVER

GR2SDH - x x D		
Glo-Ray		No Character = Single Shelf D = Dual Shelf
Designer		Heated Surface Width (inches)
Sandwich Display		H = Horizontal Shelf S = Slant Shelf

OPTIONS (available at time of purchase only)

Designer Colors

– Non-standard colors are non-returnable

– Clear Anodized Aluminum standard –

RED	Warm Red	₹42504
BLACK	Black	42504
GRAY	Gray Granite	42504
WHITE	White Granite	42504
NAVY	Navy Blue	42504
GREEN	Hunter Green	42504
COPPER	Antique Copper	42504

Designer Inset Panel Colors – Non-standard

colors are non-returnable – Black standard –

RED	Warm Red	No Charge
GRAY	Gray Granite	No Charge
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge

Designer Corner Caps – Non-standard colors are

non-returnable – Black standard –

DKGRAY	Dark Gray Corner Caps	No Charge
---------------	-----------------------	-----------



SS-ITC Optional



DS-ITC Optional

Heated LED Merchandisers

The new Heated Merchandiser with LED lighting is sleekly designed to safely hold hot packaged food to attract your grab-and-go customers. Available with slant or horizontal shelves, the Heated LED Merchandising Warmers are offered in both single and dual shelf models.

- Choose from slant or horizontal, single or dual shelf models
- Infrared heat safely holds hot packaged product for hours
- High efficiency LED lighting creates better illumination of food product in the holding area
- Features a thermostatically-controlled hardcoated heated base shelf
- Hinged glass side panels are held in place magnetically and swing out for easy cleaning
- An optional Indicating Temperature Control (ITC) enhances accurate control of temperature



HXMS-36D
in standard
Designer Black



HEATED LED MERCHANDISING WARMERS

Model	Divider Rods	Dimensions (W x D x H) Height includes legs	Usable Heated Shelf Space W x D	Voltage	Amps	Watts	Approx. Ship Weight	List Price
Horizontal Single Shelf								
HXMH-24	5	709 x 725 x 555 mm	567 x 552 mm	230	2.9	671	55 kg	₹428148
HXMH-30	6	861 x 725 x 555 mm	720 x 552 mm	230	3.8	863	60 kg	458724
HXMH-36	7	1013 x 725 x 555 mm	872 x 552 mm	230	4.6	1055	66 kg	489132
HXMH-42	8	1166 x 725 x 555 mm	1025 x 552 mm	230	5.2	1201	73 kg	539028
HXMH-48	9	1318 x 725 x 555 mm	1177 x 552 mm	230	6.1	1392	86 kg	589008
HXMH-54	10	1471 x 725 x 555 mm	1329 x 552 mm	230	6.9	1585	91 kg	638904
HXMH-60	12	1623 x 725 x 555 mm	1482 x 552 mm	230	7.7	1777	94 kg	684684
Horizontal Dual Shelf								
HXMH-24D	10	709 x 725 x 835 mm	567 x 552 mm	230	5.8	1342	73 kg	₹ 692244
HXMH-30D	12	861 x 725 x 835 mm	720 x 552 mm	230	7.5	1726	84 kg	739620
HXMH-36D	14	1013 x 725 x 835 mm	872 x 552 mm	230	9.2	2110	93 kg	773220
HXMH-42D	16	1166 x 725 x 835 mm	1025 x 552 mm	230	10.4	2402	100 kg	842856
HXMH-48D	18	1318 x 725 x 835 mm	1177 x 552 mm	230	12.1	2784	111 kg	910560
HXMH-54D*	20	1471 x 725 x 835 mm	1329 x 552 mm	230	13.8	3170	123 kg	979524
HXMH-60D*	24	1623 x 725 x 835 mm	1482 x 552 mm	230	15.5	3554	136 kg	1043196


HEATED LED MERCHANDISING WARMERS

Model	Divider Rods	Dimensions (W x D x H) Height includes legs	Usable Heated Shelf Space W x D	Voltage	Amps	Watts	Approx. Ship Weight	List Price
Slant Single Shelf								
HXMS-24	5	709 x 715 x 551 mm	567 x 552 mm	230	2.9	671	51 kg	₹445368
HXMS-30	6	861 x 715 x 551 mm	720 x 552 mm	230	3.8	863	60 kg	469560
HXMS-36	7	1013 x 715 x 551 mm	872 x 552 mm	230	4.6	1055	68 kg	510048
HXMS-42	8	1166 x 715 x 551 mm	1025 x 552 mm	230	5.2	1201	73 kg	560364
HXMS-48	9	1318 x 715 x 551 mm	1177 x 552 mm	230	6.1	1392	85 kg	610596
HXMS-54	10	1471 x 715 x 551 mm	1329 x 552 mm	230	6.9	1585	93 kg	661668
HXMS-60	12	1623 x 715 x 551 mm	1482 x 552 mm	230	7.7	1777	93 kg	708540
Slant Dual Shelf								
HXMS-24D	10	709 x 715 x 831 mm	567 x 552 mm	230	5.8	1342	73 kg	₹ 692244
HXMS-30D	12	861 x 715 x 831 mm	720 x 552 mm	230	7.5	1726	85 kg	739620
HXMS-36D	14	1013 x 715 x 831 mm	872 x 552 mm	230	9.2	2110	94 kg	783468
HXMS-42D	16	1166 x 715 x 831 mm	1025 x 552 mm	230	10.4	2402	105 kg	855120
HXMS-48D	18	1318 x 715 x 831 mm	1177 x 552 mm	230	12.1	2784	111 kg	925512
HXMS-54D*	20	1471 x 715 x 831 mm	1329 x 552 mm	230	13.8	3170	123 kg	996912
HXMS-60D*	24	1623 x 715 x 831 mm	1482 x 552 mm	230	15.5	3554	132 kg	1064868

* Cord without plug.

All Heated LED Merchandising Warmer Models Feature:
Cord Location: Back center of base, on left side of control box.

OPTIONS AND ACCESSORIES – PAGE 118

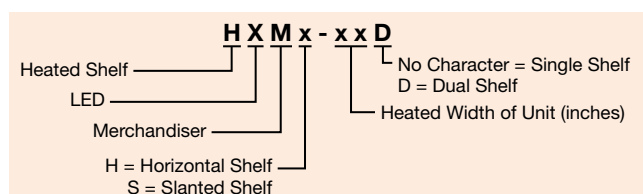



HXMS-48D in standard *Designer Black* with optional LED accent lighting in support posts

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Black standard –

RED	Warm Red	₹42504
GRAY	Gray Granite	42504
WHITE	White Granite	42504
NAVY	Navy Blue	42504
GREEN	Hunter Green	42504
COPPER	Antique Copper	42504

HZM-LP	Red LED Accent Lighting in support post	₹64680
SS-ITC	Indicating Temperature Control (LED) for single shelf	30996
DS-ITC	Indicating Temperature Control (LED) for dual shelf	53424

127 mm Sneeze Guards – Not compatible with Flip-Up Doors in same opening –

HZM24BP	On Customer side on -24 models	per shelf ₹23772
HZM30BP	On Customer side on -30 models	per shelf 25872
HZM36BP	On Customer side on -36 models	per shelf 27972
HZM42BP	On Customer side on -42 models	per shelf 30828
HZM48BP	On Customer side on -48 models	per shelf 33600
HZM54BP	On Customer side on -54 models	per shelf 36624
HZM60BP	On Customer side on -60 models	per shelf 39564

Plexi-Glass Flip-Up Doors – Not compatible with Sneeze Guards in same opening, one side only –

HZM24FLIP	On Control or Customer side on -24 models	per shelf ₹23856
HZM30FLIP	On Control or Customer side on -30 models	per shelf 25872
HZM36FLIP	On Control or Customer side on -36 models	per shelf 28224
HZM42FLIP	On Control or Customer side on -42 models	per shelf 30744
HZM48FLIP	On Control or Customer side on -48 models	per shelf 33432
HZM54FLIP	On Control or Customer side on -54 models	per shelf 36624
HZM60FLIP	On Control or Customer side on -60 models	per shelf 39900

ACCESSORIES (available for purchase at any time)

HZM-DIV	Additional Stainless Steel Divider Rods	each ₹2688
---------	---	------------

COLORS AND FINISHES – INSIDE BACK COVER

Glo-Ray® Heated Glass Merchandisers

Hatco's Glo-Ray® Heated Glass Merchandisers are perfect for holding hot wrapped or boxed foods on a buffet line or customer serving areas, and features a curved top design that compliments any décor.

- Blanket-style heating elements in the hardcoated base that are thermostatically-controlled
- Unique, patented heated glass shelves with infinite controls conduct heat to food product above and below
- LED lighting allows for optimal food product display with energy savings
- Attractive curved top design includes a built-in top sign holder for your own custom signage, 26.75" W (679 mm) x 3" H (76 mm), at the top front of the unit
- Also comes with: tempered glass side panels, 2.5" (64 mm) legs, thermostatically-controlled heated base and upper canopy, divider rods and comes standard in *Designer Black*



GR3SDS-39DCT in standard *Designer Black* and top sign holder



GR3SDS-39TCT in Optional Glossy Gray and top sign holder

Heated Merchandisers

HEATED GLASS MERCHANDISERS

Model	Dimensions W x D x H	Usable Heated Shelf Space (W x D)	Voltage Single Phase	Watts	Amps	Approx. Ship Weight	List Price
Dual Shelf GR3SDS-39DCT	995 x 698 x 673 mm	879 x 524 mm	220	1750	8.0	84 kg	₹851844
Triple Shelf GR3SDS-39TCT*	995 x 698 x 882 mm	879 x 524 mm	220	2720	12.4	104 kg	₹1118544

* Cord without plug.

All Heated Glass Merchandiser Models Feature:

Divider Rods Included : GR3SDS-39DCT : 14 rods (7 per shelf).

GR3SDS-39TCT : 21 rods (7 per shelf).

Cord Location : Right rear on server side.

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Black standard –

RED	Warm Red	₹42504
GRAY	Gray Granite	42504
WHITE	White Granite	42504
NAVY	Navy Blue	42504
GREEN	Hunter Green	42504
COPPER	Antique Copper	42504


Gloss Finish – Non-standard colors are non-returnable – Black standard –

GGRAY	Glossy Gray	₹42504
--------------	-------------	---------------

ACCESSORIES (available for purchase at any time)

4"LEGS	102 mm Adjustable Legs	Set of 4 ₹5544
3SD-DIV	Additional Stainless Steel Divider Rods	each 2520

COLORS AND FINISHES – INSIDE BACK COVER

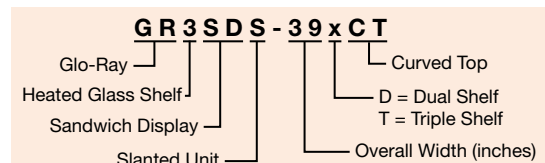

GLOMAX® Heated Display Cases

Hatco's GLOMAX® Heated Display Cases are designed to hold prepared foods for prolonged periods of time while maintaining that "just made" quality.

The Hatco Heated Display Case maintains peak serving temperatures, combined with humidity, giving you a display case that holds wrapped or unwrapped foods longer than conventional holding equipment.

GMHD-2PT

- Adjustable shelves can move up and down the back support posts and can be horizontal or slanted
- Energy efficient LED lighting to illuminate your food display
- Water pan to provide humidity for extended holding of products up to several hours
- Thermostatic mechanical heat control
- Holds up to six food pans with trivets
- Standard sign holder (480 x 100 mm) promotes your product offerings on the bottom front of unit (sign not included)

GMHDDH-3PT

- Non-adjustable slanted shelves to show off food products
- Energy efficient LED lighting to illuminate your food display
- Electronically controlled humidity system with a 3.4 liter capacity water reservoir
- Thermostatic electronic heat control
- Holds up to nine food pans with trivets



GMHD-2PT


GMHDDH-3PT
in optional
Designer Black

HEATED DISPLAY CASES

Model	Dimensions W x D x H	Voltage	Hz	Watts	Amps	Approx. Ship Weight	List Price
GMHD-2PT	480 x 400 x 676 mm	230	50-60	670	2.9	36 kg	₹112392
GMHDDH-3PT	670 x 464 x 757 mm	230	50-60	1400	6.1	57 kg	224868

All Heated Display Case Models Feature:

Models Shipped with:

GMHD-2PT: Rear glass sliding doors, adjustable shelves, LED lights, front sign holder (sign not included), six food pans with trivets, water pan for humidity, 25 mm adjustable legs and a 1829 mm cord with plug.

GMHDDH-3PT: Rear glass sliding doors, LED lights, nine food pans with trivets, built-in water tank for humidity, 25 mm adjustable legs and a 1829 mm cord with plug.

Water Tank Capacity for Humidity System: 3.4 liters.

Cord Location: Back right of unit.

WATER QUALITY REQUIREMENTS – PAGE 157

OPTIONS (available at time of purchase only)

Designer Color – Non-standard colors are non-returnable – Stainless Steel standard – BLACK

Designer Black


₹7644

ACCESSORIES (available for purchase at any time)

TRIVET 265X205	265 X 205 mm, raises food product off bottom of food pan	1512
PAN 265x205	265 X 205 mm, stainless steel food pan	1344
GMHDT HUMPAN	Water pan, stainless steel (GMHD-2PT only)	1260

FOOD PANS AND TRIVETS – PAGE 155

COLORS AND FINISHES – INSIDE BACK COVER

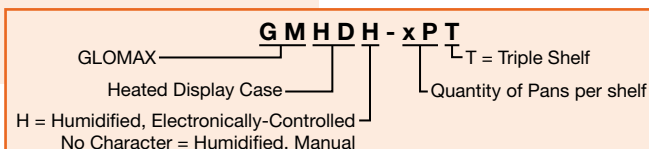

Glo-Ray® Curved Warmers

Looking to add a touch of class to a new point-of-sale area or to change or upgrade an existing area? Hatco's Glo-Ray® Curved Warmer offers a unique and attractive solution for impulse sales areas.

- Single shelf and dual shelf units come standard with mirrored glass back panel
- Individual thermostatically-controlled heated base with master rocker switch maintains safe-serving temperatures
- Incandescent lighting allows for optimal food product display
- Humidified dual shelf unit contains a 1.2 liter capacity water reservoir
- Models with simulated stone are Swanstone®



GRCMW-1 in *Designer Black* with food pans (not available)



GRCMW-1DH in *Designer Black* with food pans (not available)

CURVED WARMERS

Model	Dimensions W x D x H	Voltage Single Phase	Usable Heated Shelf Space (W x D)		Watts	Approx. Ship Weight	List Price
			Top Shelf	Bottom Shelf			
Single Shelf GRCMW-1	562 x 546 x 505 mm	220	—	501 x 330 mm	619	25 kg	₹323820
Dual Shelf GRCMW-1D	660 x 511 x 683 mm	220	577 x 314 mm	577 x 396 mm	1294	42 kg	₹616812
Dual Shelf with Humidity ♦ GRCMW-1DH	660 x 511 x 683 mm	220	577 x 314 mm	577 x 396 mm	1395	45 kg	₹659568

♦ Humidity on bottom shelf only.

All Curved Warmer Models Feature:

Water Reservoir Capacity (GRCMW-1DH model only): 1.2 liters.

Cord Location: Control side at right base corner.

WATER QUALITY REQUIREMENTS – PAGE 157

OPTIONS (available at time of purchase only)

Designer Colors (unit's painted surface) – Non-standard colors are non-returnable – Black standard –

RED	Warm Red	No Charge
GRAY	Gray Granite	No Charge
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge

Simulated Stone Color (Unit's painted surface and decorative trim inserts)


– Non-standard colors are non-returnable –

SS-ASHGRAY	Ash Gray	₹56280
SS-BIRCH	Birch	56280
SS-ICE	Ice	56280

CMWDBACKFLIP	Top and bottom shelf Flip-Up Doors on Server's side in lieu of Mirrored Back Panel (GRCMW-1D, -1DH models only)	₹ 3780
CMWDTOPFLIP	Top shelf Flip-Up Door on Customer side in lieu of Sneeze Guard (GRCMW-1D, -1DH models only)	19068

FOOD PANS AND TRIVETS – PAGE 155

COLORS AND FINISHES – INSIDE BACK COVER

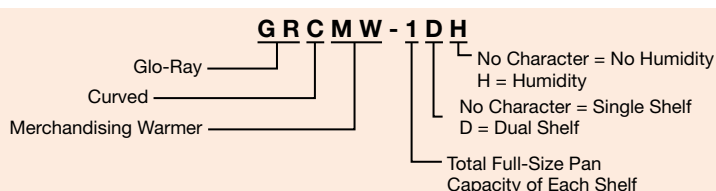

Glo-Ray® Designer Heated Display Cases

Our *Designer* series Glo-Ray® Heated Display Case with curved glass and incandescent lighting will display your offering with flare and elegance. We combine our thermostatically-controlled heated base and infrared overhead heating to blanket your offering at the perfect temperature.

- High visibility merchandiser with curved tempered glass
- Exclusive cool base construction
- Single or Dual models
- Rollerless sliding doors
- Available with or without controlled humidity (bottom shelf only)
- Constructed of aluminum and stainless steel with tempered glass

- Curved glass front tilts forward for easy cleaning
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Shatter-resistant incandescent lights illuminate the food product

Humidified reservoir is located in between pans



GRCDD-2PD with optional pan skirt and *Designer* Hunter Green, flip-up doors, and accessory food pans



GRCDH-1PD with pan skirt and new optional flip-up doors and accessory food pan (top baking dish not available)



GRCDH-3PD shown in standard Stainless Steel, with accessory food pans

DESIGNER DISPLAY CASES

Model	Bulbs	Dimensions W x D x H (Height includes legs)	Usable heated Shelf Space (W x D)	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
Single Shelf							
GRCD-1P	2	524 x 660 x 610 mm	460 x 533 mm	220	405	43 kg	₹473172
GRCD-2P	3	826 x 660 x 610 mm	762 x 533 mm	220	710	55 kg	540204
GRCD-3P	3	1156 x 660 x 610 mm	1092 x 533 mm	220	915	69 kg	607572
Dual Shelf							
GRCD-1PD	4	524 x 660 x 806 mm	460 x 533 mm	220	907	45 kg	₹552468
GRCD-2PD	6	826 x 660 x 806 mm	762 x 533 mm	220	1080	77 kg	629160
GRCD-3PD	6	1156 x 660 x 806 mm	1092 x 533 mm	220	1437	95 kg	724920
Single Shelf with Humidity							
GRCDH-1P	2	524 x 660 x 610 mm	460 x 533 mm	220	634	41 kg	₹540288
GRCDH-2P	3	826 x 660 x 610 mm	762 x 533 mm	220	939	56 kg	607656
GRCDH-3P	3	1156 x 660 x 610 mm	1092 x 533 mm	220	1145	71 kg	674940
Dual Shelf with Humidity*							
GRCDH-1PD	4	524 x 660 x 806 mm	460 x 533 mm	220	1136	55 kg	₹619668
GRCDH-2PD	6	826 x 660 x 806 mm	762 x 533 mm	220	1309	79 kg	696612
GRCDH-3PD	6	1156 x 660 x 806 mm	1092 x 533 mm	220	1666	100 kg	792288

* Humidity on bottom shelf only. Includes pan skirt on bottom shelf. Pan skirts accommodate 64 H mm pans.

All Designer Display Case Models Feature:


Cord Location: Control side at right base corner.

All Models With Humidity Feature:

Water Chamber Capacity: 3 liters.

OPTIONS AND ACCESSORIES – PAGE 123

WATER QUALITY REQUIREMENTS – PAGE 157

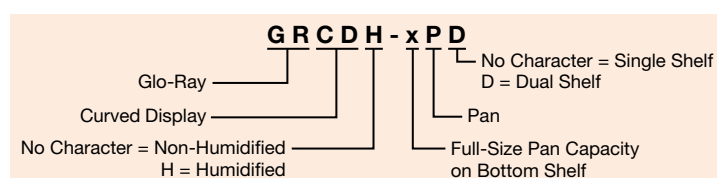



GRCD-2PD with optional flip-up doors and Designer Warm Red

OPTIONS (available at time of purchase only)**Self-Closing Flip-Up Doors on both shelves on Customer side in lieu of Glass Front**
(adds 13 mm depth to unit) –

CD1PDFLIP	1-Pan models	₹ 74592
CD2PDFLIP	2-Pan models	79884
CD3PDFLIP	3-Pan models	140952

Pan Skirt on Bottom Shelf (Accommodates 64 D mm pans – standard on Humidified models) –

SKIRT-1P	1-Pan model in lieu of Pan Rail	₹ 5124
SKIRT-2P	2-Pan model in lieu of Pan Rail	9240
SKIRT-3P	3-Pan model in lieu of Pan Rail	13188
UPPERSKIRT-2P	Pan Skirt for upper shelf of 2-Pan models in lieu of Pan Stop	₹ 9408
UPPERSKIRT-3P	Pan Skirt for upper shelf of 3-Pan models in lieu of Pan Stop	18900

Mirrored Glass Sliding Doors in lieu of Glass Doors (Server side only) –**Single Shelf Models –**

MIRROR	-1P	₹ 8064
MIRROR	-2P	11256
MIRROR	-3P	14448

Dual Shelf Models –

MIRROR	-1PD	₹16128
MIRROR	-2PD	22512
MIRROR	-3PD	32508

OPTIONS

(available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Stainless Steel standard –

RED	Warm Red	₹42504
BLACK	Black	42504
GRAY	Gray Granite	42504
WHITE	White Granite	42504
NAVY	Navy Blue	42504
GREEN	Hunter Green	42504
COPPER	Antique Copper	42504

HEATED DISPLAY CASE MAXIMUM PAN CAPACITIES*

Model	Pan Capacity	Optional Pan Skirt Frames
GRCD-1P	1 Full-Size Pan	One SKIRT-1P
GRCD-2P	2 Full-Size Pans	One SKIRT-2P
GRCD-3P	3 Full-Size Pans	One SKIRT-3P
GRCD-1PD – Top Shelf	1 Half-Size Pan or one 356 mm Pizza Pan	None
GRCD-1PD – Bottom Shelf	1 Full-Size Pan	One SKIRT-1P
GRCD-2PD – Top Shelf	1 Full-Size Pan and 1 Third-Size Pan or two 356 mm Pizza Pans	One UPPERSKIRT-2P
GRCD-2PD – Bottom Shelf	2 Full-Size Pans	One SKIRT-2P
GRCD-3PD – Top Shelf	2 Full-Size Pans or three 356 mm Pizza Pans	One UPPERSKIRT-3P
GRCD-3PD – Bottom Shelf	3 Full-Size Pans	One SKIRT-3P

* All pan capacities shown are for non-humidified models. 64 mm deep pans recommended for bottom shelf of humidified models.

FOOD PANS AND TRIVETS – PAGE 155**COLORS AND FINISHES – INSIDE BACK COVER**

Glo-Ray® Heated Display Cases

Designed for “show and sell” area in any foodservice operation, the Hatco Glo-Ray® Heated Display is perfect for hot food merchandising. Top and bottom heat combine to keep all food at that “just-made” taste and temperature longer.

- Thermostatically-controlled heated base 38° - 93°C to extend holding times
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Constructed of aluminum and stainless steel with tempered glass
- Shatter-resistant incandescent lights illuminate the food product
- Exclusive cool base construction minimizes heat transfer, keeping exterior base cool
- Rollerless sliding doors



GRHD-4PD with optional *Designer Antique Copper*, mirrored glass doors and accessory food pans



GRHDH-2P with standard pan skirt and optional double side opening, and accessory food pans

DISPLAY CASES

Model	Bulbs	Dimensions (W x D x H) Height includes legs	Usable Heated Shelf Space (W x D)	Voltage Single Phase	Watt	Approx. Ship Weight	List Price
Single Shelf							
GRHD-2P	4	826 x 660 x 635 mm	712 x 553 mm	220	1035	54 kg	₹414288
GRHD-3P	5	1156 x 660 x 635 mm	1042 x 553 mm	220	1465	65 kg	473508
GRHD-4P	6	1486 x 660 x 635 mm	1372 x 553 mm	220	1930	98 kg	558852
Dual Shelf							
GRHD-2PD	6	826 x 660 x 762 mm	712 x 553 mm	220	1223	68 kg	₹570024
GRHD-3PD	8	1156 x 660 x 762 mm	1042 x 553 mm	220	1603	86 kg	639912
GRHD-4PD	8	1486 x 660 x 762 mm	1372 x 553 mm	220	2288	104 kg	735000
Single Shelf with Humidity							
GRHDH-2P	4	826 x 660 x 635 mm	712 x 553 mm	220	1179	57 kg	₹484344
GRHDH-3P	5	1156 x 660 x 635 mm	1042 x 553 mm	220	1584	74 kg	543564
GRHDH-4P	6	1486 x 660 x 635 mm	1372 x 553 mm	220	2253	98 kg	678552
Dual Shelf with Humidity♦							
GRHDH-2PD	6	826 x 660 x 762 mm	712 x 553 mm	220	1532	80 kg	₹639492
GRHDH-3PD	8	1156 x 660 x 762 mm	1042 x 553 mm	220	1962	85 kg	709296
GRHDH-4PD	8	1486 x 660 x 762 mm	1372 x 553 mm	220	2941	109 kg	854280

Model number indicates the number of full-size food pans the unit will hold, with same number of half-size pans for units with a top shelf (i.e., 2P = two pans).

♦ Humidity on bottom shelf only. Includes pan skirt on bottom shelf. Pan skirts accommodate 64 mm pans.

All Display Case Models Feature:


Water Reservoir Capacity : 2-Pan and 3-Pan : 3 liters.

4-Pan: 6 liters.

Cord Location: 1829 mm, control side at right base corner.

OPTIONS AND ACCESSORIES – PAGE 125

WATER QUALITY REQUIREMENTS – PAGE 157

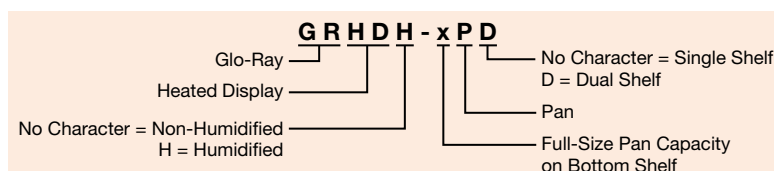



GRHD-4PD with optional pan skirts
Top shelf: one UPPERSKIRT-4P
Bottom shelf: one SKIRT-4P

OPTIONS (available at time of purchase only)

SKIRT-2P	2-Pan model Pan Skirt for 64 D mm Pans on bottom shelf (standard on Humidified models) in lieu of Pan Rail	₹ 9744
SKIRT-3P	3-Pan model Pan Skirt for 64 D mm Pans on Bottom Shelf (standard on Humidified models) in lieu of Pan Rail (consists of one SKIRT-1P and one SKIRT-2P)	13608
SKIRT-4P	4-Pan model Pan Skirt for 64 D mm Pans on bottom shelf (standard on Humidified models) in lieu of Pan Rail (consists of two SKIRT-2P)	19404
UPPERSKIRT-2P	Pan Skirt for upper shelf of 2-Pan models in lieu of Pan Stop	9744
UPPERSKIRT-3P	Pan Skirt for upper shelf of 3-Pan models in lieu of Pan Stop	19404
UPPERSKIRT-4P	Pan Skirt for upper shelf of 4-Pan models in lieu of Pan Stop	19404
FLIP	Flip-up Doors on Control side in lieu of Glass Sliding Doors	No Charge
Sliding Door in lieu of Fixed Glass Customer Panel –		
SLIDE-2P	Per opening	₹20160
SLIDE-3P	Per opening	22176
SLIDE-4P	Per opening	27636
Flip-Up Door in lieu of Fixed Glass Customer Panel –		
FLIP-2P	Per opening	₹20160
FLIP-3P	Per opening	22176
FLIP-4P	Per opening	27636
Mirror Glass Sliding Door in lieu of Glass Sliding Door (server side only) –		
MIRROR-2P	Per opening	₹11592
MIRROR-3P	Per opening	14784
MIRROR-4P	Per opening	18312

OPTIONS

(available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable

– Stainless Steel standard –

RED	Warm Red	₹42504
BLACK	Black	42504
GRAY	Gray Granite	42504
WHITE	White Granite	42504
NAVY	Navy Blue	42504
GREEN	Hunter Green	42504
COPPER	Antique Copper	42504

FOOD PANS AND TRIVETS – PAGE 155

COLORS AND FINISHES – INSIDE BACK COVER

HEATED DISPLAY CASE MAXIMUM PAN CAPACITIES*

Model	Pan Capacity	Optional Pan Skirt Frames
GRHD-2P	2 Full-Size Pans	One SKIRT-2P
GRHD-3P	3 Full-Size Pans	One SKIRT-3P
GRHD-4P	4 Full-Size Pans	One SKIRT-4P
GRHD-2PD – Top Shelf	2 Half-Size Pans or two 356 mm Pizza Pans	One UPPERSKIRT-2P
GRHD-2PD – Bottom Shelf	2 Full-Size Pans	One SKIRT-2P
GRHD-3PD – Top Shelf	3 Half-Size Pans or three 356 mm Pizza Pans	One UPPERSKIRT-3P
GRHD-3PD – Bottom Shelf	3 Full-Size Pans	One SKIRT-3P
GRHD-4PD – Top Shelf	2 Full-Size Pans or 4 Half-Size Pans or four 356 mm Pizza Pans	One UPPERSKIRT-4P
GRHD-4PD – Bottom Shelf	4 Full-Size Pans	One SKIRT-4P

* All pan capacities shown are for non-humidified models. 64 mm deep pans recommended for bottom shelf of humidified models.

Holding & Display Cabinets



Glo-Ray 2-Go® Heated Shelves

The Hatco Glo-Ray 2-Go® Heated Shelves are designed specifically with your delivery and carry-out needs in mind. Capable of holding a great quantity of hot food items at optimum serving temperatures, the GRS2GC models hold bags and boxes up to 30 minutes with a high temperature range of up to 93° C.

- Shelves are 507 mm deep and 986 mm wide, with a 288 mm clearance between shelves that is large enough to fit a variety of carry-out/delivery bags and boxes.
- Each shelf features a digital temperature control, a power On/Off switch, and a jumper power cord
- Units feature stainless steel shelves with heated bases that are thermostatically-controlled



GRS2GC-3920-2



GRS2GC-3920-4



Power On/Off switch, and a jumper power cord for each shelf



Digital temperature control for each shelf

Holding & Display
Cabinets

HEATED SHELVES

Model	Description	Dimensions W x D x H	Voltage	Watts	Amps	Approx. Ship Weight	List Price
GRS2GC-3920-2	2 heated shelves	986 x 507 x 475 mm	220-240	694-824	3.2-3.4	21 kg	₹109116
GRS2GC-3920-4	4 heated shelves	986 x 507 x 1390 mm	220-240	1393-1648	6.3-6.9	40 kg	201516

All Heated Shelf Models Feature:
Models shipped with: Plastic feet and a 1829 mm power cord and plug. Anti-tip wall bracket included on GRS2GC-3920-4 models only.
Cord Location: Server side, bottom right corner.

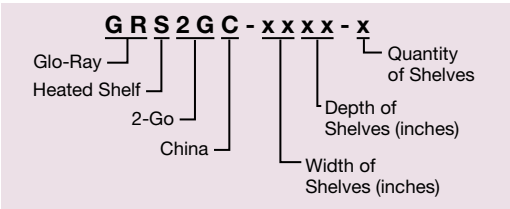


Plate Warmers

Hatco's Plate Warmers are designed to hold preheated serving plates where your customers can access them easily. Countertop or Built-In models available. Easy to load and easy to clean. Serving hot food on preheated plates will help extend the holding times of most foods, and adds to a better customer experience.

- Can hold 25 plates up to 305 mm in diameter
- A covered, digital temperature control with an adjustable range of 40° - 50°C
- Energy efficient LED lighting illuminates the interior from the top
- Optional *Designer Black Powdercoating*
- Cabinet cutout dimensions are: 423 x 512 mm
- Ability to connect or "daisy-chain" up to three units on one power cord



PWB-12
in standard
Stainless Steel



PWC-12
in optional
Designer Black



Digital display and power switch

PLATE WARMERS

Model	Dimensions (W x D x H)	Opening Dimensions (W x H)	Voltage	Watts	Amps	Approx. Ship Weight	List Price
Countertop							
PWC-12	427 x 441 x 566 mm	320 x 400 mm	220-240	389-463	1.7-1.8-1.9	29 kg	₹114492
Built-In							
PWB-12	444 x 442 x 534 mm	322 x 400 mm	220-240	389-463	1.7-1.8-1.9	22 kg	₹106008

All Plate Warmer Models Feature:

Models Shipped with:

PWC-12: Power On/Off switch, a detachable 1829 mm power cord, a 1000 mm jumper cord and a wall-mounting kit.

PWB-12: Power On/Off switch, a detachable 1829 mm power cord and a 1000 mm jumper cord.

Cabinet cut-out dimensions for **PWB-12:** 423W x 512H mm.

Cord Location: back of unit, top left corner.


OPTIONS (available at time of purchase only)

Color – Non-standard colors are non-returnable – Stainless Steel Standard –

BLACK

Designer Black

₹11592



Flav-R-Fresh® Impulse Display Cabinets

A profitable way to create impulse food sales is with the small Flav-R-Fresh® Holding and Display Cabinet. Using separate heat and humidity controls to keep crisp foods crisp and moist foods moist allows you to showcase your products longer using minimum counter space.

- Full-view display with tempered glass sides and door
- LED light enhances food appeal while safeguarding food products from bulb breakage
- Internal thermometer indicates cabinet temperature
- Models come with single- or double-door openings which provide fast access to food racks
- Food decals and merchandising signs are available to help promote product visibility and appeal



FDWDE-1 with rotating 4-tier circle rack and accessory pans

IMPULSE DISPLAY CABINETS

Model*	Description*	Dimensions W x D x H <i>Height includes standard 25 mm legs</i>	Voltage Single Phase	Approx. Ship Weight	List Price*
FDWDE-1	1 Door w/4-tier Circle Rack w/Motor	492 x 530 x 732 mm	220	38 kg	₹271068
FDWDE-1X	1 Door w/4-tier Multi-Purpose Rack	492 x 530 x 732 mm	220	38 kg	259140
FDWDE-2	2 Doors w/4-tier Circle Rack w/Motor	492 x 559 x 732 mm	220	40 kg	286188
FDWDE-2X	2 Doors w/4-tier Multi-Purpose Rack	492 x 559 x 732 mm	220	40 kg	271992

♦ Models FDWDE-1 and FDWDE-2 include rack motor. Models with "X" designator do not have revolving display and are NOT available for retrofit.

† Rack listed is included with unit. Other racks available – deduct price of included rack and add price of substituted rack to list price.

* For non-humidified cabinet, deduct **₹17640**. Unit will only operate in dry mode.

All Impulse Display Cabinet Models Feature:

Cabinet Opening Dimensions: 400 W x 502 H mm.

Door Hinges: Control Side: Left-hand side.


Customer Side (Two-door models only): Right-hand side.

Max. Pizza Pan Size: 381 mm diameter with 4-Tier Circle Rack.

Water Tank Capacity for Humidity System: 2 liters.

Cord Location: Facing controls, left-hand side panel, lower right corner.

WATER QUALITY REQUIREMENTS – PAGE 157



OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Clear Anodized Aluminum Standard –

RED	Warm Red	₹33684
BLACK	Black	33684
GRAY	Gray Granite	33684
WHITE	White Granite	33684
NAVY	Navy Blue	33684
GREEN	Hunter Green	33684
COPPER	Antique Copper	33684
FDWD-6FRT	152 mm Merchandising Display Sign Holder for Control side only (includes Metal Holder only). Available in all Designer Colors to match your unit (Black is standard). Adds 29 mm to height of unit. Requires (1) Sign 491 W x 157 H x 2 D mm – not included	₹10164
FDWD-6SIGN	162 mm, One Sided Merchandising Display Sign Holder (Includes metal holder and window) – one per side , three maximum. Available in all Designer colors to match your unit (Black is Standard). Adds 32 mm to height of unit. Requires (1) sign 491 W x 159 H x 1.59 D mm – not included	7896
FDWD-DIS	76 mm One-Sided Merchandising Display Sign Holder (includes Metal Holder and Window) – one per side , three maximum. Available in all Designer colors to match your unit (Black is standard) Adds 32 mm to height of unit. Requires (1) one Sign 484 W x 83 H x 2 D mm – not included	7224

ACCESSORIES (available for purchase at any time)

FDWD-LEGS	102 mm Adjustable Legs (102-127 mm)	₹ 7476
COUPLING	Motorless Rack Coupling for FDWDE-1X and -2X models (select Circle Rack or Pretzel Tree)	4116
FDWD4TCRR	4-Tier Circle Rack with Pizza Pan Retainers (Requires Coupling for -1X or -2X models)	22344
FDWSMP	4-Shelf Multi-Purpose Rack (each shelf 346 W x 321 D mm)	25284
FDW3TPT	3-Tier Pretzel Tree (requires Coupling for -1X or -2X models)	25284

RACKS – PAGE 133

FOOD PANS AND TRIVETS – PAGE 155

COLORS AND FINISHES – INSIDE BACK COVER



**COUPLING
Accessory**

Flav-R-Savor® Holding & Display Cabinets

Balancing a precise combination of heat and humidity, the Hatco Flav-R-Savor® Cabinets provide an attractive showcase for hot food displays and generate impulse sales. A complete range of cabinet sizes, door options and rack types allows for perfect merchandising of food products such as pizza, fried foods, bakery items, sandwiches and more.

- Full-view display with tempered glass sides and door provide maximum heat retention
- Controlled heat and humidity for longer holding times
- 3-liter stainless steel water reservoir provides all day moisture
- Low-water protection prevents heating element burnout and alerts operator to low-water condition

- Revolving or stationary display racks
- Available in two heights with single- or double-sided opening models
- LED lights with clear plastic cover help showcase food product



FSD-2X with 3-tier pan rack and accessory food pans

FSDT-2 with 4-tier circle rack and 102 mm legs, optional *Designer* Black color and accessory food pans



DISPLAY CABINETS

Model*	Description*	Dimensions W x D x H	Cabinet Opening W x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price* 220, 240V
Standard							
FSD-1	1 Door w/3-Tier Circle Rack	569 x 612 x 699 mm	483 x 473 mm	220	1414	59 kg	₹440580
FSD-1X	1 Door w/3-Tier Pan Rack	569 x 612 x 699 mm	483 x 473 mm	220	1414	57 kg	417732
FSD-2	2 Doors w/3-Tier Circle Rack	569 x 642 x 699 mm	483 x 473 mm	220	1414	57 kg	471240
FSD-2X	2 Doors w/3-Tier Pan Rack	569 x 642 x 699 mm	483 x 473 mm	220	1414	57 kg	448728
Tall							
FSDT-1	1 Door w/4-Tier Circle Rack	569 x 612 x 826 mm	483 x 603 mm	220	1414	58 kg	₹446796
FSDT-1X	1 Door w/4-Tier Pan Rack	569 x 612 x 826 mm	483 x 603 mm	220	1414	57 kg	424368
FSDT-2	2 Doors w/4-Tier Circle Rack	569 x 642 x 826 mm	483 x 603 mm	220	1414	57 kg	483252
FSDT-2X	2 Doors w/4-Tier Pan Rack	569 x 642 x 826 mm	483 x 603 mm	220	1414	57 kg	461160

♦ Models FSD-1, FSD-2, FSDT-1 and FSDT-2 include rack motor. Models with "X" designator do not have revolving display and are NOT available for retrofit.

‡ Rack listed is included with unit. Other racks available – deduct price of included rack and add price of substituted rack to list price.

* For non-humidified cabinet, deduct **₹17640**. Unit will only operate in dry mode.

All Display Cabinet Models Feature:

Door Hinges: **Control Side:** Left-hand side.

Customer Side (Two-Door models only): Right-hand side.


Max. Pan Size: 483 mm diameter with 4-Tier Circle Rack.

Water Tank Capacity for Humidity System: 3 liters.

Cord Location: 1829 mm. Facing controls, left-hand side panel, lower right corner.

OPTIONS AND ACCESSORIES – PAGE 131

WATER QUALITY REQUIREMENTS – PAGE 157

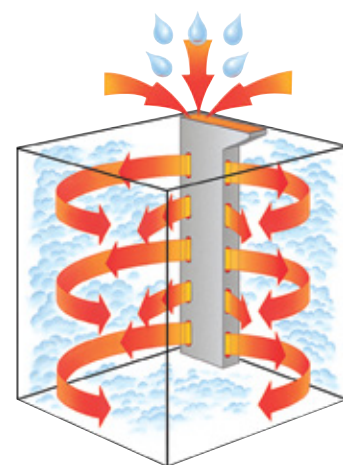

CONTROLLED MOISTURIZED HEAT KEEPS HOT FOODS FRESH LONGER

Hatco's Flav-R-Savor® air flow pattern is designed to maintain consistent cabinet temperature without drying out foods. The precise combination of heat and humidity creates a "blanket" effect around the food. The air flow rate enables the cabinet to recover temperature rapidly after opening and closing the door.

FSDT - x X

Flav-R-Savor Display Cabinet
No Character = Standard
T = Tall
No Rack Motor
1 = One Door
2 = Two Door



Two FSDT-1 with 4-tier circle racks, optional sign holders (signs not included) and accessory pans

OPTIONS (available at time of purchase only)

LED-NW18	Neutral White (cool) LED lighting (in lieu of standard Neutral White)	No Charge
THERM	Mechanical Controls	No Charge
FSD7SIGN	191 mm Merchandising Display Sign Holder (includes Metal Holder and Window) – one per side, three maximum. Available in all <i>Designer Colors</i> to match your unit (Black is standard). Adds 32 mm to height of unit. Requires (1) Sign 572 W x 191 H x 2 D – Sign not included	₹8232

ACCESSORIES (available for purchase at any time)

F-LEGS-4	102 mm Adjustable Legs	₹7476
COUPLING	Motorless Rack Coupling for FSD-1X, FSD-2X, FSDT-1X and FSDT-2X models (select appropriate Circle Rack)	4116
RACK – FSD ONLY –		
FSD5SMP	5-Shelf Multi-Purpose Rack (each shelf W 457 x 406 D mm)	₹34020
FSD3TCR	3-Tier Circle Rack with Pizza Pan Retainers (requires Coupling for -1X or -2X models)	20832
FSD3TPR	3-Tier Pan Rack accommodates Half-Size Sheet Pans - not included)	30072
RACKS – FSDT ONLY –		
FSDT7SMP	7-Shelf Multi-Purpose Rack (each shelf 457 W x 406 D mm)	₹41664
FSDT4TCR	4-Tier Circle Rack with Pizza Pan Retainers (requires Coupling for -1X or -2X models)	22176
FSDT5TCR	5-Tier Circle Rack with Pizza Pan Retainers (requires Coupling for -1X or -2X models)	33684
FSDT4TPR	4-Tier Pan Rack (Accommodates Half-Size Sheet Pans - not included)	26628
FSDT3SAR	3-Shelf Angle Rack (15° angle shelves), Each shelf 457 W x 413 D mm	76860
FSDT3TPT	3-Tier Pretzel Tree (requires Coupling for -1X or -2X models)	36288

DECORATIVE KIT – PAGE 132

RACKS – PAGE 133

FOOD PANS AND TRIVETS – PAGE 155

COLORS AND FINISHES – INSIDE BACK COVER

OPTIONS

(available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Clear Anodized Aluminum Standard –


RED	Warm Red	₹42504
BLACK	Black	42504
GRAY	Gray Granite	42504
WHITE	White Granite	42504
NAVY	Navy Blue	42504
GREEN	Hunter Green	42504
COPPER	Antique Copper	42504

Decorative Kit for FSD and FSDT Models only

Your Hatco Flav-R-Savor® Holding & Display Cabinet can transform from a "heated box" into a *Designer Merchandiser* with a variety of simple accessory additions. Create a new look and feel to your décor.



- The curved hinged header allows easy access to controls and water fill cup, and gives a great area to brand your food product with a magnetic sign (sign not included)
- All decorative pieces come standard in *Designer Black* powdercoat, with additional *Designer* colors available
- Curved inset panels enhance the overall look
- The base skirt completes the transformation and gives an additional branding area. Available in flat or curved panels for front and/or back of unit
- Signs not included

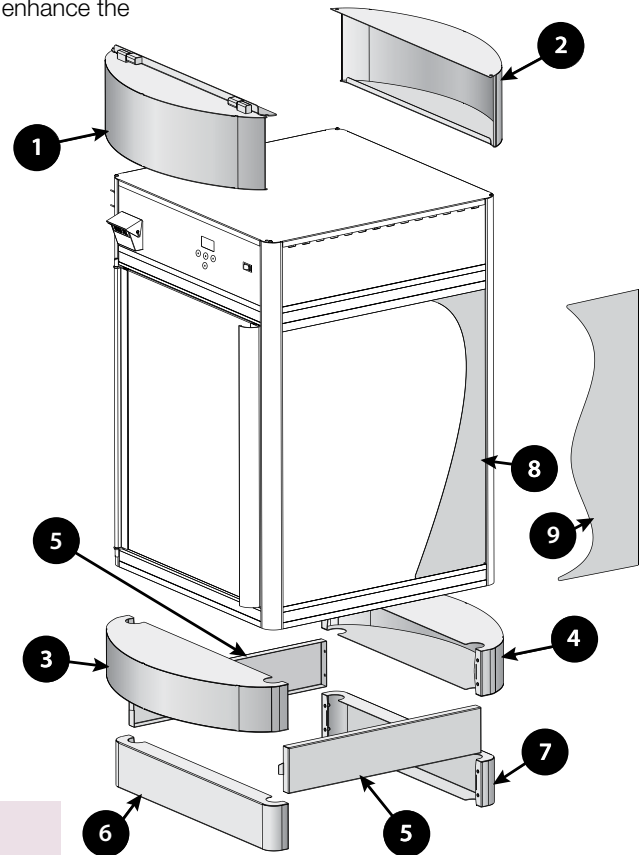

FSDT-1 with 4-tier circle rack and full Decorative Kit (signs not included)

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Black standard –			
RED	WR	Warm Red	No Charge
GRAY	GG	Gray Granite	No Charge
WHITE	WG	White Granite	No Charge
NAVY	NB	Navy Blue	No Charge
GREEN	HG	Hunter Green	No Charge
COPPER	AC	Antique Copper	No Charge

ACCESSORIES (available for purchase at any time)

Side Inserts – Must choose Designer color – Black Standard –

FSD-INSET1	Two Crescent Inset Panels for FSD models	₹8148
FSD-INSET2	Two Wave Inset Panels for FSD models	8148
FSDT-INSET1	Two Crescent Inset Panels for FSDT models	8148
FSDT-INSET2	Two Wave Inset Panels for FSDT models, Black	8148

Top Covers – Must choose Designer color – Black Standard –

FSD-CTLH	Curved Hinged Header on control side (Fits 609 W x 149 H mm sign) for FSD and FSDT models	₹28140
FSD-CUSH	Curved Header on non-control side (Fits 609 W x 149 H mm sign) for FSD and FSDT models	20496


Base Skirts – Requires 102 mm adjustable legs (not included) – Must choose Designer Color – Black Standard –

FSD-SQB	One Flat Front Panel and one Flat Back Panel (Fits 508 W x 93 H mm sign) and two Flat Side Panels (Fits 473 W x 93 mm H sign) for FSD and FSDT models	₹24276
FSD-1CB	One Curved Front Panel (Fits 647 W x 93 H mm sign) and one Flat Back Panel (Fits 508 W x 93 H mm sign) and two Flat Side Panels (Fits 473 W x 93 mm H sign) for FSD and FSDT models	43512
FSD-2CB	One Curved Front Panel and one Curved Back Panel (Fits 647 W x 93 H sign) and two Flat Side Panels (Fits 473 W x 93 mm H sign) for FSD and FSDT models	62664
F-LEGS-4	102 mm Adjustable Legs for FSD and FSDT models	₹7476
FDWD-LEGS	102 mm Adjustable Legs for FDWDE models	7476


COLORS AND FINISHES – INSIDE BACK COVER

Display Rack Selections


Racks for FDWDE Models (Page 129)



**4-Tier Circle Rack
FDWD4TCRR**
(Max. 381 mm dia. pans)
(83 mm between tiers)

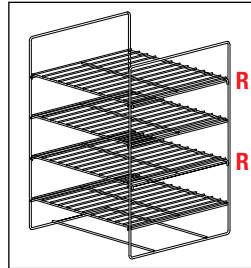


**4-Shelf Multi-Purpose
Rack FDW4SMP**
(Max. 457 x 330 mm)
(Half-Size Sheet Pans fit
FDWDE-2 and -2X models only)
(95 mm between shelves)




**3-Tier Pretzel Tree
FDW3TPT**
(149 mm between tiers)


Racks for FSD/FSDT Models (Page 130)




**FSDT 4-Tier Circle Rack
FSDT4TCR**
(Max. 483 mm dia. pans)
(117 mm between tiers)




**5-Tier Circle Rack
FSDT5TCR**
(Max. 483 mm dia. pans)
(98 mm between tiers)




**FSDT 4-Tier Pan Rack
FSDT4TPR**
(Max. 457 x 330 mm
Half-Size Sheet Pans)
(89 mm between tiers)




**FSDT 3-Shelf Angle Rack
FSDT3SAR**
(89 mm between shelves)




**FSDT 3-Tier Pretzel Tree
FSDT3TPT**
(149 mm between tiers)




**FSDT 7-Shelf Multi-Purpose
Rack FSDT7SMP**
(Max. 457 x 330 mm
Half-Size Sheet Pans)
(64 mm between shelves)



**FSD 3-Tier Circle Rack
FSD3TCR**
(117 mm between tiers)



**FSD 3-Tier Pan Rack
FSD3TPR**
(89 mm between tiers)



**FSD 5-Shelf
Multi-Purpose Rack
FSD5SMP**
(64 mm between shelves)

R Removable Shelves

Intelligent Heated Display Cabinet, Humidified

Hatco's Intelligent Heated Display Cabinet Humidified is the perfect way to showcase your pizzas and more. Regulating air temperature while at the same time balancing the humidity levels provides the best environment for food products. With 360° viewing, your food is guaranteed to get all the attention.

- Air flow pattern is designed to maintain consistent cabinet temperature without drying out food
- Air flow system enables the cabinet to recover temperature rapidly after opening and closing the door
- LCD touchscreen display on back of unit controls temperature, humidity and up to eight timers for each food location
- Energy efficient LED lighting to illuminate your food display
- USB port on back of unit makes it easy to update firmware
- Adjustable arms can move up and down the back supports (unit can hold up to six pizza arms)
- The Arm is designed to hold maximum 559 mm pizza pan



IHDC-45
shown with
accessory risers



IHDC-28
shown with
accessory two
arms and one shelf

NOTE: Water filter, strainer and tubing are included with each cabinet to be installed on water supply connection.

INTELLIGENT HEATED DISPLAY CABINETS – HUMIDIFIED

Model	Dimensions W x D x H	Cabinet Opening Dimensions (W x H)	Voltage	Watts	Amps	Approx. Ship Weight	List Price
IHDC-28	718 x 728 x 766 mm	558 x 525 mm	230	2596-3090	11.8-12.8	100 kg	₹1055040
IHDC-45	1149 x 728 x 766 mm	457 x 530 mm	230	2596-3090	11.8-12.8	122 kg	1126692


All Intelligent Heated Display Cabinet Models Feature:

Models Shipped With: **IHDC-28:** Stainless Steel unit with single french door, touchscreen controller, a lighted Power On/Off (I/O) switch, an air heating/circulation system, a humidity system, a USB port and LED display lights.

IHDC-45: Stainless Steel unit with sliding glass doors, touchscreen controller, a lighted Power On/Off (I/O) switch, an air heating/circulation system, a humidity system, a USB port, LED display lights and four adjustable arms.

Cord Location: Server side, bottom left corner.

OPTIONS AND ACCESSORIES – PAGE 135
WATER QUALITY REQUIREMENTS – PAGE 157



On all Intelligent Heated Display Cabinet Models customers must purchase arms and shelves separately to their own specifications.

Below are the options available to combine the shelves and arms

IHDC-28

4 Arms
3 Shelves
1 Shelf with 1 Pizza Arm
1 Shelf with 2 Pizza Arms
2 Shelves with 1 Pizza Arm

IHDC-45

6 Arms
3 Slanted Shelves
1 Shelf with 2 Pizza Arms
1 Shelf with 4 Pizza Arms
2 Shelves with 2 Pizza Arms



IHDC-45 shown with standard arms, accessory risers and accessory sign holders

OPTIONS (available at time of purchase only)**Designer Colors – Non-standard colors are non-returnable – Stainless Steel Standard –**

IHDCH-BK	Unit in <i>Designer Black</i> in lieu of Stainless Steel unit	₹ 42504
IHDCHBASE-BK-28	Inside base in <i>Designer Black</i> in lieu of Stainless Steel base for IHDC-28	3024
FRTDOOR-28	Front, swing out door for IHDC-28, left-hand hinge standard, matches unit color (adds 102 mm to depth)	79464
IHDCHBASE-BK-45	Inside base in <i>Designer Black</i> in lieu of Stainless Steel base for IHDC-45	3024
FRFRTDOOR-45	Front, self-closing French doors for IHDC-45, matches unit color (adds 102 mm to depth)	150528

ACCESSORIES (available for purchase at any time)

ADJARM-SS	Pizza Arm in Stainless Steel	each ₹ 16380
ADJARM-BK	Pizza Arm in <i>Designer Black</i>	each 19824
SHELF-SS-28	Shelf in Stainless Steel for IHDC-28	each 22092
SHELF-BK-28	Shelf in <i>Designer Black</i> for IHDC-28	each 22092
SHELF-SS-45	Shelf in Stainless Steel for IHDC-45	each 32508
SHELF-BK-45	Shelf in <i>Designer Black</i> for IHDC-45	each 56364
RISER12-SS	305 mm diameter x 38 mm H Riser in Stainless Steel	2520
RISER12-BK	305 mm diameter x 38 mm H Riser in <i>Designer Black</i>	3612
DOORLOCKIHDCH	Front Door lock for IHDC-28 only	2268
REGKIT	Water Pressure Regulator Kit (regulator, gauge and shut-off valve)	34440

SIGN HOLDERS (signs not included) – recommended sign size: 50 x 88 mm –

SGNHOLD-BASE-SS	Sits on base of unit in Stainless Steel	each ₹1596
SGNHOLD-BASE-BK	Sits on base of unit in <i>Designer Black</i>	each 2940
SGNHOLD-LARM-SS	Customer left-hand side in Stainless Steel (clips onto Arm)	each 1764
SGNHOLD-LARM-BK	Customer left-hand side in <i>Designer Black</i> (clips onto Arm)	each 3444
SGNHOLD-RARM-SS	Customer right-hand side in Stainless Steel (clips onto Arm)	each 1764
SGNHOLD-RARM-BK	Customer right-hand side in <i>Designer Black</i> (clips onto Arm)	each 3444

FOOD PANS AND TRIVETS – PAGE 155
COLORS AND FINISHES – INSIDE BACK COVER

Mini Display Warmers

The Hatco Mini Display Warmer is perfect for cookies, pastries, wrapped or boxed sandwiches or any other product that does not require humidity. Hot air circulates throughout the entire cabinet, keeping food at safe-serving temperatures. The small footprint takes up little of your valuable counterspace while merchandising your breakfast, lunch or dinner offerings.



Magnetically adjustable shelves provide flexibility for a variety of product choices

- Magnetically adjustable shelves allow horizontal or slanted displays
- Tempered glass sides and incandescent light showcase your food
- Thermostatic control with rocker switch
- Field reversible door hinge location

- Available as a 1-door or a 2-door pass-through model
- Doors may be field converted to any side
- Optional black hood with backlit graphic sign cutout that can be rotated in field to face any side (sign included)



MDW-1X with standard *Designer* color and optional hood with backlit sign cut out on one side (sign included)

MINI DRY DISPLAY WARMERS – NON-HUMIDIFIED

Model	Description	Dimensions W x D x H	Opening Dimensions W x H	Voltage Single Phase	Approx. Ship Weight	List Price
MDW-1X	1 door w/3 shelves	400 x 432 x 646 mm	315 x 396	230	21 kg	₹238980
MDW-2X	2 doors w/3 shelves	400 x 465 x 646 mm	315 x 396	230	24 kg	248304

All Mini Display Warmer Models Feature:

Door Hinges: Control Side: Left-hand side.

Customer Side (Two-door models only): Right-hand side.

Cord Location: Facing controls, lower right corner.


OPTIONS (available at time of purchase only)

Designer Color Posts for Base and Top Trim –

Non-standard colors are non-returnable – Black standard –

RED	Warm Red	No Charge
GRAY	Gray Granite	No Charge
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge
BCKLIT-MDW	Black Hood with Backlit Sign cut out on one side - Sign included	₹12096

COLORS AND FINISHES – INSIDE BACK COVER



Macho Nacho® Chip Warmers

Keep your nacho chips hot, fresh and crisp with Hatco's Macho Nacho Chip Warmer. This highly-visible heated merchandiser circulates air to prevent the loss of natural oils, eliminating the need to frequently replace stale chips.

- Keeps chips hot, fresh and crisp longer, reducing refill time and minimizing waste
- Specialty cabinet to hold and merchandise bulk nacho chips
- Special ductwork forces dry heat through chips from the bottom up
- Special two-door access for easy loading and serving
- 11 kg or 18 kg capacity
- Shatter-resistant incandescent lights illuminate the holding areas and emphasize the product



FDWD-1-MN



FST-1-MN shown in standard Bronze finish

CHIP WARMERS – NON-HUMIDIFIED

Model	Dimensions W x D x H	Cabinet Opening (W x H)		Voltage	Watts	Amps	Product Capacity	Approx. Ship Weight	List Price
		Upper Door	Lower Door						
FDWD-1-MN	492 x 608 x 732 mm	416 x 233	416 x 233	220, 240	950-1129	4.3-4.7	11 kg	46 kg	₹374640
FST-1-MN	581 x 686 x 831 mm	474 x 286	474 x 252	220, 240	1219-1252	5.6-5.2	18 kg	60 kg	526176

All Chip Warmer Models Feature:

Decal Size: **FDWD-1-MN**: 423 W x 139 H mm.

FST-1-MN: 473 W x 152 H mm.

Cord Location: Facing controls, left-hand side panel, lower right corner.

F x x x - 1 - M N

FDWD = 11 kg Chip Capacity
FST = 18 kg Chip Capacity

Macho Nacho Unit
Single Side Opening

Flav-R-Savor® Portable Holding Cabinets

Hatco's energy efficient Flav-R-Savor® Portable Holding Cabinets will keep prepared foods at optimum serving temperatures for hours. The thermostatically-controlled heat and humidity allows food to be prepared in advance of peak serving periods.

- Allows you to hold product longer while saving you money through increased energy efficiencies
- Electronic control with digital read out, temperature range of 27°- 93°C and humidity controller
- The lower temperature range of 27°- 38°C can be used for proofing all types of breads
- All stainless steel interior
- Doors are field convertible from left to right

- No heating element in direct contact with water makes the unit easier to clean
- Accommodates Gastronorm pans
- Stacking kit available



FSHC-7W1-EE shown in Designer Black, with optional bumper kit, and right-hand hinged door



PORTABLE HOLDING CABINETS

Model	Description	Dimensions W x D x H Height includes standard casters	Interior Cabinet Capacity (W x D)	Voltage 50/60 Hz	Watts	Amps	Approx. Ship Weight	List Price
FSHC-5W1-EE	Single Door	661 x 794 x 913 mm	532 x 676 mm	230	1182	4.9-5.1-5.4	113 kg	₹766080
FSHC-7W1-EE	Single Door	661 x 794 x 989 mm	532 x 676 mm	230	1182	4.9-5.1-5.4	101 kg	805140
FSHC-7W2-EE	2-Door Pass-Through	661 x 877 x 989 mm	532 x 676 mm	230	1182	4.9-5.1-5.4	105 kg	850080

All Portable Holding Cabinet Models Feature:

Top Surface Dimensions: 654 W x 724 D mm.

Models Shipped with: 1829 mm cord and plug, 102 mm diameter casters (with 130 mm clearance), stainless steel heavy-duty door with left-hand door hinge and adjustable rack slides (seven for the -7WX-EE units, and five for the -5W1-EE unit).

Pan Capacity: -5W1-EE: 10 full sized sheet pans or 2/1 Gastronorm pans on 41 mm spacing, 5 full sized sheet pans or 2/1 Gastronorm pans on 83 mm spacing, 20 full sized hotel pans or 1/1 Gastronorm pans on 41 mm spacing, 10 full sized hotel pans or 1/1 Gastronorm pans on 83 mm spacing.
-7Wx-EE: 14 full sized sheet pans² or 2/1 Gastronorm pans on 35 mm spacing, 7 full sized sheet pans or 2/1 Gastronorm pans on 70 mm spacing, 14 hotel sized pans or 1/1 Gastronorm pans on 35 mm spacing.

Water Tank Capacity for Humidity System: 4 liters.

Cord Location: Recessed, back of unit, upper right side.

² With purchase of extra pan slides.

WATER QUALITY REQUIREMENTS – PAGE 157

OPTIONS (available at time of purchase only)

Colors (Side Panels) – Non-standard colors are non-returnable – Black Standard –

SS Stainless Steel ₹20412

Colors (Top) – Non-standard colors are non-returnable – Black Standard –

SS Stainless Steel ₹20412

EE-GLASS Glass Door in lieu of Stainless Steel door (is not Energy Star qualified) 25368

EE-LPCAST Low Profile Casters (FSHC-5W1-EE model only) (deduct 57 mm from height) No Charge

EE-PLATFORM Platform for mounting directly on a counter in lieu of casters (deduct 105 mm from height) No Charge


EE-STACK-BLK Designer Black Powdercoated Stacking Hardware mounted to bottom of cabinet for two FSHC-7W1 or two FSHC-5W1 units in lieu of casters (cannot have legs on lower unit) No Charge

EE-STACK-SS Stainless Steel Stacking Hardware mounted to bottom of cabinet for two FSHC-7W1 or two FSHC-5W1 units in lieu of casters (cannot have legs on lower unit) No Charge

EE-BUMPER Bumper Hardware - only for use with standard casters (add 3 mm to height) ₹48804

EE-4LEGS 102 mm Legs - in lieu of casters (deduct 13 mm from height) No Charge

EE-6LEGS 152 mm Legs - in lieu of casters (add 45 mm to height) No Charge




ACCESSORIES (available for purchase at any time)

EE-1-SLIDE Extra Pan Slides pair ₹9408

FOOD PANS AND TRIVETS – PAGE 155

COLORS AND FINISHES – INSIDE BACK COVER



Flav-R-Savor® Low Profile, Humidified, Portable Holding Cabinets

Prepare food in advance of peak serving periods and safely hold it at optimum serving temperatures with the Flav-R-Savor® Portable Holding Cabinet. Thermostatically-controlled heat and humidity allows you to hold product for hours.

- Thermostatically-controlled heat and humidity holds hot food at optimum serving temperatures longer
- Allows preparation of food in advance of peak serving periods
- Accommodates Gastronorm pans
- Electrical components, controls, water reservoir and digital temperature readout are located at the top for easy access
- Reduced height – less than 762 mm high and wider footprint for increased capacity

- Insulated side walls, field reversible glass doors, large swivel casters with wheel locks and 1829 mm recessed cord and plug are standard
- Stacking kit available



FSHC-6W1 with accessory food pans

LOW PROFILE HOLDING CABINETS

Model	Description	Dimensions (W x D x H) Height includes standard casters	Opening Dimensions W x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
FSHC-6W1	1 Door	645 x 751 x 816 mm	546 x 483	220	1697	76 kg	₹649824
FSHC-6W2 [†]	2 Doors	645 x 811 x 816 mm	546 x 483	220	1697	82 kg	694512

[†] MFSHC-6W2 is a two-door pass-through single cabinet, not two units stacked.

All Low Profile Holding Cabinet Models Feature:

Top Surface Dimensions: 645 W x 657 D mm.

Models Shipped with: 1829 mm cord and plug, 102 mm diameter casters (with 130 mm clearance), six sets of adjustable angle slides.

Pan Capacity: Six 457 W x 660 D mm sheet pans or six 2/1 Gastronorm pans on 76 mm centers, eleven 457 W x 660 D mm sheet pans[‡], eleven 2/1 Gastronorm pans on 38 mm centers[‡], or twelve 508 W x 305 D x 64 H mm hotel pans.

Water Tank Capacity for Humidity System: 3 liters.

Cord Location: Recessed, back of unit, upper right side.

[‡] With purchase of extra pan slides.

WATER QUALITY REQUIREMENTS – PAGE 157

OPTIONS (available at time of purchase only)

Colors (Side Panels) – Non-standard colors are non-returnable – Silver Gray Standard –

BLACK	Designer Black	₹20412
SS	Stainless Steel	20412

Colors (Top) – Non-standard colors are non-returnable – Silver Gray Standard –

BLACK	Designer Black	₹20412
SS	Stainless Steel	20412

6W-SS-DR Stainless Steel Door in lieu of Glass Door ₹ 8820

HD-SS-DR Heavy-Duty Stainless Steel Door with Positive Latch Handle 36372

6W1-LPCAST 51 mm Low Profile Locking Casters in lieu of Standard Casters (51 mm diameter with 76 mm clearance) (Overall Height 756 mm) No Charge

6W1-STACK Silver Gray Stack Hardware mounting on top of cabinet for two FSHC-6W1 units in lieu of Casters 8400

CORDWIND Bracket for holding Cord during transport 3360


ACCESSORIES (available for purchase at any time)

6W1-SLIDE Extra Pan Slides pair ₹9408


FOOD PANS AND TRIVETS – PAGE 155

COLORS AND FINISHES – INSIDE BACK COVER

6W1-SLIDE
Accessory

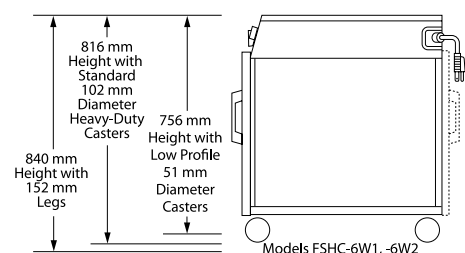

Models FSHC-6W1, -6W2

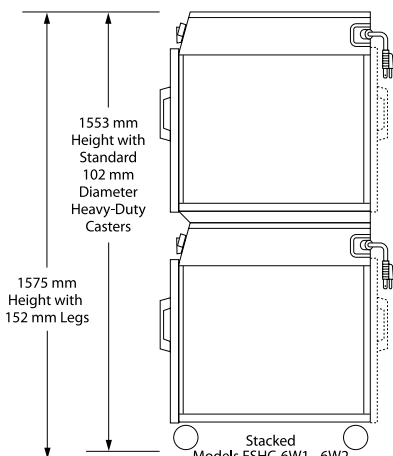

Stacked
Models FSHC-6W1, -6W2

Flav-R-Savor	FSHC - 6 W x	Quantity of Doors
Holding Cabinet		Wide
		Full-Size Sheet Pan Capacity

Flav-R-Savor® Humidified Portable Holding Cabinets

Prepare food in advance of peak serving periods and safely hold it at optimum serving temperatures with the Flav-R-Savor® Portable Holding Cabinet. Thermostatically-controlled heat and humidity allows you to hold product for hours.

- Thermostatically-controlled heat and humidity holds hot food at optimum serving temperatures longer
- Allows preparation of food in advance of peak serving periods
- Accommodates Gastronorm pans
- Electrical components, controls, water reservoir and digital temperature readout are located at the top for easy access
- Insulated side walls, field reversible glass doors, large swivel casters with wheel locks and 1829 mm recessed cord and plug are standard
- Stacking kit available



FSHC-7-1 with standard 102 mm casters and accessory food pans

PORTABLE HOLDING CABINETS

Model ^o	Description	Dimensions (W x D x H) <i>Height includes standard casters</i>	Cabinet Opening Dimensions (W x H)	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
FSHC-7-1	1 Door	578 x 753 x 892 mm	470 x 559 mm	220	1697	79 kg	₹655620
FSHC-7-2^u	2 Doors	578 x 812 x 892 mm	470 x 559 mm	220	1697	82 kg	700728

^o 7 slides on each side. Sheet pans not included. 6-shelf multi-purpose rack can be substituted for angle slides at no charge.

^u FSHC-7-2 is a two-door pass-through single cabinet, not two units stacked.

All Portable Holding Cabinet Models Feature:

Top Surface Dimensions: W 575 x H 657 mm.

Models Shipped with: 1829 mm cord and plug, 102 mm diameter casters (with 130 mm clearance), seven sets of adjustable angle slides for W 457 x D 660 mm pans or W 305 x D 508 mm pans.

Pan Capacity: Seven 457 W x 660 D mm sheet pans on 76 mm centers, or seven 508 W x 305 D x 64 H mm hotel pans, or seven 1/1 Gastronorm pans.

Water Tank Capacity for Humidity System: 3 liters.

Cord Location: Recessed, back of unit, upper right side.

WATER QUALITY REQUIREMENTS – PAGE 157

OPTIONS (available at time of purchase only)

Colors (Side Panels) – Non-standard colors are non-returnable – Silver Gray Standard –

BLACK	Designer Black	₹20412
SS	Stainless Steel	20412

Colors (Top) – Non-standard colors are non-returnable – Silver Gray Standard –

BLACK	Designer Black	₹20412
SS	Stainless Steel	20412

SS-DR Stainless Steel Door in lieu of Glass Door **₹ 8820**

HD-SS-DR Heavy-Duty Stainless Steel Door with Positive Latch Handle **36372**

LPCAST 51 mm Low Profile Casters in lieu of standard Casters (51 mm diameter with 76 mm clearance) **3360**

4LEGS 102 mm Adjustable Legs in lieu of standard Casters **No Charge**

6SS 152 mm Stainless Steel Legs in lieu of standard Casters **No Charge**

7-1-STACK Silver Gray Stacking Hardware mounted to top of cabinet for two FSHC-7-1 units in lieu of Casters **11676**

CORDWIND Bracket for holding Cord during transport **3360**





ACCESSORIES (available for purchase at any time)

SLIDEWIRE Wire Shelf **per shelf ₹12348**

FOOD PANS AND TRIVETS – PAGE 155

COLORS AND FINISHES – INSIDE BACK COVER

SLIDEWIRE
Accessory

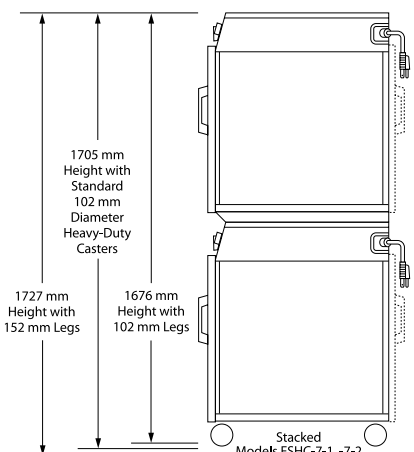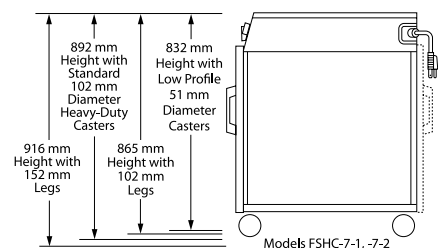

Flav-R-Savor® Heated Air Curtain Cabinets

The patented Flav-R-Savor® Heated Air Curtain Cabinet effectively and safely holds hot food hot without the use of doors, allowing immediate access to product. Warm air at the front of the cabinet is forced downward, through the ducts above the opening, forming a “curtain” of heated air. A portion of the heated air is drawn toward the rear of the cabinet, warming each pan.

- Perfect for holding wrapped or sealed product like tortillas, burritos and ribs, as well as product on sheet pans like biscuits, hamburger patties and baked potatoes
- Available in 2-pan and 3-pan models, single opening
- The 2-pan pass-through accommodates two full-size sheet pans or four half-size sheet pans, and the 4-pan unit accommodates four full-size sheet pans or eight half-size sheet pans
- Easy to use digital controls, a lighted On/Off switch and a 1829 mm cord and plug



FS2HAC-4PT 4-tier pass-through with accessory food pans

HEATED AIR CURTAIN CABINETS

Model ‡	Description	Dimensions W x D x H	Cabinet Opening Dimension W x H	Voltage Single Phase	Hz	Watts	Approx. Ship Weight	List Price
FSHAC-2	2-Tier Warmer	257 x 581 x 460 mm	464 x 232 mm	220	50/60	1750	46 kg	₹525756
FSHAC-3	3-Tier Warmer	257 x 581 x 775 mm	464 x 460 mm	220	50/60	1750	52 kg	548772
FS2HAC-2PT	2-Tier Pass Through	613 x 994 x 468 mm	459 x 206 mm	220	50/60	2538	75 kg	798168
FS2HAC-4PT	4-Tier Pass Through	613 x 994 x 671 mm	464 x 410 mm	220	50/60	3338	86 kg	871584


‡ Height includes 102 mm legs.

All Air Curtain Cabinet Models Feature:

Cord Location: FSHAC-2, -3: Top of unit towards the back, middle.

FS2HAC-2PT, -4PT: Top of unit towards the back, left side.

FOOD PANS AND TRIVETS – PAGE 155



Induction Equipment



Drop-In Induction Dry Well


Hatco's Drop-In Induction Dry Well features a simple, robust design and offers an energy efficient, plumbing-free solution to any food holding needs. This unit is adjustable with little effort and can hold either a 64 mm or 104 mm deep, full-size pan. The well evenly and consistently heats the pan to keep foods hot and fresh.

- Durable and tough glass-ceramic well bottom can be easily adjusted to accommodate a 64 mm or 104 mm deep pan
- Made for use with normal, full-size, ½-size, ⅓-size & ¼-size, stainless steel pans
- Contains two heat zones with two temperature sensors in each zone
- An easy-to-use, mountable control panel that can be adjusted by temperatures in Fahrenheit, Celsius or by preset temperature levels between 66° and 99°C
- Features a sensor that prohibits the unit to turn on unless a pan is present
- Can be top or bottom mounted into a countertop




IWELB-FUL-A
with full-size pan
and IWELBEZEL-1N
accessories (Not Included)

Control Panel



IWELB-FUL-A
adjusted for a 64 mm deep pan



IWELB-FUL-A
adjusted for a 104 mm deep pan

DROP-IN INDUCTION DRY WELL

Model	Item No.	Dimensions W x D x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
IWELB-FUL-A	IWELBFULABS	606 x 394 x 229 mm	220-230-240	720	20 kg	₹247800

All Drop-In Induction Dry Well Models Feature:

Models Shipped with: A 1981 mm cable from the base to the control and a 1803 mm cord and plug.

Cord Location: Bottom right side.

ACCESSORIES (available for purchase at any time)

Pans –

ST PAN 1/3	Third-Size Stainless Steel Pan	₹5712
ST PAN 1/2	Half-Size Stainless Steel Pan	6552
ST PAN 2	Full-Size Stainless Steel Pan, 64 mm depth	7812
ST PAN 4	Full-Size Stainless Steel Pan, 104 mm depth	9828

Bezels –

IWELBEZEL-1N	For use with one unit	No Charge
IWELBEZEL-2N	For use when ganging two units	₹17976
IWELBEZEL-3N	For use when ganging three units	25284
IWELBEZEL-4N	For use when ganging four units	35196

Trivets –

TRIVET (1/2) SS	Half-Size – 254 mm W x 194 mm D	₹10584
TRIVET SS	Full-Size – 259 mm W x 457 mm D	14700

ST PAN 1/3

ST PAN 1/2


ST PAN 2

ST PAN 4



TRIVET
(1/2)SS

TRIVET SS



IWELBEZEL-2N

IWELBEZEL-3N

IWELBEZEL-1N

IWELBEZEL-4N



IWELB - FUL - A

Induction Dry Well

Built-In

A = Adjustable to 64 or 104 mm Depth

FUL = Full-Size Pan



Rapide Cuisine® Countertop High-Powered/Heavy-Duty Induction Hob

Hatco's Rapide Cuisine® High-Powered/Heavy-Duty Induction Hob offers industry leading features and true back-of-house power in a commercial kitchen-proof package.

The unit features our Magnetic Power System (MPS) to deliver the highest power in its class! It has User Programmable Presets (UPP) for repeat menu items and a food temperature probe for more accurate cooking, plus a timer, high resolution color display and convenient power and temperature modes.

- Commercial kitchen ready. Heavy gauge stainless steel housing with side impact protection for the top
- Four surface temperature sensors offer the most accurate control in its class
- Culinary equivalent of up to 31,000 BTUs gas
- High resolution TFT (thin film transistor) display instantly advises the operator of precise power (1 to 100), temperature (°C or °F in one degree increments) and time control (30 seconds to 10 hours)
- Programmable mode where the operator can create preset programs for consistent cooking cycles
- Includes a grease filter and features conformal-coated boards
- Easy to use color-coded selectable functions
- Large adaptive control for precise, fine control (slow turns) to spanning the full range in a single twist (fast turns)
- Pan Sense Technology (PST) activates the unit only when a suitable pan is placed on top
- Patterned, glass-ceramic top that is durable, easy to clean and helps scratches from heavy use become less noticeable
- Easy to clean, fully-sealed top stops grease or moisture from penetrating the unit, even if the top gets broken
- Automatic shut-off to prevent overheating
- Withstands high ambient kitchen temperatures up to 51°C
- USB port for downloading updates



IRNG-PC1-36

Close up of patterned black glass-ceramic top – helps prevent noticeable scratches due to heavy use



Includes a food temperature probe which facilitates highly accurate cooking

COUNTERTOP HIGH-POWERED/HEAVY-DUTY INDUCTION HOB

Model	Item No.	Dimensions W x D x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
IRNG-PC1-36	IRNGPC136SBCEE	352 x 471 x 94 mm	220-240	3300-3600	10 kg	₹199836

All Countertop High-Powered/Heavy-Duty Induction Hob Models Feature:

Magnetic Pan Size: Maximum pan size 356 mm, minimum pan size 102 mm.

Models Shipped with: 1800 mm cord and plug and temperature probe.

Cord Location: Rear left bottom base corner.




Rapide Cuisine® Drop-In High-Powered/Heavy-Duty Induction Hob

Hatco's Rapide Cuisine® Drop-In High-Powered/Heavy-Duty Induction Hob offers industry-leading features and true back-of-house power in a commercial kitchen-proof package.

The unit can be mounted flush or near flush with the optional trim ring. It features our Magnetic Power System (MPS) to deliver the highest power in its class! It has User Programmable Presets (UPP) for repeat menu items and a food temperature probe for more accurate cooking, plus a timer, high resolution color display and convenient power and temperature modes.

- Four surface temperatures sensors offer the most accurate control in its class
- Culinary equivalent of up to 31,000 BTUs gas
- High resolution TFT (thin film transistor) display instantly advises the operator of precise power (1 to 100), temperature (°C in one degree increments) and time control (30 seconds to 10 hours)
- Programmable mode so the operator can create preset programs for consistent cooking cycles
- Includes conformal-coated boards
- Easy to use color-coded selectable functions
- Large adaptive control for precise, fine control (slow turns) to spanning the full range in a single twist (fast turns)
- Pan Sense Technology (PST) activates the unit only when a suitable pan is placed on top
- Patterned, glass-ceramic top that is durable, easy to clean and helps scratches from heavy use appear less noticeable
- Easy to clean, fully-sealed top stops grease or moisture from penetrating the unit, even if the top gets broken
- Automatic shut-off to prevent overheating
- Withstands high ambient kitchen temperatures (up to 51°C)
- USB port for downloading updates

Close up of patterned black glass-ceramic top – helps prevent noticeable scratches due to heavy use



Includes food temperature probes which facilitates highly accurate cooking

Control Panel



IRNG-PB1-36
shown in the standard finishes

DROP-IN HIGH-POWERED/HEAVY-DUTY INDUCTION HOB

Model	Item No.	Dimensions W x D x H	Voltage Single Phase	Watts	Approx. Ship Weight	List Price
IRNG-PB1-36	IRNGPB136SBCEE	343 x 368 x 91 mm	220-240	3300-3600	10 kg	₹210840

All Drop-In High-Powered/Heavy-Duty Induction Hob Models Feature:

Model Ships with: 1300 mm cable from the base unit to the control panel, 1800 mm cord and plug and temperature probe.

Cord Location: Rear right bottom base corner.

ACCESSORY (available for purchase at any time)

Holds unit nearly flush on the counter (for use where chair-step routing of a countertop material is not possible, but a flush mount look is desired) –

Trim Ring in Stainless Steel (holds unit nearly

flush on a stainless steel or any similar material countertop)

₹5544



Rapide Cuisine® Countertop High- Powered/Heavy- Duty Dual Induction Hobs

Hatco's Rapide Cuisine® High-Powered/Heavy-Duty Dual Induction Hobs offer industry-leading features and true back-of-house power in a commercial kitchen proof package. These are dual units that are configured either front-to-back or side-to-side to optimize your countertop footprint.

The unit features optimization systems like Magnetic Power System (MPS) to deliver the highest power in its class; safety features like Pan Sense Technology (PST), which means the unit only activates when a pan is present; and convenience features like User Programmable Presets (UPP), where up to six menu items using three stages of cooking can be programmed and saved — great for repeat menu items. You can also choose a power level and a doneness temperature target when using the food temperature probe(s).

- Food temperature probes for more accurate cooking
- Timers (up to 10 hours, more if in program mode)
- High resolution color displays
- Power (0-100) or temperature (°F or °C modes)
- Heavy gauge stainless steel housing with side impact protection for the top
- Eight surface temperature sensors
- Culinary equivalent of up to 31,000 BTUs gas per burner
- Grease filters
- Highest ambient tolerance on the market 51°C- it's tough
- USB ports for downloading updates




Includes food temperature probes which facilitates highly accurate cooking



IRNG-PC2F-36
Front-to-back configuration
shown in the standard finishes

Close up of patterned black glass-ceramic top – helps prevent noticeable scratches due to heavy use



IRNG-PC2S-36
Side-to-side configuration shown
in the standard finishes


COUNTERTOP HIGH-POWERED/HEAVY-DUTY DUAL INDUCTION HOBS

Model	Item No.	Configuration	Dimensions W x D x H	Voltage Single Phase	Watts (per coil)	Total Power (watts)	Approx. Ship Weight	List Price
Front to Back Ranges								
IRNG-PC2F-16	IRNGPC2F16BS	Front to Back	356 x 753 x 133 mm	220-240	1430-1560	2860-3120	19 kg	₹391104
IRNG-PC2F-36	IRNGPC2F36IEC	Front to Back	356 x 753 x 133 mm	220-240	3300-3600	6600-7200	19 kg	434364
Side to Side Ranges								
IRNG-PC2S-16	IRNGPC2S16BS	Side to Side	630 x 484 x 114 mm	220-240	1430-1560	2860-3120	19 kg	₹391104
IRNG-PC2S-36	IRNGPC2S36IEC	Side to Side	630 x 484 x 114 mm	220-240	3300-3600	6600-7200	19 kg	434364

All Countertop High-Powered/Heavy-Duty Dual Induction Hob Models Feature:

Models Shipped with: 1800 mm cord and plug (includes food temperature probes).

Cord Location: Rear left bottom base corner.

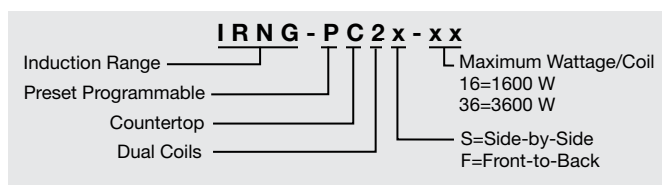

Rapide Cuisine® Drop-In High- Powered/Heavy- Duty Dual Induction Hobs

Hatco's Rapide Cuisine® High-Powered/Heavy-Duty Drop-In Dual Induction Ranges offer industry-leading features and true back-of-house power in a commercial kitchen proof package. These are dual units that are configured either front-to-back or side-to-side to optimize your countertop footprint.

The unit features optimization systems like Magnetic Power System (MPS) to deliver the highest power in its class; safety features like Pan Sense Technology (PST), which means the unit only activates when a pan is present; and convenience features like User Programmable Presets (UPP), where up to six

menu items using three stages of cooking can be programmed and saved -- great for repeat menu items. You can also choose a power level and a doneness temperature target when using the food temperature probe(s).

- Food temperature probes for more accurate cooking
- Timers (up to 10 hours, more if in program mode)
- High resolution color displays

- Power (0-100) or temperature (°F or °C modes)
- Heavy gauge stainless steel housing with side impact protection for the top
- Eight surface temperature sensors
- Culinary equivalent of up to 31,000 BTUs gas per burner
- Grease filters
- Highest ambient tolerance on the market 51°C (124°F)- it's tough
- USB ports for downloading updates



IRNG-PB2-36
control panel



Includes food temperature probes which facilitate fast and highly accurate cooking

DROP-IN HIGH-POWERED/HEAVY-DUTY DUAL INDUCTION HOBS

Model	Item No.	Dimensions W x D x H	Voltage Single Phase	Watts (per coil)	Total Power (watts)	Approx. Ship Weight	List Price
IRNG-PB2-16	IRNGPB216BS	350 mm x 699 mm x 157 mm	220-240	1430/1495/1560	2860/2990/3120	19 kg	₹356496
IRNG-PB2-36	IRNGPB236IEC	350 mm x 699 mm x 157 mm	220-240	3300/3450/3600	6600/6900/7200	19 kg	384720

All Drop-In High-Powered/Heavy-Duty Dual Induction Hob Models Feature:

Models Shipped with: Two 700 mm cables from the base to the control, an 1800 mm cord and plug, and two food temperature probes.


Cord Location: Rear left bottom base corner.

ACCESSORY (available for purchase at any time)

Holds unit nearly flush on the counter (for use where chair-step routing of a countertop material is not possible, but a flush mount look is desired) –

Trim Ring in Stainless Steel (holds unit nearly flush on a stainless steel or any similar material countertop)

TRIM-PB2-36 ₹10920

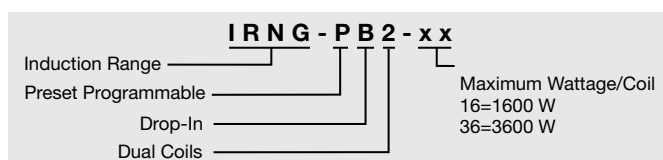

Palletti® Countertop Induction Warmer

Hatco's Palletti® Countertop Professional Induction Warmer offers a safe, efficient and attractive way to keep hot foods hot. Perfect for serving applications such as buffet lines and hospitality suites. The warmer has five simple and precise settings, which allow for a wide variety of foods to be held both safely and at optimum quality. The units are also memory retentive, so once turned off and back on, the last setting will resume.

This unit has a low-profile and ultra-thin design in all black so the focus remains on the food rather than the equipment.

- Portable and adaptable for buffets and many other front-of-the-house applications to give the most attractive and visible food presentations
- Energy efficient, quiet and safe operation with no open flames as with traditional warming presentations
- Pan Sense Technology (PST) activates the unit only when a suitable pan is placed on top
- Elegant, contemporary, low-profile design with a bold black housing and durable, black glass-ceramic top that is easy to clean
- Features a control panel with a standby key, temperature control arrow keys and temperature setting indicators
- Automatic shut-off to safely prevent overheating
- Low wattage warmers can be interconnected with multiple units to one electrical outlet resulting in greater energy efficiency
- Maximum number of interconnected (daisy chained) units is 5



IWRM-CD1-05
(Shown with three Daisy Chain Countertop Induction Warmers interconnected to one power cord)

DAISY CHAIN COUNTERTOP INDUCTION WARMER

Model	Item No.	Dimensions W x D x H	Voltage Single Phase	Watts	Amps	Approx. Ship Weight	List Price
IWRM-CD1-05	IWRMCD15BBS	330 x 450 x 57 mm	220-240	500	2.3-2.1	6 kg	₹109620


All Daisy Chain Countertop Induction Warmer Models Feature:

Maximum number of interconnected units: 5 units

Models Shipped with: 1800 mm cord and plug and a 432 mm interconnecting cord.

Cord Location: Rear right bottom base corner.

Interconnecting Cord Location: Rear left and right bottom base corner.

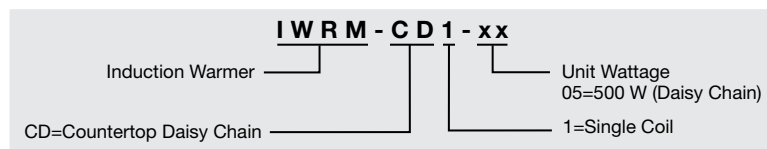

Palletti® Drop-In Induction Warmers

Hatco's Palletti® Drop-In Professional Induction Warmers offer a safe, efficient and attractive way to keep hot foods hot. Perfect for serving applications such as buffet lines and hospitality suites. The warmer has five simple and precise settings, which allow for a wide variety of foods to be held both safely and at optimum quality. The units are also memory retentive, so once turned off and back on, the last setting will resume.

This unit can be mounted flush or near flush with the optional Trim Ring.

- Adaptable for buffets and many other front-of-the-house applications to give the most attractive and visible food presentations
- Pan Sense Technology (PST) activates the unit only when a suitable pan is placed on top
- Once installed the glass-ceramic top never needs to be removed. For service or replacement, the lower housing can be removed separately.
- Energy efficient, quiet and safe operation with no open flames as with traditional warming presentations
- Black glass-ceramic top is durable and easy to clean
- Safety features and convenience features such as automatic shut-off to prevent overheating
- Includes remote control panel and cord



DROP-IN INDUCTION WARMERS

Model	Item No.	Dimensions W x D x H	Glass- Ceramic Top	Voltage Single Phase	Watts	Amps	Approx. Ship Weight	List Price
IWRM-B1-1313-05	IWRMB113135BBS	330 x 330 x 108 mm	Black	220-240	500	2.3-2.1	6 kg	₹98700
IWRM-B1-1313-05	IWRMB113135WBS	330 x 330 x 108 mm	White	220-240	500	2.3-2.1	6 kg	98700

All Drop-In Induction Warmer Models Feature:


Models Shipped with: 1000 mm cable from the base to the control and 1800 mm cord and plug.

Cord Location: Rear left bottom base corner.

ACCESSORIES (available for purchase at any time)

TRIM-IWRM-1B	Trim Ring in Stainless Steel (holds unit nearly flush on a stainless steel counter or any similar material)	₹5040
IWRM-FLUSHBKT	Flush Mount Bracket	6552

NOTE: Three installation options for a flush or near-flush look: see manual for details.

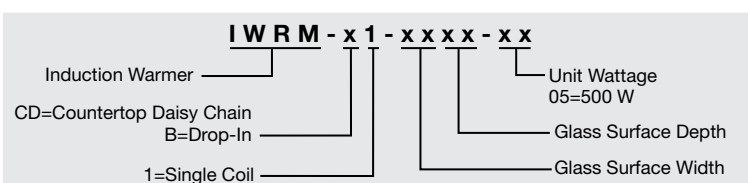

Light Cooking Equipment



Panini Grills

The Hatco Panini Grill is designed to help you expand your menu and boost your sales. It features grooved or flat surfaces to accommodate all your grilling needs, making it perfect for preparing a variety of dishes, from sandwiches and quesadillas to chicken and steak. With this versatile grill, you can easily cook a wide range of items right on your countertop, eliminating the need for a dedicated grill space. The digital controls for time and temperature make it simple to use, making it a fantastic addition to any kitchen setup.

- Adjustable time/temperature controls allow the operator to set the precise temperature for the right amount of time
- Exclusive heating elements provide exceptional heat distribution throughout the entire grill plate (top and bottom), ensuring even cooking
- Compact design is suitable for any location, and the easy-to-clean stainless steel frame and aluminum grill plates provide durability
- Self-adjusting top grill plate has the ability to grill food products of different thickness and size. Maximum product thickness is 75 mm
- Maximum temperature of 260°C
- Comes with a scraper and removable grease trough for easy clean up between uses



PG14G-1
Grooved plates



PG14F-1
Flat plates




PG14FG-1
Grooved top plate,
Flat bottom plate

PANINI GRILL							
Plate Description							
Model	Bottom Plate	Top Plate	Dimensions (W x D x H)	Voltage	Watts	Amps	List Price
PG14G-1	Grooved	Grooved	427 x 440 x 217 mm	220-240	1610-1920	7.3-8	₹155064
PG14F-1	Flat	Flat	427 x 440 x 217 mm	220-240	1610-1920	7.3-8	155064
PG14FG-1	Flat	Grooved	427 x 440 x 217 mm	220-240	1610-1920	7.3-8	155064

ACCESSORIES (available for purchase at any time)

PG SCRAPER ₹672

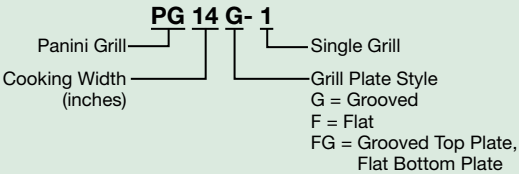

Light Cooking Equipment

Snack System

The Hatco/Suntec Snack System will help expand your menu and your sales. With a single or dual electric baker, you can easily switch the replaceable plates to serve breakfast items, lunch foods and a variety of snacks in between. Freshly bake as many or few items as you need, resulting in no waste at the end of the day. Add more variety to your menu in small quantities and increase sales according to the season, time of day and location.

- Adjustable time/temperature controls enable operators to cook continuous, consistent quality products
- Exclusive heating elements provide exceptional heat distribution throughout the entire cooking plate, ensuring even cooking of each product
- Four programmable preset buttons for each cooking cycle. A cooking cycle consists of three different settings:
 - Temperature
 - Time
 - Top Cooking Plate Power
- One-touch release with latch opener for easy plate replacement
- Removable plates are easily cleaned with warm, soapy water
- Compact design is suitable for any location
- Adjustable temperature allows for multiple menu options

NOTE: Comes with standard Round Belgian Waffle Plates and one additional set of plates of your choosing.



SNACK-1 with accessory Chelky plate



SNACK-2 with standard Belgian plate

SNACK SYSTEM

Model	Item #	Description	Dimensions (W x D x H)	Voltage	Watts	Amps	Approx. Ship Weight	List Price
SNACK-1	SNACK1.BS	Single	264 x 446 x 203 mm	220-230-240	823-980	3.7-4.0	11 kg	₹158004
SNACK-2	SNACK2.BS	Double	537 x 446 x 203 mm	220-230-240	1647-1960	7.5-8.2	19 kg	255948

All Hatco/Suntec Snack System Models Feature:

Models Shipped with: A cleaning brush, tool for switching out plates, standard Round Belgian Waffle Plates and an additional set of plates of your choosing.
Cord Location: Back of unit, bottom left-hand side.

ACCESSORIES


(available for purchase at any time)

Interchangeable Cooking Plates –

FREESTYLE	Freestyle Plates	₹26376
BELGIAN	Belgian Plates	26376
HEART WAFFLE	Norwegian Waffle Plate	26376
COFFEEBEAN	Coffee Bean Plates	26376
SANDWICH	Sandwich Plates	26376
PANINI	Panini Plates	26376
DONUT	Donut Plates	26376
CHELKY	Chelky Plates	26376
WM-BRUSH	Nylon Brush	₹1848



WM-BRUSH accessory

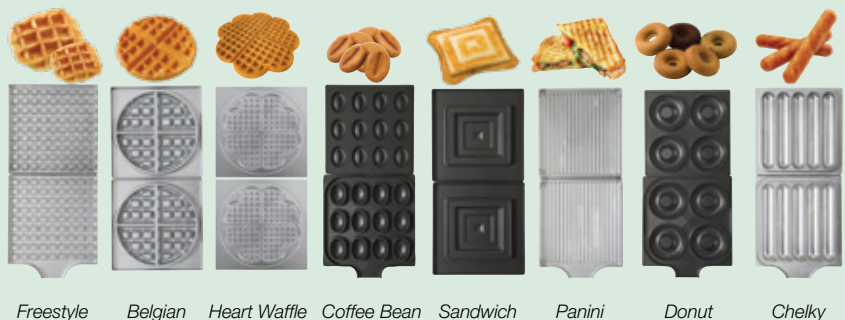

Freestyle

Belgian

Heart Waffle

Coffee Bean

Sandwich

Panini

Donut

Chelky

SNACK - x



Snack System

1 = Single Head
2 = Dual Head

Flip Waffle Maker

Hatco/Suntec Flip Waffle Makers produce excellent, authentic 32 mm thick, round Belgian waffles. Their unique heating elements and 180° swivel mechanism ensure even cooking, while a thermostatic control and a programmable timer deliver consistent, repeatable results. Adjustments to temperature and time can be made to suit any batter and the unit is memory retentive so you may only have to program it once.

- Commercial food service quality – designed for many hours of continuous use, every day
- Heavy duty stainless steel construction with Teflon® coated aluminum plates
- Simple push-button control panel features a stand-by on/off, timer/temperature toggle, higher/lower selection, and start
- Easy to see bright red LED display shows settings and countdown when cooking
- Timer starts automatically when waffle maker is closed and resets when opened, while a beeper signals the end of a cooking cycle
- Fast initial heat up time, excellent heat retention and recovery delivers high productivity

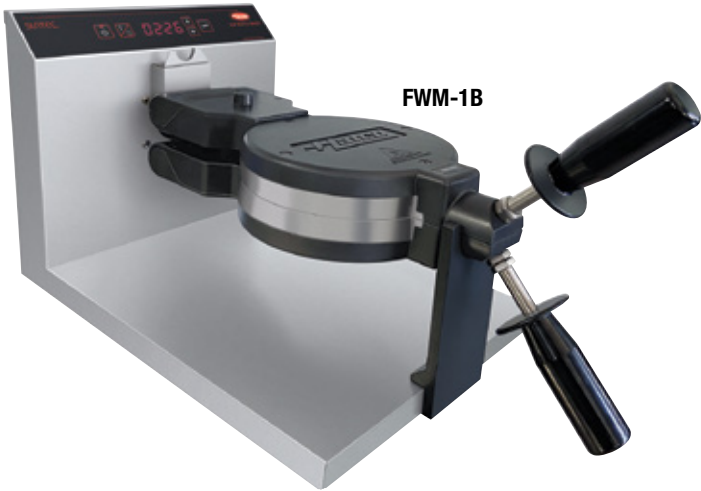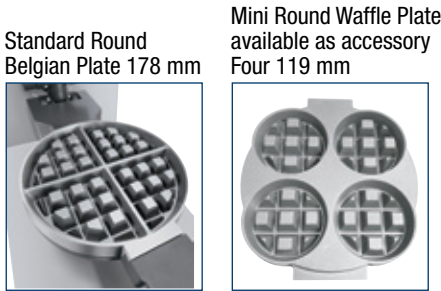


FLIP WAFFLE MAKER

Model	Item Number	Description	Dimensions (W x D x H)	Voltage	Watts	Amps	Approx. Ship Weight	List Price
FWM-1B	FWM1B.BS	Round	295 x 581 x 295 mm	220-240	1235-1470	5.7-6.2	12 kg	₹203364

All Hatco/Suntec Flip Waffle Maker Models Feature:
Models Shipped with: cord and plug.
Cord Location: Back of unit, lower left side.

ACCESSORIES (available for purchase at any time)

WM-BRUSH	Nylon Brush	₹1848
WAF-FORK	Waffle Fork	672
MINI-WAFFLE	Mini Waffle Plate	8148



Rectangular Waffle Makers

Hatco®/Suntec Rectangular Waffle Makers cook continuous, excellent-quality waffles for commercial kitchens, display cooking locations, and buffets. The adjustable time and temperature controls enable operators to cook consistent quality waffles from a variety of different batters.

- Exclusive heating elements provide exceptional heat distribution throughout the entire cooking plate, ensuring even cooking of each waffle
- Stainless steel frame, cast aluminum cooking plates
- Belgian-style cooking plates produce 25 mm thick waffles
- LED display shows timer, temperature and status information
- Simple push button control panel featuring a stand-by On/Off, timer/temp toggle, higher/lower selection, and start/stop
- Fast initial heat-up time, excellent heat retention and recovery delivers high productivity and consistent results



RCTWM-2B with Belgian plate



RCTWM-1B with Belgian plate

RECTANGULAR WAFFLE MAKERS

Model	Item Number	Description	Dimensions (W x D x H)	Voltage	Watts	Amps	Approx. Ship Weight	List Price
RCTWM-1B	RCTWM1B.BS	Single, Rectangular, Belgian	244 x 366 x 203 mm	220-240	823-980	3.7- 4.0	7 kg	₹108864
RCTWM-2B	RCTWM2B.BS	Dual, Rectangular, Belgian	498 x 366 x 203 mm	220-240	1647-1960	7.5-8.2	15 kg	174552


All Hatco/Suntec Rectangular Waffle Maker Models Feature:

Models Shipped with: Stainless Steel frame and aluminum cooking plates, On/Off power switch, multi-function control panel, removable drip tray, nylon brush and a 1829 mm cord and plug.

Cord Location: Back of unit, lower left corner.

ACCESSORY (available for purchase at any time)

WM-BRUSH	Nylon Brush	₹1848
-----------------	-------------	--------------



High-Speed
THERMMAX®
Salamander


TMS2-1H is Hatco's second generation high-speed Salamander with electronic controls. Using a gravity sensor and infrared technology, the optimum temperature is reached instantly and efficiently when food products are placed on the grill plate.

- Instant-On heating elements in the upper housing
- Plate detection feature activates the Instant-On heating elements when a food plate or pan is placed on the grill plate, and deactivates when removed
- Heating elements are only on when in use, eliminating residual heat in the kitchen
- Made of stainless steel for easy cleaning and durability
- Can be placed on a countertop or wall-mounted
- Hold mode could be adjusted to save 25%-50% power
- Adjustable upper housings give 170 mm of vertical movement
- Flat, tactile control panel



THERMMAX SALAMANDER								
Model	Dimensions W x D x H	Cooking Area W x D x H	Voltage	Watts	Amps	Phase	Approx. Ship Weight	List Price
TMS2-1H	630 x 530 x 568 mm	557 x 387 x 90-262 mm	230 230/400	4133 4133	18 6.0	1 3	77 kg	₹302652

All THERMMAX Salamander Models Feature:
Models Shipped with: Grill, drip pan and wall mounting bracket.



THERMMAX® Salamander

Hatco's THERMMAX® Salamander is specially designed for versatility in the kitchen with the capabilities to cook, grill and reheat food. The unparalleled start-up speed is a result of "Instant/On" heating elements located in the upper housing of the salamander. The THERMMAX Salamander is energy efficient and easy to operate.

- The high-powered heating elements are ready for use within 8 seconds
- Two sets of independently-controlled heating element sections give the benefits of flexibility and energy conservation
- Cook mode selection switch controls left, right or both locations
- Made of stainless steel for easy cleaning and durability
- Can be placed on a countertop or mounted to a brick or cement wall



THERMMAX SALAMANDER

Model	Dimensions W x D x H	Voltage 50/60 Hz	Phase	Cooking Area W x D x H	Watts	Amps	Approx. Ship Weight	List Price
TMS-1	600 x 503 x 515 mm	230/400	3	540 x 373 x 90-260 mm	4000	8.7	72 kg	₹264348

All THERMMAX Salamander Models Feature:

Models Shipped with: Grill, drip pan and wall mounting bracket.

Cooking Area: 540 W x 373 D x 90-260 H mm.

Power Location: Hardwired, back of unit, lower right corner.

Specialty Water Equipment



FLOWMAX® Under-Counter Water Dispenser

The Hatco FLOWMAX® Under-Counter Water Dispenser delivers hot or ambient water for food preparation, drinking or cleaning. With a temperature range from 65° - 95°C and programmable on-demand dispense volume, you have hot water at your fingertips.

- 5 liter stainless steel tank
- Stylish faucet design with a tear-drop shape base mount and easy-touch controls
- Energy-saving, programmable power-save mode
- Built-in filter with a 0.5 micron rating



UNDER-COUNTER WATER DISPENSER

Model	Dimensions		Voltage	Watts	Hz	Amps	Approx. Ship Weight	List Price
	Above counter W x D x H	Under-counter unit W x D x H						
FM-5	46 x 46 x 167 mm	342 x 362 x 391 mm	230	1800	50/60	7.8	19 kg	₹202356

All Under-Counter Water Dispenser Models Feature:

Models shipped with: 5 liter stainless steel tank, 125 mm faucet extension, drain font, a water filter and a 1.3 m cord and plug set.

Liquid Capacity: 25 liters hot water per hour.

Cord Location: Rear right from front view.



Faucet extension adds 130 mm to height on top




Faucet touch control - Hot and Ambient -



Under-counter main unit



Under-counter main unit control panel

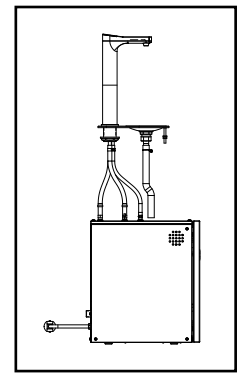

Drawing of unit, above and under counter

FLOWMAX **FM - 5** Water Tank Capacity (liters)

Food Pans And Trivets




PIZZA PANS
14"PIZZA PAN
16"PIZZA PAN
18"PIZZA PAN



ST PANS
ST PAN 1/3
ST PAN 1/2
ST PAN 2
ST PAN 4

FOOD PANS

Model	Description	Dimensions	List Price
ALUM PAN	Half-Size Sheet Pan	457 W x 330 D mm	₹3108
18"SHEET PAN	Full Size Sheet Pan	457 W x 660 D mm	4368
14"PIZZA PAN	Perforated Pizza Pan	356 mm Diameter	3360
16"PIZZA PAN	Perforated Pizza Pan	406 mm Diameter	3864
18"PIZZA PAN	Perforated Pizza Pan	457 mm Diameter	4032
ST PAN 1/3	Third-Size Stainless Steel Pan	324 W x 175 D x 64 H mm	5712
ST PAN 1/2	Half-Size Stainless Steel Pan	324 W x 264 D x 64 H mm	6552
ST PAN 2	Full-Size Stainless Steel Pan	324 W x 527 D x 64 H mm	7812
ST PAN 4	Full-Size Stainless Steel Pan	324 W x 527 D x 102 H mm	9828




HDW TRIVET



HDW-SPLASH



HDW 6" PAN



Additional Humidity


- A. Stainless Steel Food Pan
- B. Splash Baffle
HDW-SPLASH Accessory
- C. Water/Spillage Pan (add 6 mm of water)
HDW-SPILL Accessory

FOOD PANS AND TRIVETS

Model	Description	Dimensions	List Price
HDW-TRIVET	Custom Trivet raises food product	13 mm off bottom of pan	₹ 5880
HDW-SPLASH	Splash Baffle (One per drawer)		5460
HDW-SPILL	Water/Spillage Pan (one per drawer)		25872
HDW 6" PAN	Full-Size Stainless Steel Food Pan	324 W x 527 D x 152 H mm	10668

FOOD PANS AND TRIVETS

Model	Description	Dimensions	List Price
Wire Trivets Stainless –			
TRIVET (1/2)SS	Half-Size	259 W x 194 D mm	₹10584
TRIVET SS	Full Size	257 W x 457 D mm	14700



TRIVETS
TRIVET (1/2)SS
TRIVET SS



General Information

Price Policy: Prices are in Rupees and are subject to change without notice. Prices and discounts apply to accessories at time of initial equipment order only, not when ordered at a later date.

Instructions for payment remittance:

Bank Name: CITIBANK N.A.
Bank Account Number: 714897012
Bank Account Name: Hatco Foodservice Equipment India Private Limited
IFSC/RTGS Number: CITI0100000

Standard Shipment Terms: EX Works Hosur, Tamil Nadu India

ALL HATCO PRODUCTS SHIPPED WITH INSTALLATION AND OPERATING INSTRUCTIONS.
 CONSULT LOCAL CODES BEFORE INSTALLING EQUIPMENT.

E-mail orders to: ordersindia@hatcocorp.com.

Telephone: +91-8870-920-999

Technical Service Questions:
technicalserviceindia@hatcocorp.com

Parts and Equipment Questions:
customerserviceindia@hatcocorp.com

www.hatcocorp.com

Hatco products are manufactured for commercial use only.

See product specification sheet for the appropriate approvals.

Ordering Procedures

CUSTOMER NOTE –

To ensure prompt and accurate processing of your order, please provide the following information:

ALL PRODUCTS –

1. Model number, voltage and phase.
2. Specify options and accessories as required. Options are not retrofittable.
3. Consult factory when ordering equipment for special applications.
4. e-mail orders are acceptable and do not require confirmation.


Limited Warranty

For the full information pertaining to the Hatco warranty protection for your equipment, go to our website at:

www.hatcocorp.com

Step 1: Make sure you have the correct region selected

Step 2: In the **SUPPORT** drop-down, select **WARRANTY**

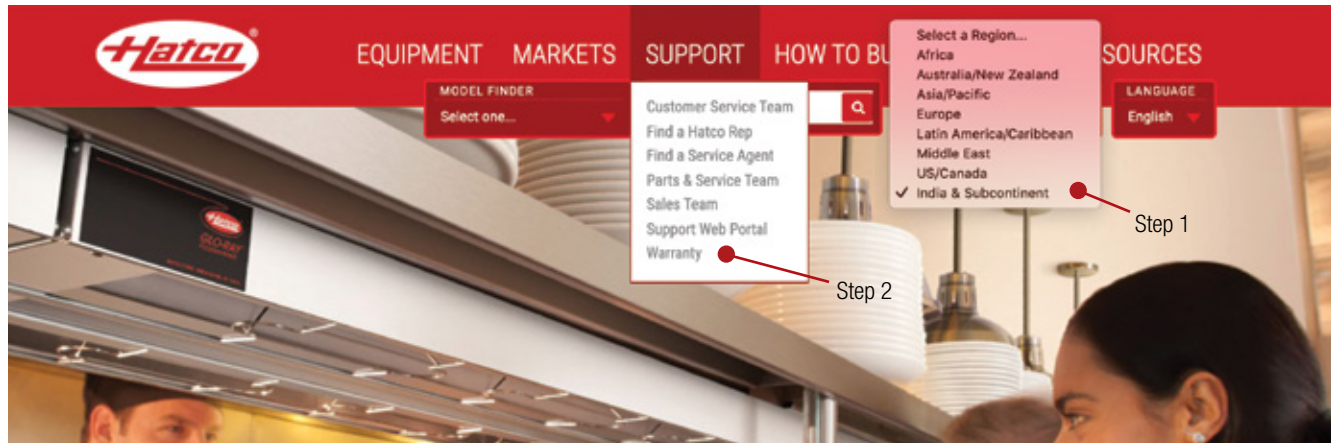

Water Quality Requirements

Water supply in excess of 0,75 grains of hardness per liter (GPL) must be treated and softened before being used. Water containing over 0,75 GPL will decrease the efficiency and reduce the operating life of the unit.

NOTE: Product failure caused by liming or sediment buildup is not covered under warranty.

Returns

No product will be accepted on a return shipment without a Material Return Authorization from Hatco Sales Department. Products returned at customer's convenience are subject to inspection and a restocking

charge of 25% of EX-WORKS, freight and related expenses for shipper's account; contact Hatco.

Damaged Freight Policy

All freight should be inspected during the receiving process for possible damage. Should there be a question about the condition of the equipment, it is better to refuse the shipment. If damage is found after delivery, it is the consignee's (receiver) responsibility to notify the carrier within (24) hours of delivery.


All Hatco Shipments specify an Incoterm 2010 in which the shipment was made. Incoterms determine who bears the risk of cargo damage or loss at any given point of shipment and therefore who pays in the event of loss or damage. If it is found that any part of the shipment has sustained damage during transportation, Hatco Corporation must be contacted as well as immediately notifying the last carrier.

For assistance, contact Hatco via e-mail at: customerserviceindia@hatcocorp.com and provide information listed below:


1. Hatco Shipment Number
2. Delivery date and date damage was discovered
3. Contact name, phone number and email address
4. Type of unit damaged including model and serial number
5. Extent of damage
6. Pictures of damage as well as packaging



Hatco has a wealth of resources to help you choose and order the correct equipment with ease. Log on to the Hatco website: www.hatcocorp.com and look under the “Resources” panel on the right hand side of the page.

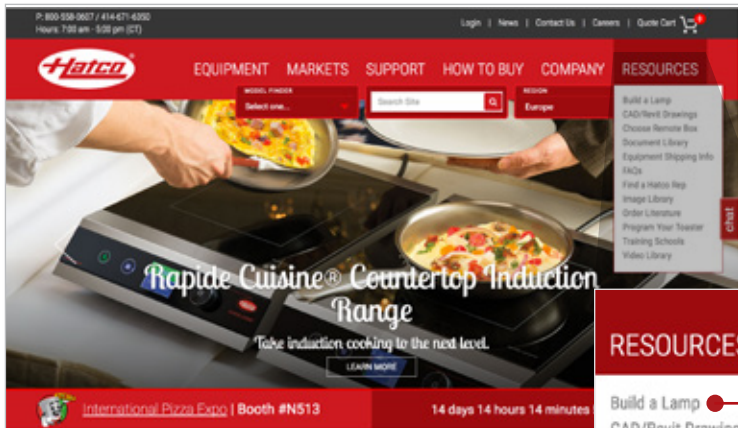


BUILD A LAMP

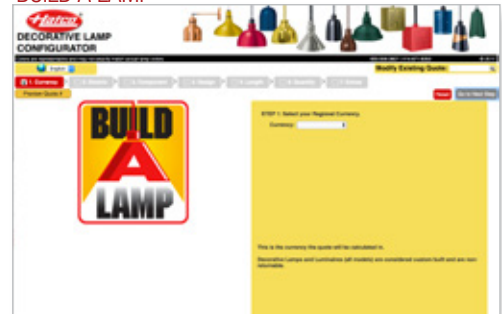


RESOURCES

- Build a Lamp
- CAD/Revit Drawings
- Choose Remote Box
- Document Library
- Equipment Shipping Info
- FAQs
- Find a Hatco Rep
- Image Library
- Order Literature
- Program Your Toaster
- Training Schools
- Video Library

DOCUMENT LIBRARY

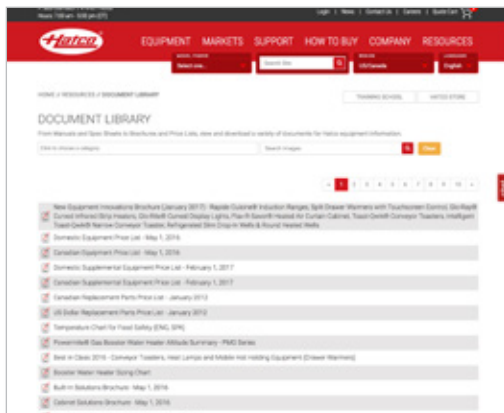

CHOOSE REMOTE BOX

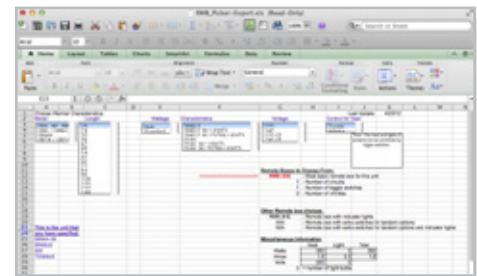

EQUIPMENT SHIPPING INFO



VIDEO LIBRARY


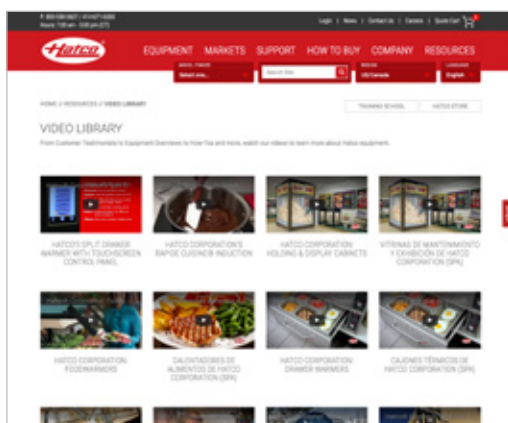


IMAGE LIBRARY

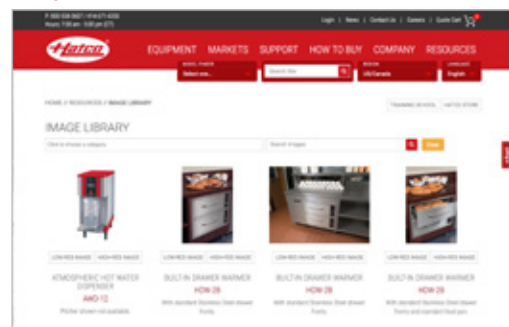

[illegible]

Product Index

TOASTERS	2-9	BUILT-INS	86-103
WELLS	10-39	DRAWER WARMERS	104-110
DECORATIVE LAMPS & DISPLAY LIGHTS	40-48	HEATED MERCHANDISERS	111-125
STRIP HEATERS	62-74	HOLDING & DISPLAY CABINETS	126-141
FRY STATIONS	65-69	INDUCTION EQUIPMENT	136-145
CARVING STATIONS	70-72	LIGHT COOKING EQUIPMENT	147-158
PORTABLES	73-85	SPECIALTY WATER EQUIPMENT	153-154


CDW.....	107	GRBW.....	84-85	HWB-43.....	28-29, 32, 35-36
CSSBR, CSSBX.....	90	GRCD, GRCDH.....	122-123	HWB-xQT.....	28-29, 33, 35-36
CSSBFR, CSSBFX.....	91	GRCMW.....	121	HWBI, HWBI43.....	22-24, 27, 35-36
CSUR, CSUX.....	93	GRCSCL, GRCSCLH.....	72	HWBI-S.....	25-27, 35-36
CSBFR, CSBFX.....	92	GRFF, GRFFL, GRFFB, GRFFBL.....	66-67	HWBI-xQT.....	28-29, 34, 35-36
CWBR, CWBX.....	16-17, 19	GRFHS, GRFS.....	68-69	HXMH, HXMH-xxD.....	117-118
CWBR-S, CWBX-S.....	16, 18-19	GRH.....	63-64	HXMS, HXMS-xxD.....	117-118
DCS.....	71	GRHD, GRHDH.....	124-125	IHDCH.....	134-135
DCSB2..... <i>NEW</i>	71	GRHW.....	83	IRNG-PC1, -PB1.....	140-141
DL, DLL, DLH.....	41-46	GRS2GC.....	127	IRNG-PC2, -PB2.....	142-143
FDWD-1-MN.....	137	GRS.....	80-82	ITQ.....	3
FDWDE.....	129, 133	GRSB.....	100-101	IWB, IWB-S.....	13-15
FM-5.....	154	GRSBF.....	102-103	IWELB-FUL-A.....	139
FS2HAC.....	141	GRSDH, GRSDH-xxD.....	113-114	IWRM.....	144-145
FSD, FSDT.....	130-133	GRSDS, GRSDS-xxD.....	113-114	MDW.....	136
FSHAC.....	141	GRSDS/H.....	112	PG14..... <i>NEW</i>	149
FSHC-6W.....	139	GRSR.....	74	PWB, PWC.....	128
FSHC-7.....	140	GRSS.....	77	RCTHW2.....	39
FSHC-EE.....	138	GRSSB.....	97	RCTWM.....	151
FST-1-MN.....	137	GRSSR, GRSSR20-DL77516.....	75-76	RHW..... <i>NOT AVAILABLE</i>	38
FTBR, FTBX.....	20-21	HBG.....	78	RHW2..... <i>NEW</i>	11
FTBR-S, FTBX-S.....	20-21	HGBG, HGBGH.....	98-99	RMBs.....	73
FWM.....	150	HCSBFR, HCSBFX.....	96	SNACK.....	152
GM5AH.....	49, 51	HCSSBR, HCSSBX.....	94	TK.....	9
GM5AHL.....	50-51	HCSBFR, HCSBFX.....	95	TM.....	6
GMFFL.....	66	HDM.....	105	TM3.....	5
GMHD, GMHDH.....	120	HDW.....	108-110	TMS.....	158
GR2BW.....	84-85	HDWTC.....	106	TMS2.....	157
GR2SDH, GR2SDH-xxD.....	115-116	HDW-xR2.....	108, 110	TPT.....	4
GR2SDS, GR2SDS-xxD.....	115-116	HGSM.....	79	TQ.....	8
GR3SDS-xxDCT, GR3SDS-xxTCT.....	119	HSBF-GL, -HC, -SS.....	87-89	TQ3.....	7
GRAH, GRAHL.....	63-64	HLC5.....	47	UGAH, UGAHL.....	69, 71
GRAH-xxD, GRAHL-xxD.....	65-66	HW-13.....	12	UGAH-xxD, UGAHL-xxD.....	70-71
GRAIH, GRAIH-xxD.....	67-68	HW-FUL.....	37, 35-36	UGFF, UGFFL, UGFFB, UGFFBL.....	66-67
GR-B.....	66	HWB-FUL.....	28-31, 35-36		

Paint Chip and Stone Sample Colors

DESIGNER COLORS



GLOSS FINISHES

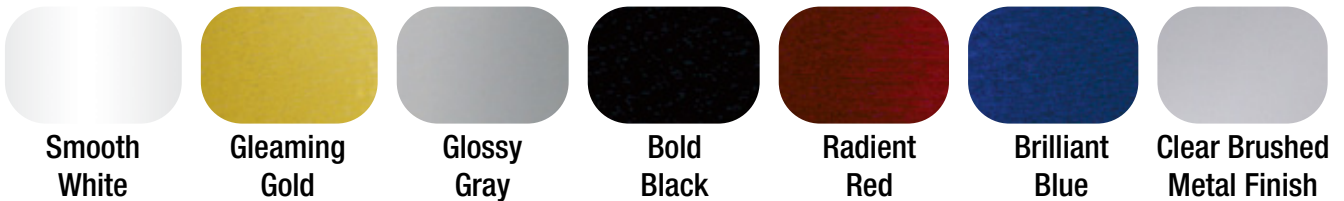


PLATED FINISHES



SIMULATED STONE* COLORS



DEKTON STONE** COLORS

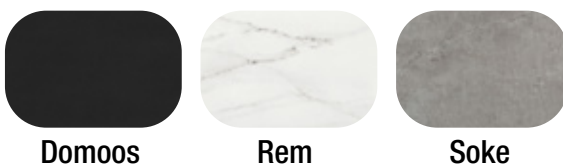

*Colors are a representation and may not exactly match our colors.
Consult factory for possible color matching options on these colors.
Non-standard colors are non-returnable.*

To order a Hatco Paint Chip & Stone Sample Colors Sheet, visit www.hatcocorp.com / Order Literature / Sales Literature / Sell Sheets.

* Simulated stone is Swanstone®

** Due to the natural texture, patterns may vary.



People who serve, products that solve.™

Hatco foodservice equipment
India Private Limited
Hatco India Registered Office:
54 Deepak Building, 13 Nehru Place
New Delhi - 110019, India

Warehouse/Customer Service Support +91-8870-920-999:
No 5/486-1, C Krishna group Compound, SIPCOT Post,
Hosur, Krishnagiri District, Tamil Nadu, 635126, India
ordersindia@hatcocorp.com • www.hatcocorp.com
Rupee Price List • September 1, 2025